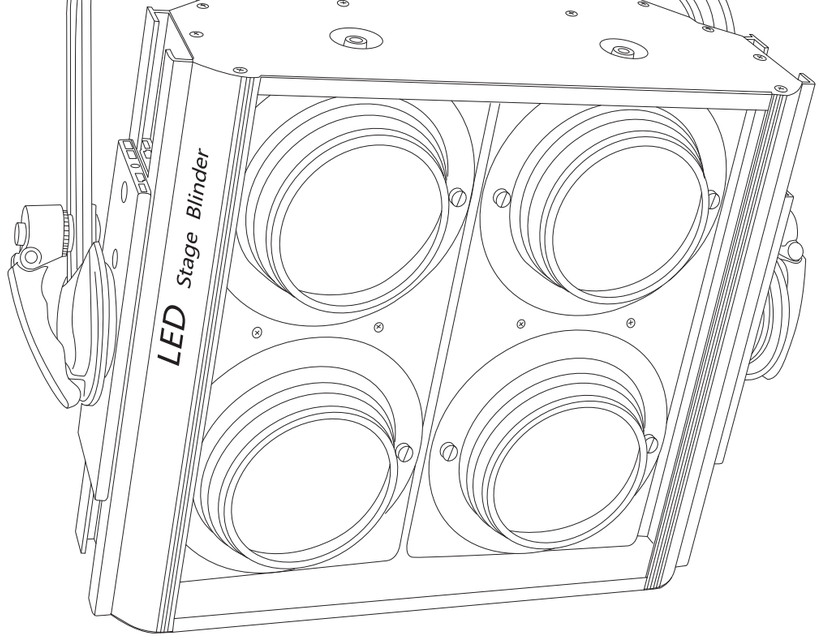


INNOVATION
DIFFERS FOR INTELLIGENCE
创新・因智慧而不同

DunDi®
敦帝灯光
DUNDI LIGHT

广州敦帝舞台设备有限公司
Guangzhou Dundi Stage Equipment Co., Ltd.

广州敦帝舞台设备有限公司
Guangzhou Dundi Stage Equipment Co., Ltd.
ADD：No.22 South Street Westlake Renhe Town Baiyun District Guangzhou China.
TEL：020-36035818
E-mail：dd@dd-lite.com

www.dd-lite.com

If there is any change of the products,no inform again.it depend on the real subject.

LED 观众灯特性：


- 光源采用欧司朗3-5W（3030）或科锐3-5W（3535）LED光源，该光源出光效率高，散热好。
- 光学系统是按该灯特点设计的组合非球面光路。使出光效率高，光斑均匀，无黄边蓝边现象。
- 该灯散热系统是根据该灯的结构特点和光源发热特点设计定做的散热铝材和风扇。使该产品散热极佳，噪音低。
- 软件是由本行业国际顶级工程师设计，采用最先进的CPU，16比特以上无抖动平滑线性调光。调光频率17K以上。控制通道可以按现场使用情况在1通道和9通道两种模式选择。
- 色温按客户需求可以在2700K至6500K 范围选择，显色指数可以在70%至97%范围选择。
- 该产品输入电源可以多台输入输出、相互相串。
- 该产品灯体采用铝合金材料组成，可多台任意组合。
- LED四眼观众灯比传统四眼观众灯（2600W）亮度还要高，光斑还要均匀，是一款很有价值的低耗能高效率、性价比极高的产品。

LED Stage Blinder Features:

- Using Osram 3-5W (3030) or Cree 3-5W (3535) LED light source which is extremely efficiency with good heat radiation.
- Optical system: High efficiency and even beam with no dispersion due to the Aspherical Lens
- Radiation system are using Aluminum radiators and Ultra-quiet fan.
- Software are Designed by International Top lighting engineer. Latest version CPU and 16bit smoothly dimming. More than 17K
  dimming frequency. The DMX CHS can adjust between 1CHS and 9 CHS according to meet different situation.
- Color Temperature and CRI Customizable: Color Temperature can be decide by customer from 2700K-6500K and CRI can be choose from 70% to 97%
- Power output / input connection in series.
- The light house are using Aluminum Alloy which is very Durable and Designed to be Multiple combined.
- Compare with conventional Blinder（2600W）, The light of LED Stage blinder4 （320W） are much brighter and more even beam with Very Low Consumption. It is a very cost effective “Green” Product .

LED 观众灯组合拼装

LED Stage Blinder Combination

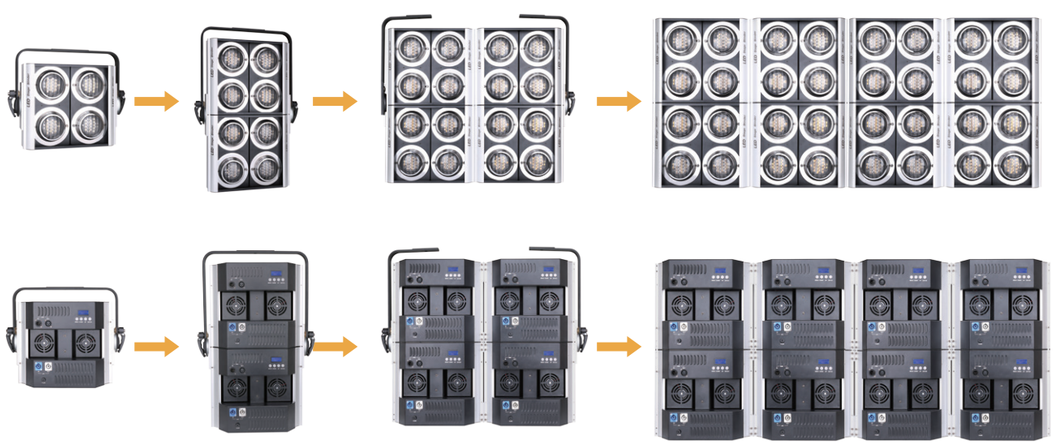


DD-LED4A

LED 四眼观众灯-A　LED Stage Blinder 4-A

额定电压：AC100-240V 50-60Hz
总 功 率：360W
光源功率：320W
光　　源：有4个模组LED 光源，每个模组
LED光源由21颗欧司朗3030（每颗3-5W）
LED光源或科瑞 3535（每颗3-5W）
LED 光源组成。
色　　温：2700K-6500K 可选
显色指数：70%-97%可选。
控制信号：DMX
通道模式：1通道、9通道，两种通道模式可选择
控制模式：DMX 信号控制或者手动按键操作控制。
内 尺 寸：405x480x165mm
包装尺寸：480x540x230mm
净　　重：9.2kg
毛　　重：10.8kg

Voltage：AC100-240V 50-60Hz
Total Consumption：360W
Light Source Power：320W
Light Source：4 modules LED light source,
Each module using 21 pcs of Osram 3030
(Each pcs 3-5W) or Cree 3535(Each pcs 3-5W)
CCT：2700K – 6500K Customizable
CRI：70%-97% Customizable
Control Signal：DMX
Channel Mode: 1CH,9CH, Two Options.
Control Mode：DMX or Manual Operation
Product Size：405x480x165mm
Package Size：480x540x230mm
Net Weight：9.2kg
Gross Weight：10.8kg






B	H2	H1	H	L1	L
165	430	262	358	480	373

DD-LED4B

LED 四眼观众灯-B　LED Stage Blinder 4-B

额定电压：AC100-240V 50-60Hz
总 功 率：300W
光源功率：260W
光　　源：有4个模组LED 光源，每个模组
LED光源由18颗欧司朗3030（每颗3-5W）
LED光源或科瑞 3535（每颗3-5W）
LED 光源组成。
色　　温：2700K-6500K 可选
显色指数：70%-97%可选。
控制信号：DMX
通道模式：1通道、9通道，两种通道模式可选择
控制模式：DMX 信号控制或者手动按键操作控制。
内 尺 寸：405x460x165mm
包装尺寸：480x540x230mm
净　　重：8.7kg
毛　　重：10.3kg

Voltage：AC100-240V 50-60Hz
Total Consumption：300W
Light Source Power：260W
Light Source：4 modules LED light source,
Each module using 18 pcs of Osram 3030
(Each pcs 3-5W) or Cree 3535(Each pcs 3-5W)
CCT：2700K – 6500K Customizable
CRI：70%-97% Customizable
Control Signal：DMX
Channel Mode: 1CH,9CH, Two Options.
Control Mode：DMX or Manual Operation
Product Size：405x460x165mm
Package Size：480x540x230mm
Net Weight：8.7kg
Gross Weight：10.3kg





B	H2	H1	H	L1	L
165	415	236	356	460	380

DD-LED8A


LED 八眼观众灯-A

LED Stage Blinder 8-A

LED 八眼观众灯-A是由两台LED 四眼观众灯-A组成
LED Stage Blinder 8-A is combined by two LED Stage Blinder 4-A

Product Size：730x480x165mm
Package Size：805x540x230mm
Net Weight：17.5kg Gross Weight：20kg





B	H1	H	L1	L
165	405	650	480	373

DD-LED8B


LED 八眼观众灯-B

LED Stage Blinder 8-B

LED 八眼观众灯-B 是由两台LED 四眼观众灯-B组成
LED Stage Blinder 8-B is combined by two LED Stage Blinder 4-B

Product Size：730x460x165mm
Package Size：805x540x230mm
Net Weight：16.8kg Gross Weight：19.3kg






B	H1	H	L1	L
165	415	665	460	373

广州敦帝舞台设备有限公司
Guangzhou Dundi Stage Equipment Co., Ltd.
ADD：No.22 South Street Westlake Renhe Town Baiyun District Guangzhou China.
TEL：020-36035818
E-mail：dd@dd-lite.com

www.dd-lite.com

If there is any change of the products,no inform again.it depend on the real subject.

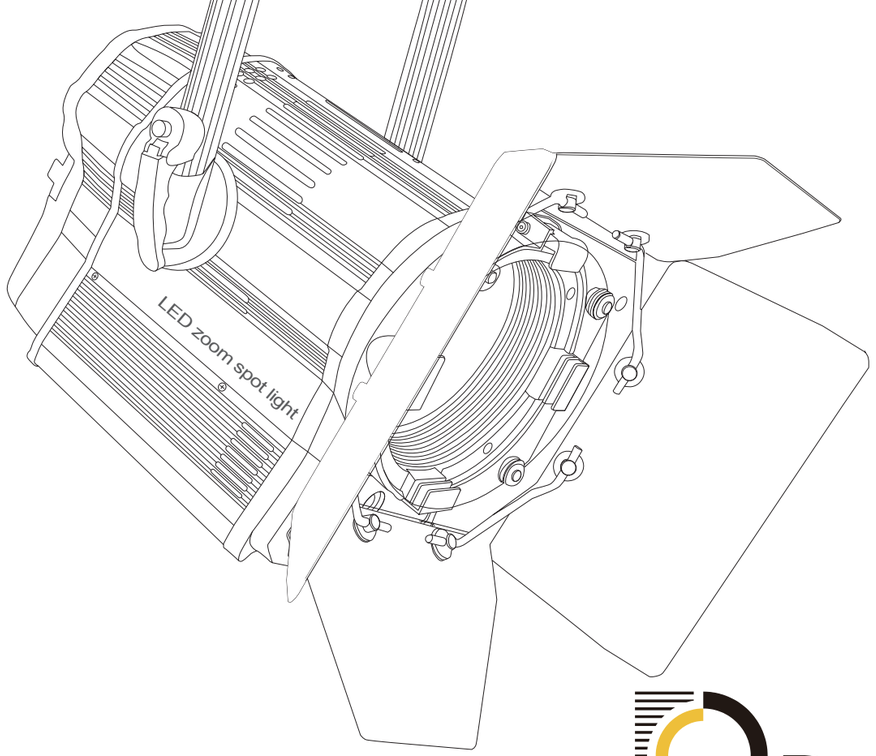

INNOVATION
DIFFERS FOR INTELLIGENCE
创新・因智慧而不同

DunDi®
敦帝灯光
DUNDI LIGHT



广州敦帝舞台设备有限公司
Guangzhou Dundi Stage Equipment Co., Ltd.



Low Cost with high effect

ZS-W LED Zooming spotlight is a high performance fixture with maximum 300W consumption.Linear dimming and extremely silent fan is designed to use for any circumstances such as TV studio,theater,event,opera house,etc.CT tuneable function make it capable to display cool white and warm white with only one fixture.

Features

- **LED source**: 84 pcs of OSRAM(3030) or CREE(3535) LEDs
- **Long service life**: More than 50,000 hours
- **CT turning**: Flicker-free color temperature turning from 3200k to 6500k.
  (**Customizable**: Color Temperature tuneable or fixed Color temperature customize according to Customer's Order.)
- **CRI more than 90% and 97% Maximum.**(Depends on different Color Temperature.)
- **Barn Door**:4 rotating barn doors with damping which is 360° rotation that make it stable installation.
- **DMX**: Linear Dimming ,CT turning,Zooming functions.
- **Control**: Local or DMX
- **Fly-Eye Zooming**: Smooth zooming with Fly-Eyes aspherical lens.
- **Wide beam angle**: 18-65°

Optical

- **Symmetric light spot**: Using 252pcs Aspherical tiny lens to make the light symmetric.
- **Dimming**: 16 byte Linear dimming without color temperature shifting.
- **CT turning**: Flicker-free CT turning from 3200k to 6500k.
- **Beam Shaping**: Barn doors shaping.(With no double-Image)

Construction

- **PSU**: Bulit-in electronic flicker-free power supply
- **Fixture House**: Durable aluminum alloy body which can color customized (Black,Silver,White,etc)
- **Cooling system**: Whole aluminum heatsink and extremely quiet automatically adjusting fan.Ideal for TV studio and Opera house. (Lower than 30 Db when the Power Consumption is 100W)


Electrical

- **Voltage**: AC100-240V / 50-60HZ
- **Power consumption**: 100W、200W、300W
  Power Adjustable:Power can be adjust from 100W to 300W.

Dimensions， weight and volume

- **Net weight**: 8.5kg
- **Gross weight**: 10.5kg
- **Dimension**: 400x300x415mm
- **Package size**: 535x345x335mm

Pattern piece

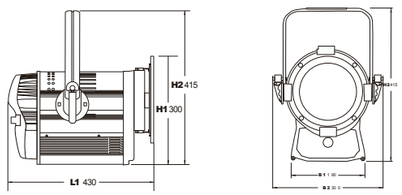

L1	430
L2	300
H1	300
H2	415
H	415

Telemetrics Dates

LED 300W ZS-WT Zoom Spotlight (CT tuneable)

CT	Distance	Angle	Lux	Beam Diameter
3200K	5m	18°	2938	1.4m
	10m	18°	813	3m
	15m	18°	425	4m
5600K	5m	18°	5200	1.4m
	10m	18°	1550	3m
	15m	18°	813	4m
6500K	5m	18°	2613	1.4m
	10m	18°	763	3m
	15m	18°	400	4m
3200K	5m	65°	700	4m
	10m	65°	238	10m
	15m	65°	138	15m
5600K	5m	65°	1288	4m
	10m	65°	475	10m
	15m	65°	250	15m
6500K	5m	65°	663	4m
	10m	65°	225	10m
	15m	65°	125	15m

LED ZS-WF Zoom Spotlight(3200K)

Comsum-ption	Distance	Angle	Lux	Beam Diameter
300W	5m	18°	4500	1.4m
	7.5m	18°	2038	2.1m
	10m	18°	1288	3m
	12.5m	18°	900	3.45m
	15m	18°	675	4m
200W	5m	18°	3000	1.4m
	7.5m	18°	1375	2.1m
	10m	18°	875	3m
	12.5m	18°	613	3.45m
	15m	18°	388	4m
100W	5m	18°	1588	1.4m
	7.5m	18°	725	2.1m
	10m	18°	450	3m
	12.5m	18°	325	3.45m
	15m	18°	238	4m
300W	5m	65°	1500	6.1m
	7.5m	65°	763	8.5m
	10m	65°	413	10.7m
	12.5m	65°	363	13.2m
	15m	65°	250	15.8m
200W	5m	65°	1000	6.1m
	7.5m	65°	538	8.5m
	10m	65°	350	10.7m
	12.5m	65°	238	13.2m
	15m	65°	175	15.8m
100W	5m	65°	525	6.1m
	7.5m	65°	275	8.5m
	10m	65°	175	10.7m
	12.5m	65°	125	13.2m
	15m	65°	100	15.8m

LED ZS-WF Zoom Spotlight(6500K)

Comsum-ption	Distance	Angle	Lux	Beam Diameter
300W	5m	18°	5250	1.4m
	7.5m	18°	2525	2.1m
	10m	18°	1638	3m
	12.5m	18°	1150	3.45m
	15m	18°	850	4m
200W	5m	18°	3625	1.4m
	7.5m	18°	1750	2.1m
	10m	18°	1138	3m
	12.5m	18°	775	3.45m
	15m	18°	575	4m
100W	5m	18°	1875	1.4m
	7.5m	18°	913	2.1m
	10m	18°	588	3m
	12.5m	18°	413	3.45m
	15m	18°	313	4m
300W	5m	65°	1688	6.1m
	7.5m	65°	875	8.5m
	10m	65°	600	10.7m
	12.5m	65°	425	13.2m
	15m	65°	300	15.8m
200W	5m	65°	1150	6.1m
	7.5m	65°	613	8.5m
	10m	65°	400	10.7m
	12.5m	65°	288	13.2m
	15m	65°	213	15.8m
100W	5m	65°	600	6.1m
	7.5m	65°	313	8.5m
	10m	65°	213	10.7m
	12.5m	65°	150	13.2m
	15m	65°	113	15.8m



Pics:2015 International Car show using Dundi car show light.

ZS-U
LED 300W Car Show Light

- Source: LED 300W
- LED source Brand: Osram or Cree
- CONTROL: DMX/Local
- BEAM ANGLE: 17°


Telemetrics Dates

Distance	Angle	Lux	Beam Diameter
4.5m	17°	10400	1.4m
6m	17°	5930	1.8m
7.5m	17°	3920	2.2m
9m	17°	2800	2.65m
12m	17°	1790	3.35m







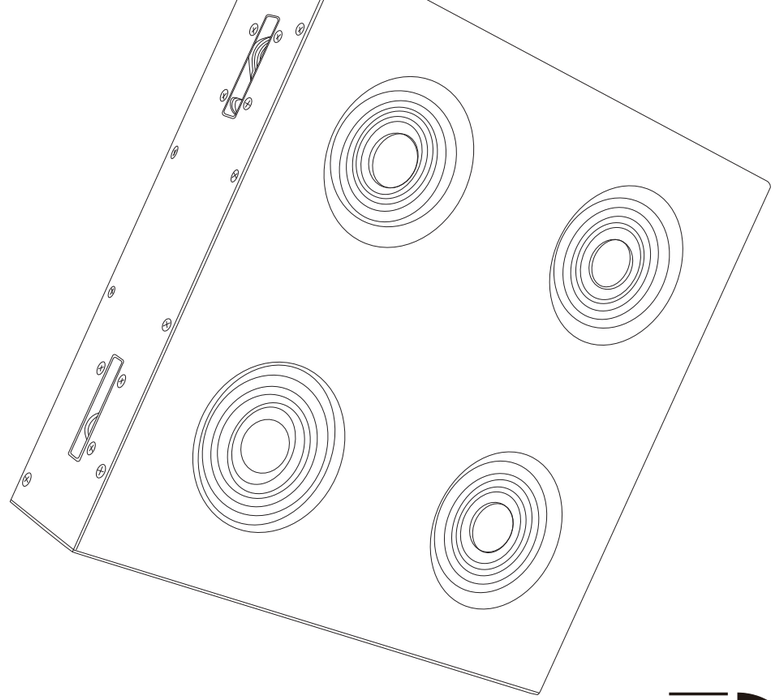

INNOVATION
DIFFERS FOR INTELLIGENCE
创新・因智慧而不同

DunDi®
敦帝灯光
DUNDI LIGHT

广州敦帝舞台设备有限公司
Guangzhou Dundi Stage Equipment Co., Ltd.

广州敦帝舞台设备有限公司
Guangzhou Dundi Stage Equipment Co., Ltd.
ADD：No.22 South Street Westlake Renhe Town Baiyun District Guangzhou China.
TEL：020-36035818
E-mail：dd@dd-lite.com

www.dd-lite.com

If there is any change of the products,no inform again.it depend on the real subject.

LED 四头白光矩阵灯特性：


- 光源采用科锐18W LED光源，该光源出光效率高，散热好，寿命长，色温按客户要求可以在2700K至6500K范围选择，显色指数达到93%以上。
- 光学系统是按该灯特定设计的反向菲涅尔透镜，出光角度小、出光效率高、光斑均匀、无黄边蓝边现象。
- 软件是由本行业国际顶级工程师设计，采用最先进的CPU、16比特以上无抖动平滑线性调光，调光频率17K以上，控制通道有3种控制通道模式选择。
- 该产品输入电源可以多台输入输出，相互相串。
- 该产品灯体和散热全部采用铝合金材料，使产品散热好，不用风扇散热，让产品在使用中没有噪音，产品特别轻巧，每台只有4.6公斤，让多台拼接更便捷。


LED 4 Heads Matrix Light Features：

- Optical light source using each module18w CREE LED chips.This product are of extremely high luminous efficiency and very effective heat radiator with long working life.Color temperature are customizable from 2700k to 6500k. CRI more than 93%.
- The optical system of this product are using reverse-fresnel lens, narrow beam angle with very high luminous efficiency with even beam.
- The software of this product are designed by one of the Top engineer of the industry.16BIT smooth flicker-free dimming,and dimming frequency higher than 17K.Have 3 channels of control mode.
- Power output / input connection in series.
- Non fan heat radiation system: Using aluminum alloy to heat sink.make this product extremely silence and also very light ,only 4.6kilo weight.

LED 四头白光矩阵灯组合拼装

LED 4 Heads Matrix Light Combination

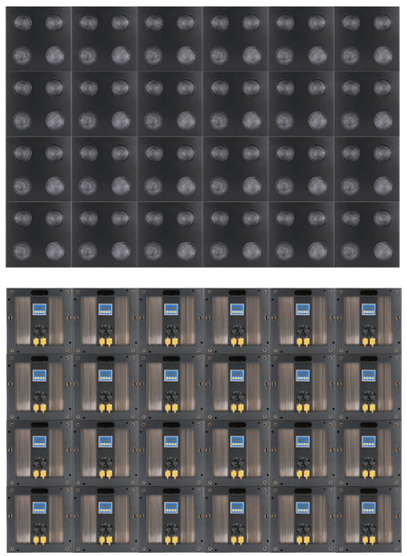

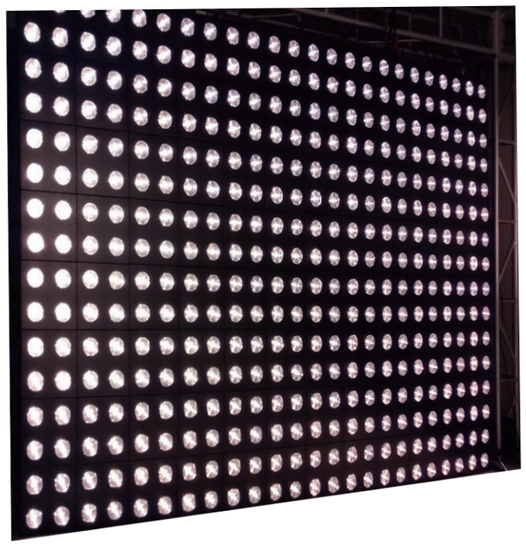

LED 四头白光矩阵灯

LED 4 Heads Matrix Light

DD-LED4TW




技术参数

额定电压：AC100-240V/50-60HZ
总 功 率：75W
光源功率：70W
光　　源：4个科锐18W COB LED
光源寿命：50000小时
出光角度：8°
色　　温：2700K-6500K可选
显示指数：2700K至3200K在93%以上
控制信号：DMX
控制模式：DMX信号控制或手动按键主从同步控制
通道模式：1通道、4通道、9通道，3种通道模式可选择
调　　光：16比特以上0-100%无抖动平滑线性调光
环境温度：-25℃~ 40℃
防护等级：防水（IP64 ）、 不防水（IP50 ）
内 尺 寸：320×320×180mm
包装尺寸：375×332×215mm
净　　重：4.6Kg
毛　　重：5Kg

Technical Parameters

Voltage： AC100-240V 50-60Hz
Consumption:75W
Light Source:70W
Light Source Type: Power source of LED 18W x 4 of Cree.
Led Life:50000 hr
Beam Angle:8°
Color Temperature: 2700k-6500k Customizable.
CRI:2700k-3200k More Than 93%
Control Signal:dmx
Control Mode:dmx Or Manual Master/slave Mode.
Channel Mode: 1CH, 4CH,9CH, Three Option.
Dimming:0-100% 16bit Smooth Flicker-free Dimming
Ambient Temperature:-25℃~ 40℃
IP Level:IP64 Or IP50
Product Size:320×320×180mm
Package Size:375×332×215mm
N.W.4.6kg
G.W.5kg

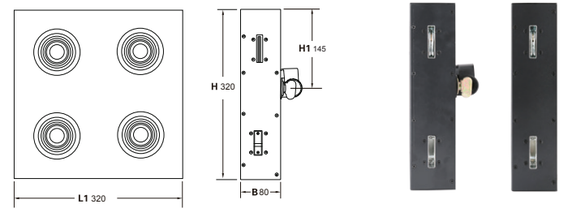


B	H1	H	L1
80	145	320	320



IP50



IP64

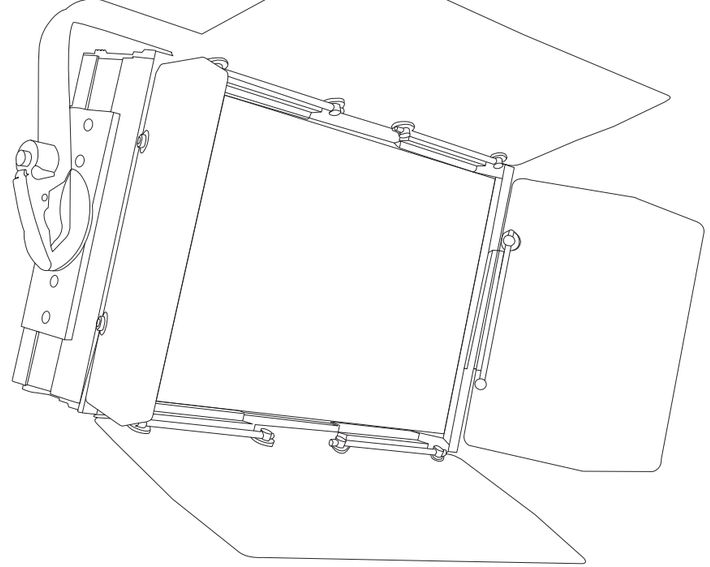

INNOVATION
DIFFERS FOR INTELLIGENCE
创新・因智慧而不同

DunDi®
敦帝灯光
DUNDI LIGHT

广州敦帝舞台设备有限公司
Guangzhou Dundi Stage Equipment Co., Ltd.

广州敦帝舞台设备有限公司
Guangzhou Dundi Stage Equipment Co., Ltd.
ADD：No.22 South Street Westlake Renhe Town Baiyun District Guangzhou China.
TEL：020-36035818
E-mail：dd@dd-lite.com

www.dd-lite.com

If there is any change of the products,no inform again.it depend on the real subject.

LED 影视平板灯
LED Studio Panel
DD-SP


LED 影视平板灯特性：

- 光源采用1440颗欧司朗0.5W LED光源，由红、绿、蓝、暖白四种颜色灯珠组成，该光源出光效率高，散热好，寿命长，寿命可达到十万小时，光衰少，使用16000小时光衰少于16%。
- 该产品散热系统是根据该产品的结构特点和光源发热特点特别设计定做的散热铝和风扇，散热好，噪音低,可使产品噪音在20dB以下。
- 软件是由本行业国际顶级工程师设计，16比特以上无抖动平滑线性调光，调光频率17K以上，控制通道有3种控制通道模式选择。
- 该产品出光品质非常好，光效高、无重影、无眩光、还原度高，CRI≥93，TLCI≥93，色温可在2700K至10000K随意调节，颜色有红、绿、蓝、暖白四种原色，可通过控制调节混合出各种颜色。

LED Studio Panel Features:

- Optical light source using 1440units of Osram LED chips.Color Mixture by RED,GREEN,BLUE AND WARM WHITE. With high luminous efficiency and excellent heat radiator,The life of the LED can last more than 100,000 hours. And the luminous decay are low,less than 16% luminous decay.
- The radiator system are made of high efficiency ,low noise and special designed according to the structure and heat-sink characters of this product.Which is lower than 20dB.
- The software of this product are designed by one of the Top engineer of the industry.16BIT smooth flicker-free dimming,and dimming frequency higher than 17K.Have 3 channels of control mode.
- This product are of very nice beam effect, high efficiency,no shadow.Color termperature tuneable from 2700K to 10000k with high CRI,CRI≥93，TLCI≥93.Can display variety color by color mixture by RED,GREEN,BLUE and Warm White with DMX or Manual control.

LED 影视平板灯组合拼装
LED Studio Panel Combination

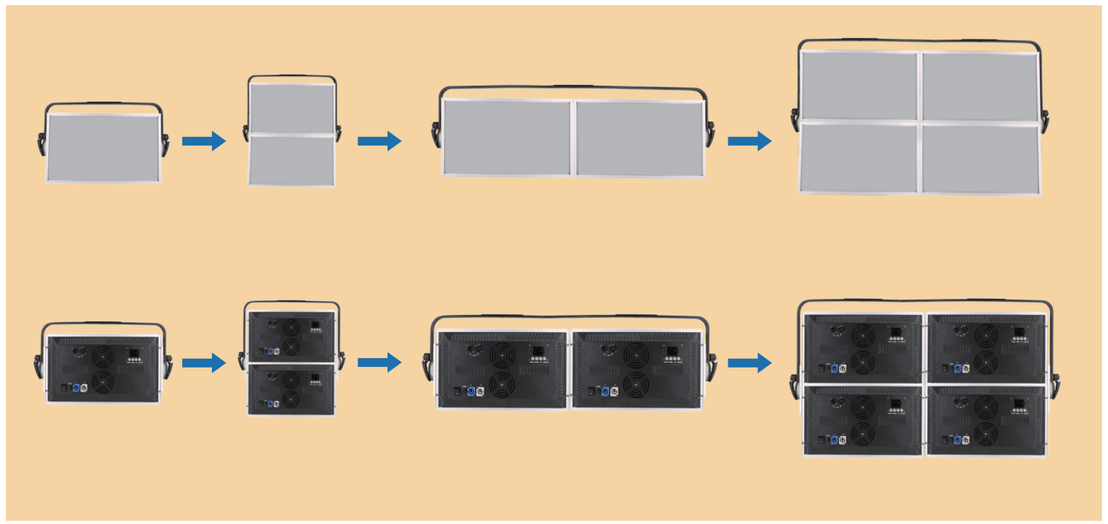

LED 影视平板灯
LED Studio Panel
DD-SP

技术参数


额定电压：AC100-240V/50-60HZ
总 功 率：320W
光源功率：300W
光　　源：欧司朗0.5WLED、红色240颗、绿色240颗、蓝色480颗、暖白480颗
光源寿命：十万小时 （LED life：100000 hr）
色　　温：2700-1000K可调，CRI≥93，TLCI≥93
颜　　色：红、绿、蓝、暖白四种原色，通过控制调节可混合成各种颜色
控制信号：DMX
控制模式：DMX信号控制或手动按键控制
通道模式：2通道、5通道、7通道，3种通道模式可选择
调　　光：16比特以上0-100%无抖动平滑线性调光
环境温度：-25℃~40℃
内 尺 寸：590x356x160mm
包装尺寸：650x400x200mm
净　　重：12kg
毛　　重：13kg

Technical Parameters

Voltage:AC100-240V 50-60hz
Consumption:320W
Light Source:300W
Light Source:Osram 0.5wLED,RED 240units,
Green:240units Blue:480units Warm White:480units.
LED life:100000 hr
Color Temperature:2700-10000K tuneable CRI≥93，TLCI≥93
Can display variety color by color mixture by RED,GREEN,
BLUE and Warm White with DMX or Manual control
Control Signal:DMX
Control Mode: DMX or manual button.
Channel mode:2chs, 5chs,7chs,3 mode choice.
Dimming:0-100% 16BIT smooth flicker-free dimming
Ambient Temperature: -25℃~40℃
Product Size: 590x356x160mm
Package Size: 650x400x200mm
N.W.: 12kg
G.W.: 13kg





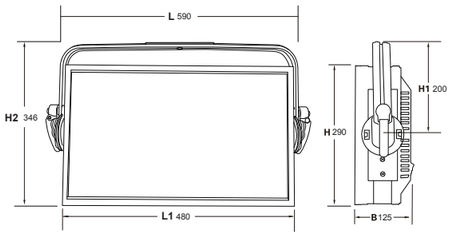



该产品出光品质非常好，光效高、无重影、无眩光、还原度高，CRI≥93，TLCI≥93，色温可在2700K至10000K随意调节，颜色有红、绿、蓝、暖白四种原色，可通过控制调节混合出各种颜色。

This product are of very nice beam effect, high efficiency,no shadow.Color termperature tuneable from 2700K to 10000k with high CRI,CRI≥93，TLCI≥93.Can display variety color by color mixture by RED,GREEN,BLUE and Warm White with DMX or Manual control.