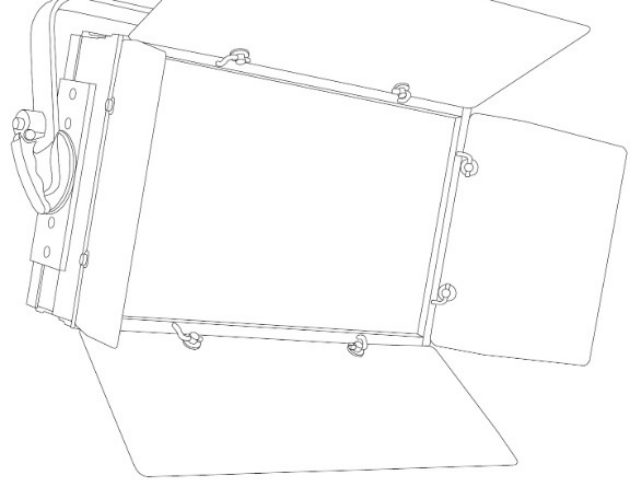


精雕细琢 独具匠新

DunDi®

敦帝灯光

DUNDI LIGHT

广州敦帝舞台设备有限公司

Guangzhou Dundi Stage Equipment Co., Ltd.

LED 影视平板灯
LED Studio Panel

DD-SP2026

LED 影视平板灯特性：


- 光源采用1200颗欧司朗2026（单颗0.5W ）LED光源，由红、绿、蓝、暖白四种颜色灯珠组成，该光源出光效率高，散热好，寿命长，寿命可达到十万小时，光衰少。
- 该产品散热系统是根据该产品的结构特点和光源发热特点特别设计定做的散热铝和风扇，散热好，噪音低，可使产品噪音控制在20dB以下。
- 该产品结构设计独特，可多台组合拼接使用，前面遮光叶和柔光片可随意更换。
- 软件是由国际顶级工程师设计，16比特以上无抖动平滑线性调光，调光频率20K以上。
- 该产品出光品质非常好，光效高、无重影、无眩光、还原度高，CRI≥93，TLCI≥93，色温可在2700K至10000K随意调节，颜色有红、绿、蓝、暖白四种原色，可通过控制调节混合出各种颜色。
- 多台产品同步调光、调色温工作时能使色温和显指的一至性一样不变，产品在工作到不同温度时调光和调色温能使产品的色温和显指一至性一样不变。

LED Studio Panel Features：

- Optical light source using 1200 pcs Osram LEDs model 2026.Color Mixture by RED,GREEN,BLUE AND WARM WHITE.With high luminous efficiency and excellent heat radiator,The life of the LED can last more than 100,000 hours.And the luminous decay are low.
- The radiator system are made of high efficiency ,low noise and special designed according to the structure andheat-sink characters of this product.Which is lower than 20dB.
- The product's constructional design very unique, available connect multi units with each others, the front barndoor changeable as well as the frost filter.
- The software of this product are designed by one of the Top engineer of the industry.16BIT smooth flicker-free dimming,and dimming frequency higher than 20K.
- This product are of very nice beam effect, high efficiency,no shadow.Color termperature tuneable from 2700K to 10000k with high CRI,CRI≥93，TLCI ≥93.Can display variety color by color mixture by RED,GREEN,BLUE and Warm White with DMX or Manual control.
- When multi units diming light or tuning CCT synchronized ,their CCT and CRI keep same . Even when the multi units in different self temperature , they diming or tuning CCT synchronized, their CCT and CRI keep same .

LED 影视平板灯组合拼装

LED Studio Panel Combination

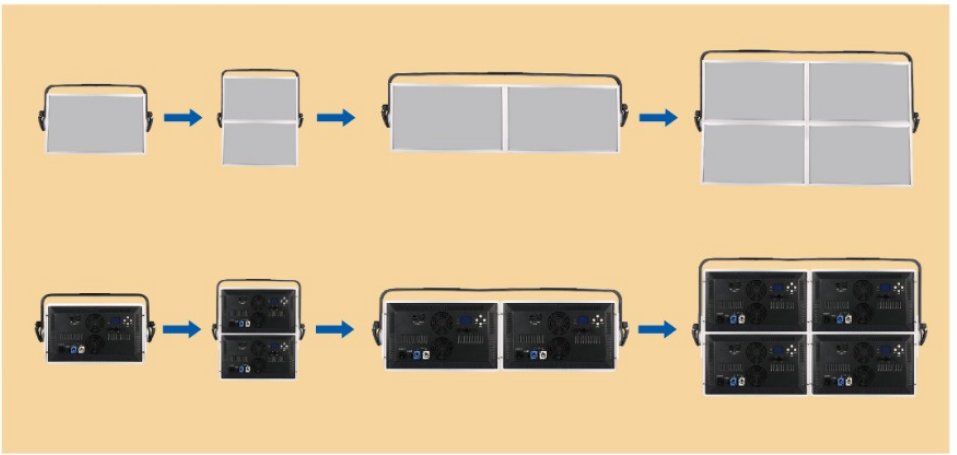

LED 影视平板灯
LED Studio Panel



DD-SP2026


技术参数

额定电压： AC100-240V/50-60HZ
总 功 率： 320W
光源功率： 300W
光　　源： 采用红色240颗、绿色240颗、蓝色240颗、暖白480颗、欧司朗LED光源（单颗0.5W）
光源寿命： 十万小时
色　　温： 2700-10000K可调
显　　指： ≥93，TLCI≥93
颜　　色： 红、绿、蓝、暖白四种原色，通过控制调节可混合成各种颜色
控制信号： DMX
通　　道： 2通道、7通道，2种通道模式可选择
控制模式： DMX信号控制或手动控制
调　　光： 16比特以上无抖动平滑线性调光，调光频率20K以上
工作环境温度： -25℃-40℃
内 尺 寸： 带遮叶590×372×170mm，不带遮叶590×345×136mm
包装尺寸： 640×422×225mm
净　　重： 11.6Kg
毛　　重： 13Kg



Technical Parameters

Voltage: AC100-240V 50-60hz
Consumption: 320W
Light Source: 300W
Light Source: Osram 0.5wLED,RED 240units, Green:240units Blue:240units Warm White:480units.
LED life: 100000 hr
Color Temperature: 2700-10000K tuneable
CRI: ≥93，TLCI≥93
Colour: Can display variety color by color mixture by RED,GREEN, BLUE and Warm White with DMX or Manual control
Control Signal: DMX
Control Mode: DMX or manual button.
Channel mode: 2chs, 7chs,2 mode choice.
Dimming: 16BIT smooth flicker-free dimming ,and dimming frequency higher than 20K.
Ambient Temperature: -25℃~40℃
Product Size: With barndoor 590x372x170mm Without barndoor 590x345x136mm
Package Size: 640x422x225mm
N.W.: 11.6kg
G.W.: 13kg

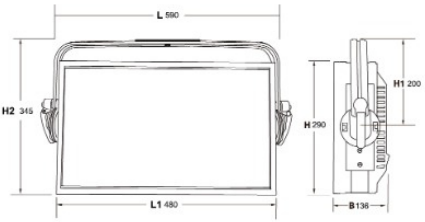

B	H2	H1	H	L1	L
136	345	200	290	480	590



LED 影视平板灯
LED Studio Panel


DD-SP5050

LED 影视平板灯特性：

- 光源采用960颗RGBW 5050 LED光源，该光源出光效率高，散热好，寿命长，寿命可达到十万小时，光衰少。
- 该产品散热系统是根据该产品的结构特点和光源发热特点特别设计定做的散热铝和风扇，散热好，噪音低，可使产品噪音控制在20dB以下。
- 该产品结构设计独特，前面遮光叶和柔光片可随意更换。
- 软件是由国际顶级工程师设计，16比特以上无抖动平滑线性调光，调光频率20K以上。
- 该产品出光品质非常好，光效高、无重影、无眩光、还原度高，CRI≥93，TLCI≥93，色温可在2700K至10000K随意调节，颜色有红、绿、蓝、暖白四种原色，可通过控制调节混合出各种颜色。
- 多台产品同步调光、调色温工作时能使色温和显指的一至性一样不变，产品在工作到不同温度时调光和调色温能使产品的色温和显指一至性一样不变。

LED Studio Panel Features：

- Optical light source using 960 pcs RGBW , model 5050 .Color Mixture by RED,GREEN,BLUE AND WARM WHITE.With high luminous efficiency and excellent heat radiator,The life of the LED can last more than 100,000 hours.And the luminous decay are low.
- The radiator system are made of high efficiency ,low noise and special designed according to the structure and heat-sink characters of this product.Which is lower than 20dB.
- The product's constructional design very unique, the front barndoor changeable as well as the frost filter.
- The software of this product are designed by one of the Top engineer of the industry.16BIT smooth flicker-free dimming,and dimming frequency higher than 20K.
- This product are of very nice beam effect, high efficiency,no shadow.Color termperature tuneable from 2700K to 10000k with high CRI,CRI≥93, TLCI ≥93.Can display variety color by color mixture by RED,GREEN,BLUE and Warm White with DMX or Manual control.
- When multi units diming light or tuning CCT synchronized ,their CCT and CRI keep same . Even when the multi units in different self temperature , they diming or tuning CCT synchronized, their CCT and CRI keep same .

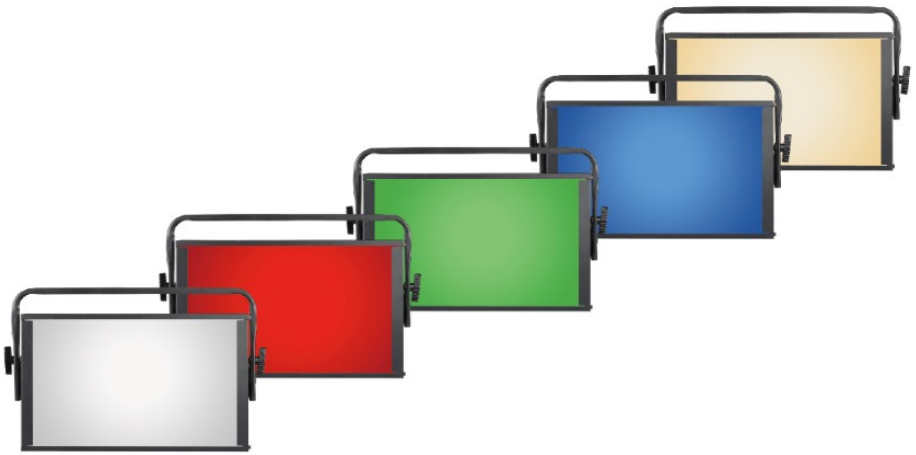

LED 影视平板灯
LED Studio Panel



DD-SP5050

技术参数


额定电压： AC100-240V/50-60HZ
总 功 率： 200W
光源功率： 180W
光　　源： 采用960颗RGBW 5050 LED光源
光源寿命： 十万小时
色　　温： 2700-10000K可调
显　　指： ≥93，TLCI≥93
颜　　色： 红、绿、蓝、暖白四种原色，通过控制调节可混合成各种颜色
控制信号： DMX
通　　道： 2通道、7通道，2种通道模式可选择
控制模式： DMX信号控制或手动控制
调　　光： 16比特以上无抖动平滑线性调光，调光频率20K以上
工作环境温度： -25℃-40℃
内 尺 寸： 带遮叶560×358×146mm，不带遮叶560×343×107mm
包装尺寸： 610×410×200mm
净　　重： 8Kg
毛　　重： 9Kg



Technical Parameters

Voltage: AC100-240V 50-60hz
Consumption: 200W
Light Source: 180W
Light Source: 960 pcs RGBW , model 5050
LED life: 100000 hr
Color Temperature: 2700-10000K tuneable
CRI: ≥93，TLCI≥93
Colour: Can display variety color by color mixture by RED,GREEN,
BLUE and Warm White with DMX or Manual control
Control Signal: DMX
Control Mode: DMX or manual button.
Channel mode: 2chs, 7chs,2 mode choice.
Dimming: 16BIT smooth flicker-free dimming ,and dimming frequency higher than 20K.
Ambient Temperature: -25℃~40℃
Product Size: With barndoor 560×358×146mm
Without barndoor 560×343×107mm
Package Size: 610×410×200mm
N.W.: 8Kg
G.W.: 9Kg



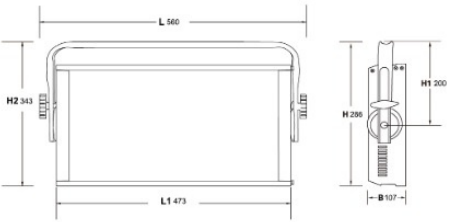

B	H2	H1	H	L1	L
107	343	200	286	473	560

LED 影视平板灯
LED Studio Panel

DD-SP3200 DD-SP5600

LED 影视平板灯特性：

- 光源采用960颗3200k暖白或5600K白光5050 LED光源，该光源出光效率高，散热好，寿命长，寿命可达到十万小时，光衰少。
- 该产品散热系统是根据该产品的结构特点和光源发热特点特别设计定做的散热铝和风扇，散热好，噪音低，可使产品噪音控制在20dB以下。
- 该产品结构设计独特，前面遮光叶和柔光片可随意更换。
- 软件是由国际顶级工程师设计，16比特以上无抖动平滑线性调光，调光频率20K以上。
- 该产品出光品质非常好，光效高、无重影、无眩光、还原度高，CRI≥93，TLCI≥93。
- 多台产品同步调光工作时能使色温和显指的一至性一样不变，产品在工作到不同温度时调光能使产品的色温和显指一至性一样不变。

LED Studio Panel Features:


- Optical light source using 960 pcs 3200K or 5600K , model 5050 .Color Mixture by RED,GREEN,BLUE AND WARM WHITE.With high luminous efficiency and excellent heat radiator,The life of the LED can last more than 100,000 hours.And the luminous decay are low.
- The radiator system are made of high efficiency ,low noise and special designed according to the structure and heat-sink characters of this product.Which is lower than 20dB.
- The product's constructional design very unique, the front barndoor changeable as well as the frost filter.
- The software of this product are designed by one of the Top engineer of the industry.16BIT smooth flicker-free dimming,and dimming frequency higher than 20K.
- This product are of very nice beam effect, high efficiency,no shadow.Color termperature tuneable from 2700K to 10000k with high CRI,CRI≥93，TLCI ≥93.Can display variety color by color mixture by RED,GREEN,BLUE and Warm White with DMX or Manual control.
- When multi units diming light or tuning CCT synchronized ,their CCT and CRI keep same . Even when the multi units in different self temperature , they diming or tuning CCT synchronized, their CCT and CRI keep same .







B	H2	H1	H	L1	L
107	343	200	286	473	560

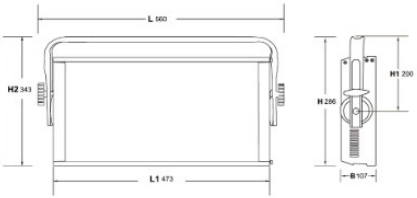

LED 影视平板灯
LED Studio Panel

DD-SP5600

技术参数

额定电压： AC100-240V/50-60HZ
总 功 率： 230W或130W
光源功率： 200W或100W
光　　源： 采用960颗5600K白光5050 LED光源
光源寿命： 十万小时
色　　温： 5600K
显　　指： ≥93，TLCI≥93
控制信号： DMX
通　　道： 2通道
控制模式： DMX信号控制或手动控制
调　　光： 16比特以上无抖动平滑线性调光，调光频率20K以上
工作环境温度： -25℃-40℃
内 尺 寸： 带遮叶560×358×146mm，不带遮叶560×343×107mm
包装尺寸： 610×410×200mm
净　　重： 8Kg
毛　　重： 9Kg

Technical Parameters

Voltage: AC100-240V 50-60hz
Consumption: 230W or 130W
Light Source: 200W or 100W
Light Source: 960 pcs 5600K W , model 5050
LED life: 100000 hr
Color Temperature: 5600K
CRI: ≥93，TLCI≥93
Colour: Can display variety color by color mixture by RED,GREEN, BLUE and Warm White with DMX or Manual control
Control Signal: DMX
Control Mode: DMX or manual button.
Channel mode: 2chs,
Dimming: 16BIT smooth flicker-free dimming , and dimming frequency higher than 20K.
Ambient Temperature: -25℃~40℃
Product Size: With barndoor 560×358×146mm Without barndoor 560×343×107mm
Package Size: 610×410×200mm
N.W.: 8Kg
G.W.: 9Kg

DD-SP3200

技术参数

额定电压： AC100-240V/50-60HZ
总 功 率： 230W或130W
光源功率： 200W或100W
光　　源： 采用960颗3200K暖白光5050 LED光源
光源寿命： 十万小时
色　　温： 3200K
显　　指： ≥93，TLCI≥93
控制信号： DMX
通　　道： 2通道
控制模式： DMX信号控制或手动控制
调　　光： 16比特以上无抖动平滑线性调光，调光频率20K以上
工作环境温度： -25℃-40℃
内 尺 寸： 带遮叶560×358×146mm，不带遮叶560×343×107mm
包装尺寸： 610×410×200mm
净　　重： 8Kg
毛　　重： 9Kg

Technical Parameters

Voltage: AC100-240V 50-60hz
Consumption: 230W or 130W
Light Source: 200W or 100W
Light Source: 960 pcs 3200K , model 5050
LED life: 100000 hr
Color Temperature: 2700-10000K tuneable
CRI: ≥93，TLCI≥93
Colour: Can display variety color by color mixture by RED,GREEN, BLUE and Warm White with DMX or Manual control
Control Signal: DMX
Control Mode: DMX or manual button.
Channel mode: 2chs
Dimming: 16BIT smooth flicker-free dimming , and dimming frequency higher than 20K.
Ambient Temperature: -25℃~40℃
Product Size: With barndoor 560×358×146mm Without barndoor 560×343×107mm
Package Size: 610×410×200mm
N.W.: 8Kg
G.W.: 9Kg

LED 400W 追光灯

DD-FS LED 400W Follow Spot Light

DD-FS

LED 400W 追光灯特性:


- 该产品光学、结构、软件都由国际顶级工程师设计.
- 光源采用科锐LED灯珠，寿命长、光效高.
- 光源散热采用纯铝特殊加工成型的散热器，导热系数是普通铝材2.5倍.
- 整灯操作运行系统采用了30多个轴承和26个齿轮组成。使操作特别顺畅.
- 换色架设计安装在灯体内，色片采用镀膜玻璃。色纯光效高，换色操作采用推杆式设计，操作简便.
- 更换图案片采用手按自动出仓盒方式，非常方便.
- 灯体采用铝合金材料组成，使安装操作轻巧方便.
- 支架采用手摇升降支架，配有锥形轴承.使操作更平稳顺畅.


LED 400W Follow Spot Light Features:


- This product’s optical, construction, software design by international class engineer designers.
- Light source adopt Cree LEDs with durable use life, highly light effective.
- Using pure aluminum special machine-shape radiator for the lamp source, thermal conductivity is 2.5 times of the normal aluminum.
- The whole light operation system is combined by more than thirty pcs bearings and 26 gears , which make the operation very smooth even can be operated by the two sides easily .
- Color stand designed inside, color sheet adopt coating film glass, color pure highly light effect , pusher design on color change, simple operate .
- Hand press auto deliver out gobo box to change gobo, easy operation.
- Light housing is aluminum alloy material combined so that the installation operation lightly and convenient.
- The stand is hand wagged model match with taper shape gear , which make the operation smooth and steady.









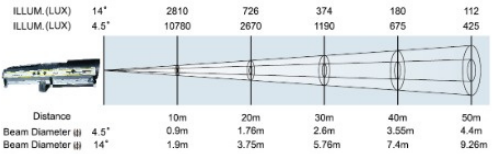

技术参数

额定电压: AC100-240V/50-60HZ
光源: 采用科锐LED灯珠
光源功率: 415W
总功率: 480W
色温: 5600K
显指: ⩾90
调焦范围: 4.5-14°
操作方式: 手动
外型尺寸: 122×35×28cm
净重: 灯具26kg 支架12kg

Technical Parameters

Voltage: AC100-240V/50-60HZ
Light source: Cree LEDs
Lamp power: 415W
Consumption: 480W
Color temperature: 5600K
CRI: ≥90
Zooming scale: 4.5-14°
Operation model: manual
Inner size: 122×35×28cm
Net weight: light : 26kg stand: 12kg

ADD: No.22 South Street Westlake Renhe Town Baiyun District Guangzhou China.
TEL：020-36035818
E-mail：dd@dd-lite.com
www.dd-lite.com