DunDi®

敦帝灯光

DUNDI LIGHT





2011









公司简介

Company profile

GuangZhou DunDi Electric Stage Lighting Equipment Factory is specially engaged in R&D,manufacture,sale,installation,technical consulting and after-sales service of Theatre,Stage and Dancehall lighting equipment.
Our products have been welcomed by the domestic and international since its reliable quality、reasonable price and excellent after-sales service.
We always adhere to the operation philosophy of "Being based on credit","Quality first","Continuous innovation".With precise and professional spirit,we regulate each step.We won the agreement and support of the home and the abroad through its effort and strives for perfection work manner.
Nowadays,DunDi is focused on the design of new products with its unique function and configuration,which lead DunDi into special way in the lighting line.
We eager for customer's inquiry and technical communication,and hope you give us your valuable suggestions.We will,with more modest attitude,more professional view and more perfect service philosphy,meet the demand of each customer.
We will do better!

广州敦帝舞台灯光设备厂是一家专业从事剧院、舞台、舞厅配套灯光设备的研究开发、生产、销售、安装、技术咨询和售后服务于一体的厂家。

本厂产品以可靠的性能、实在的价格、优质的服务,不但在国内市场占有一席之地,还远销国外几十个国家。

我们始终秉承“诚信为本、质量第一、自主创新”的经营理念。以严谨的专业精神，规范每一个细节的运作。经过不懈的努力与精益求精的工作态度，赢得了国内外客户的赞誉和支持。

今后，敦帝还将不断以独特的思想，开发出具有独特功能和外观的新产品，使敦帝在此行业走出独特的一片天。

殷切的期盼新老客户前来咨询和技术交流，并能对我们厂的产品提出你宝贵的意见和建议.我们将以更努力谦虚的态度、更专业的眼光、更完善的服务来配合每一位顾客的需求。

我们会尽量做得更好！

2009法兰克福展



2009上海灯光展





2009北京灯光展



2010广州灯光展



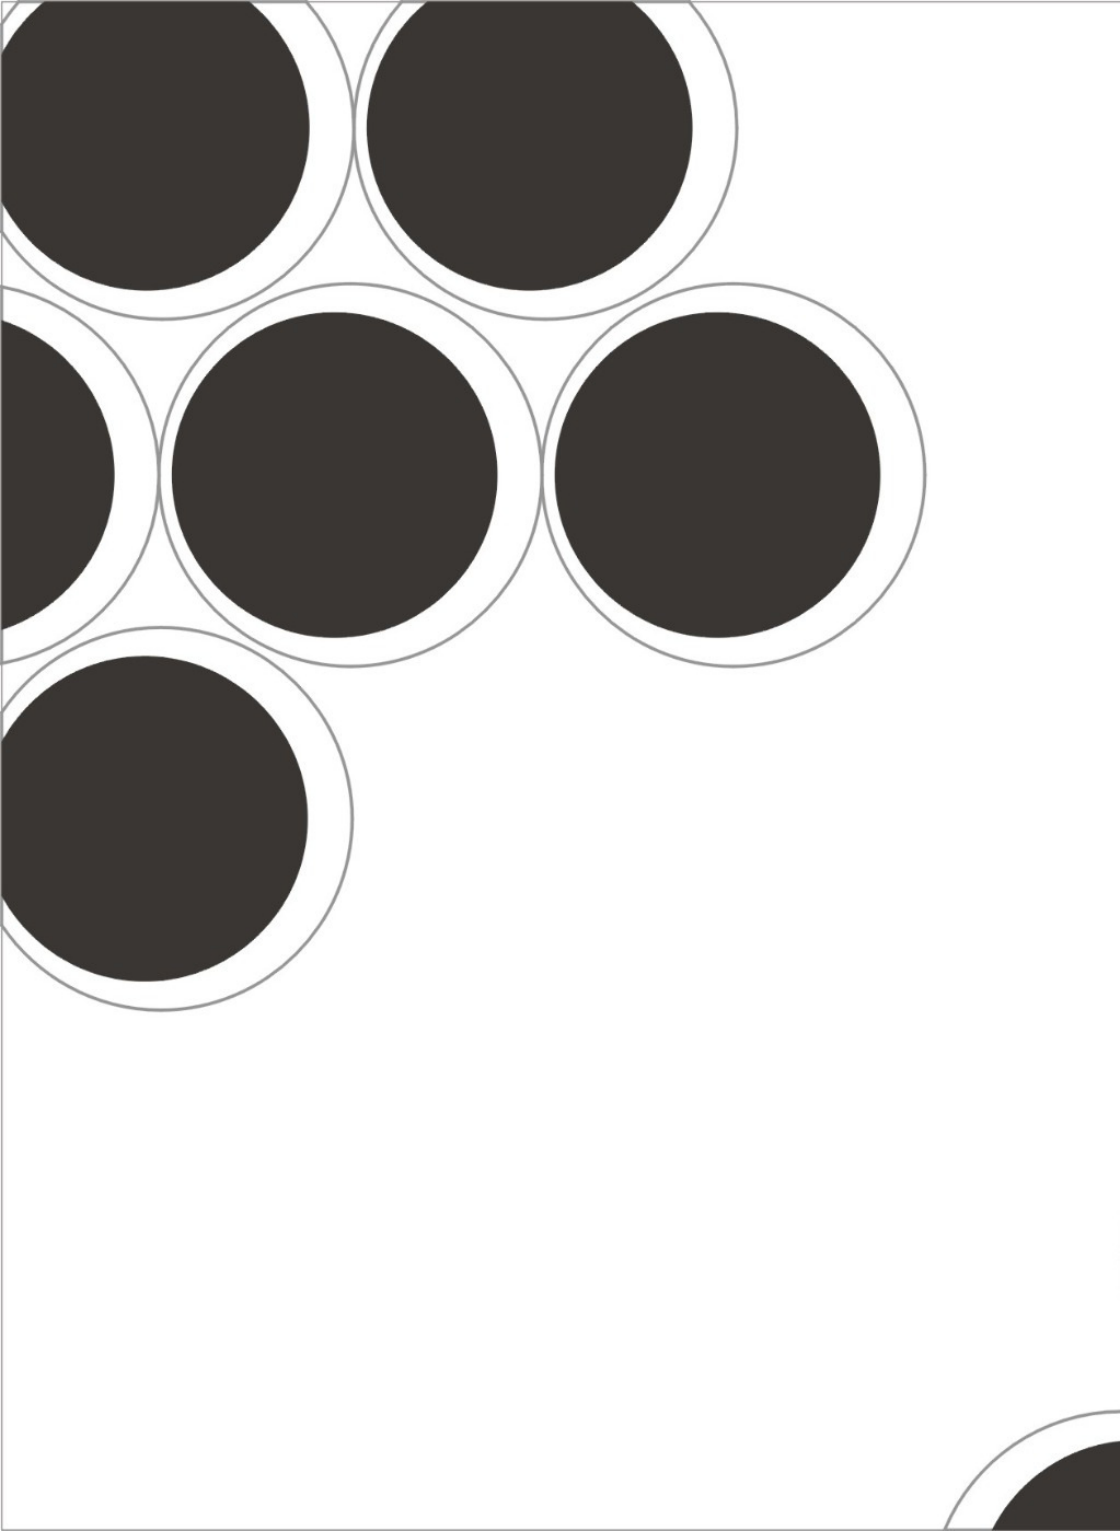


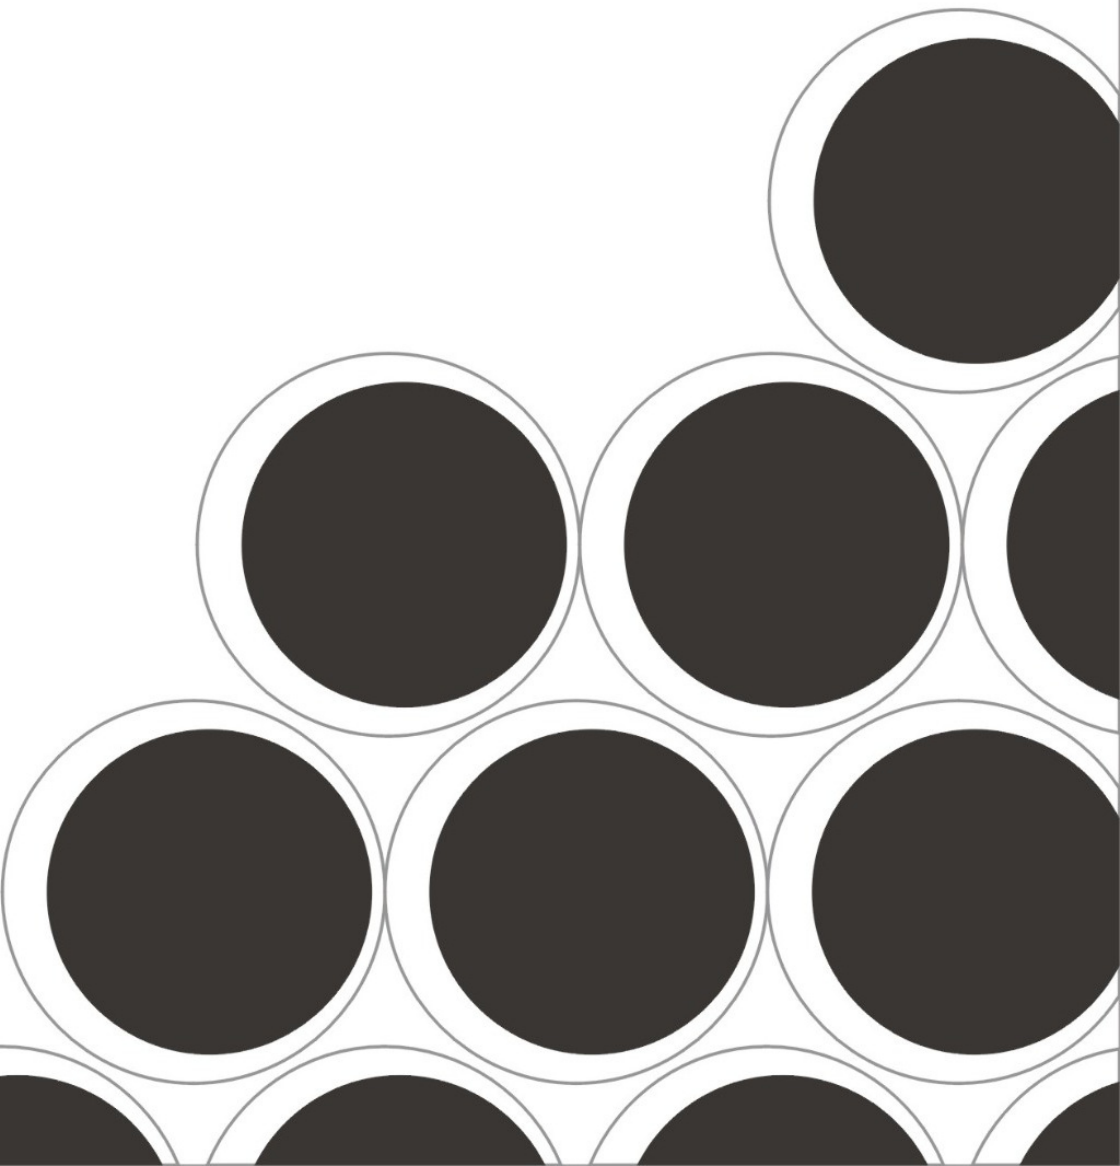


- 冷光变焦成像灯系列是采用国际最新光学技术，使光效更均匀，在舞台上能营造出一种独特的灯光效果。
- 灯体采用铸铝结构。灯具散热效果特佳，使灯体温度降低２０％，增加了灯泡的使用寿命。
- 反光系统采用高效离子镀膜凌面椭球体反光碗及高效非球面透镜，将９５％以上的光源可见光向前反射，８５％以上的红外线及热量向后反射,亮度比普通2000W灯具还亮,射出光的温度比普通灯具低50%,增加了灯泡和换色器色纸使用寿命。
- 灯具独特的结构使镜片和灯泡更换以及产品清洁变得更加容易。灯具后部设计有光源快速交点定位联动机构，为光源准确快速地进入最佳位置提供一个方便快捷的途径。

- Coolbeam Zoom Spotlight series imported latest world optical technique,which produces even illumination,makes you feel in a unique and real scenes on the stage.
- Light body utilizes superior quality aluminum outer casting,excellent heat dissipation,lamp body temperature is 20% lower, therefore,the lamp life is longer.
- The reflection system uses the precise ion plating film reflection bowl and the precise aspherical plano convex lens,which reflects over 95% of the visible source light forward and over 85% of the infrared ray and heats backward. This result is lower bulb temperature and longer service life.The luminosity of which is higher than 2000W ordinary lamp,the temperature of the brightness is 50% lower which is good for the lamp and filter.
- Unique luminaire construction makes the maintenance and cleaning more easy. Adjust the lamp to the best position by focus system fast and effectively.



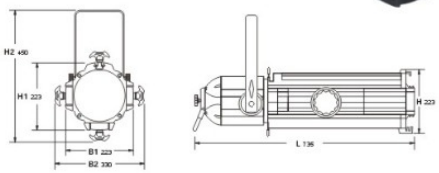



DD-D001 15-30° 变焦成像灯

额定电压:AC220V
光源:HPL575/HPL750
灯座:G9.5
最高表面温度:＜200℃
最高环境温度:＜40℃
最小间隔距离:0.4米
最小照射距离:1.5米
净重:8.5Kg　毛重:10Kg
内尺寸:78×24×24cm
包装尺寸:86×30.5×28cm

DD-D001 15-30° Zoom Spotlight

Voltage: AC220V
Lamp: HPL575/HPL750
Socket: G9.5
Max. Surface Temperature: ＜200℃
Max. Ambient Temperature: ＜40℃
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W: 8.5Kg G.W.10Kg
Outline size: 78×24×24cm
Packing Size:86×30.5×28cm

B1	B2	H1	H2	H	L
223	330	223	450	223	735



在安装或更换光源后有必要进行校位调节。
使用光源前后调节钮,顺时针方向扭动使灯座位置向前移动,逆时针方向扭动使灯座向后,使其在反光碗中的焦点位置,达到最佳光效。

After replacing the lamp it may be necessary to make adjustments.
To adjust the lamp's position in the reflector,turn the Forward Backward Adjusting knob.Turn it clockwise,the socket moves forward;turn it anticlockwise,the socket moves backward.Unlock the ring in the desired direction.

更换(安装)光源

独立的光源装置系统由定位螺丝锁紧,使光源在更换或安装时快速方便。

- 节省拆装时间
- 即使在高空也能方便操作

安全的性能

- 独立的光源装置系统上的安全链连接着灯体

Inserting(replacing)the lamp

Easy to maintain and clean,thanks to Dundi's unique orientedscrews locking system access to the lamp and reflector.

- To save time for assembling and disassembling.
- Be available for operating on high altitude

Safe

- Providing safe cable to connect luminaires


DD-D002 25-50° 变焦成像灯

额定电压:AC220V
光源:HPL575/HPL750
灯座:G9.5
最高表面温度:＜200℃
最高环境温度:＜40℃
最小间隔距离:0.4米
最小照射距离:1.5米
净重: 8Kg　毛重:9.5Kg
内尺寸:67×24×24cm
包装尺寸: 75×30.5×28cm


DD-D002 25-50° Zoom Spotlight

Voltage: AC220V
Lamp: HPL575/HPL750
Socket: G9.5
Max. Surface Temperature: ＜200℃
Max. Ambient Temperature: ＜40℃
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W: 8Kg　G.W: 9.5Kg
Size: 67×24×24cm
Packing Size: 75×30.5×28cm



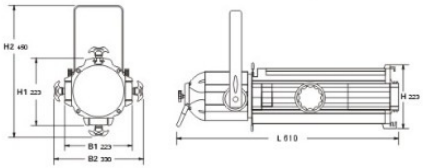


B1	B2	H1	H2	H	L
223	330	223	450	223	610










B1	H1	H2	H	L
405	405	493	405	990

DD-D018 5° 定焦可柔光成像灯

DD-D018 5° Fixed Soft Spotlight


额定电压:AC220V
光源:HPL575/HPL750
灯座:G9.5
最高环境温度:＜200℃
最高表面温度:＜40℃
最小间隔距离:0.4米
最小照射距离:1.5米
净重:8Kg 毛重:10Kg
内尺寸:105×41×41cm
包装尺寸:114×45×45cm

Voltage: AC220V
Lamp: HPL575/HPL750
Socket: G9.5
Max. Ambient Temperature: ＜200℃
Max. Surface Temperature: ＜40℃
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W: 8Kg G.W: 10Kg
Size:105×41×41cm
Packing Size:114×45×45cm

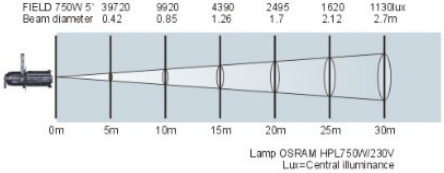

Lamp OSRAM HPL750W/230V
Lux=Central illuminance


Beam 使用光斑效果









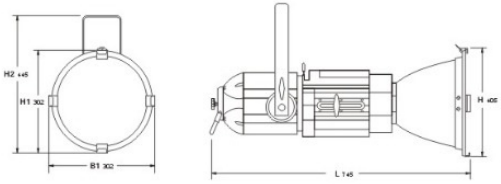


B1	H1	H2	H	L
302	302	445	405	745

DD-D019 10° 定焦可柔光成像灯

DD-D019 10° Fixed Soft Spotlight


额定电压:AC220V
光源:HPL575/HPL750
灯座:G9.5
最高环境温度:＜200℃
最高表面温度:＜40℃
最小间隔距离:0.4米
最小照射距离:1.5米
净重:7.2Kg 毛重:8.9 Kg
内尺寸:81×31×31cm
包装尺寸:90×35×35cm

Voltage: AC220V
Lamp: HPL575/HPL750
Socket: G9.5
Max. Ambient Temperature: ＜200℃
Max. Surface Temperature: ＜40℃
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W: 7.2Kg G.W: 8.9Kg
Size:81×31×31cm
Packing Size:90×35×35cm

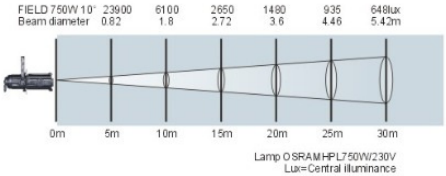


Lamp OSRAM HPL750W/230V
Lux=Central illuminance

Beam 使用光斑效果





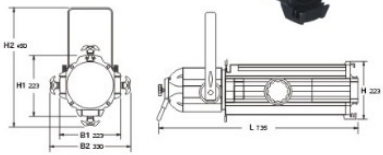


DD-D003 19° 定焦可柔光成像灯


DD-D003 19° Fixed Soft Spotlight

额定电压:AC220V
光源:HPL575/HPL750
灯座:G9.5
最高表面温度:＜200℃
最高环境温度:＜40℃
最小间隔距离:0.4米
最小照射距离:1.5米
净重:7.5kg 毛重:9kg
内尺寸:78×24×24cm
包装尺寸:86×30.5×28cm


Voltage:AC220V
Lamp:HPL575/HPL750
Socket:G9.5
Max. Surface Temperature:＜200℃
Max. Ambient Temperature:＜40℃
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W.7.5kg G.W.9kg
Size:78×24×24cm
Packing Size:86×30.5×28cm

B1	B2	H1	H2	H	L
223	330	223	450	223	735







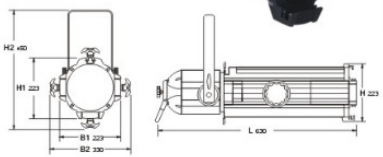


DD-D004 26° 定焦可柔光成像灯


DD-D004 26° Fixed Soft Spotlight

额定电压:AC220V
光源:HPL575/HPL750
灯座:G9.5
最高表面温度:＜200℃
最高环境温度:＜40℃
最小间隔距离:0.4米
最小照射距离:1.5米
净重:7kg 毛重:8.5kg
内尺寸:68×24×24cm
包装尺寸:76×30.5×28cm

Voltage:AC220V
Lamp:HPL575/HPL750
Socket:G9.5
Max. Surface Temperature:＜200℃
Max. Ambient Temperature:＜40℃
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W.7kg G.W.8.5kg
Size:68×24×24cm
Packing Size:76×30.5×28cm

B1	B2	H1	H2	H	L
223	330	223	450	223	630






DD-D005 36° 定焦可柔光成像灯

DD-D005 36° Fixed Soft Spotlight


额定电压:AC220V
光源:HPL575/HPL750
灯座:G9.5
最高表面温度:＜200℃
最高环境温度:＜40℃
最小间隔距离:0.4米
最小照射距离:1.5米
净重:6.6kg 毛重:8.1kg
内尺寸:62.5×22×22cm
包装尺寸:71×30.5×28cm


Voltage: AC220V
Lamp: HPL575/HPL750
Socket: G9.5
Max. Surface Temperature: ＜200℃
Max. Ambient Temperature: ＜40℃
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W: 6.6kg G.W: 8.1kg
Size: 62.5×22×22cm
Packing Size: 71×30.5×28cm



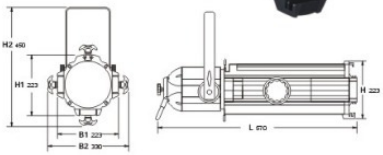

B1	B2	H1	H2	H	L
223	330	223	450	223	570






DD-D006 50° 定焦可柔光成像灯

DD-D006 50° Fixed Soft Spotlight


额定电压:AC220V
光源:HPL575/HPL750
灯座:G9.5
最高表面温度:＜200℃
最高环境温度:＜40℃
最小间隔距离:0.4米
最小照射距离:1.5米
净重:6.6kg 毛重:8.1kg
内尺寸:62.5×22×22cm
包装尺寸:63.8×30.5×28cm


Voltage: AC220V
Lamp: HPL575/HPL750
Socket: G9.5
Max. Surface Temperature: ＜200℃
Max. Ambient Temperature: ＜40℃
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W: 6.6kg G.W: 8.1kg
Size: 62.5×22×22cm
Packing Size: 63.8×30.5×28cm



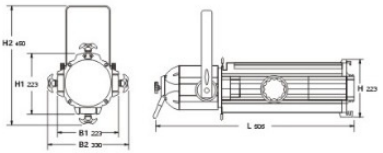

B1	B2	H1	H2	H	L
223	330	223	450	223	520









Ceramic Metal Halide Profile Lighting Series
陶瓷金卤成像灯系列

- 陶瓷金卤成像灯系列是采用国际最新光学技术，使光效更均匀，在舞台上能营造出一种独特的灯光效果。
- 采用气体冷光源,照度是一般HPL750W成像灯的3-4倍,温度比一般HPL750W成像灯还低,因此,使用此产品大量节约了电源。
- 灯体采用铸铝结构。灯具散热效果特佳，使灯体温度降低20%，增加了灯泡的使用寿命。
- 反光系统采用高效离子镀膜凌面椭球体反光碗及高效非球面透镜，将95%以上的光源可见光向前反射，85%以上的红外线及热量向后反射，亮度比普通2000W灯具还亮，射出光的温度比普通灯具低50%，增加了灯泡和换色器色纸使用寿命。
- 灯具独特的结构使镜片和灯泡更换以及产品清洁变得更加容易。灯具后部设计有光源快速交点定位联动机构，为光源准确快速地进入最佳位置提供一个方便快捷的途径。

- Ceramic Metal Halide Profile Lighting series imported latest world optical technique,which produces even illumination,makes you feel in a unique and real scenes on the stage.
- Discharge lamp improves the illuminance 3 to 4 times and save energy.The temperature is also lower than HPL750 lamp.
- Light body utilizes superior quality aluminum outer casting,excellent heat dissipation,lamp body temperature is 20% lower,therefore,the lamp life is longer.
- The reflection system uses the precise ion plating film reflection bowl and the precise aspherical plano convex lens,which reflects over 95% of the visible source light forward and over 85% of the infrared ray and heats backward. This result is lower bulb temperature and longer service life.The luminosity of which is higher than 2000W ordinary lamp,the temperature of the brightness is 50% lower which is good at the lamp and filter.
- Unique luminaire construction makes the maintenance and cleaning more easy. Adjust the lamp to the best position by focus system fast and effectively.



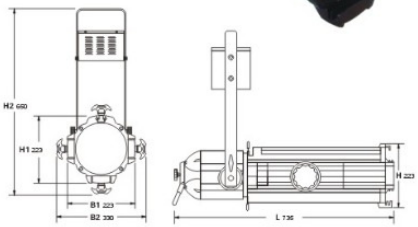



DD-D016 15-30° 金卤成像灯

额定电压:AC 220V
光源:MSD575W/250W CDS575W/250W
灯座:GY9.5
最高环境温度:＜175℃
最高表面温度:＜40℃
最小间隔距离:0.4米
最小照射距离:1.5米
净重: 15.2Kg　毛重: 17.5Kg
内尺寸:97×24×24cm
包装尺寸:105×30.5×28cm

DD-D016 15-30° Metal Halide Profile Lighting

Voltage: AC220V
Lamp: MSD575W/250W CDS575W/250W
Socket: GY9.5
Max. Ambient Temperature: ＜175℃
Max. Surface Temperature: ＜40℃
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W: 15.2Kg　G.W: 17.5Kg
Outline size:97×24×24cm
Packing Size:105×30.5×28cm

B1	B2	H1	H2	H	L
223	330	223	650	223	735

Beam使用光斑效果



在安装或更换光源后有必要进行校位调节。
使用光源前后调节钮，顺时针方向扭动使灯座位置向前移动，逆时针方向扭动使灯座向后，使其在反光碗中的焦点位置，达到最佳光效。

After replacing the lamp it may be necessary to make adjustments.
To adjust the lamp's position in the reflector,turn the Forward Backward Adjusting knob.Turn it clockwise,the socket moves forward;turn it anticlockwise,the socket moves backward.Unlock the ring in the desired direction.

更换(安装)光源

独立的光源装置系统由两个定位螺丝锁紧,使光源在更换或安装时快速方便.

- 节省拆装时间
- 即使在高空也能方便操作

安全的性能

- 独立的光源装置系统上的安全链连接着灯体

Inserting(replacing)the lamp


Easy to maintain and clean,thanks to Dundi's unique two orientedscrews locking system access to the lamp and reflector.


- To save time for assembling and disassembling.
- Be available for operating on high altitude

Safe

- Providing safe cable to connect luminaires







DD-D017 25-50° 陶瓷金卤成像灯

额定电压:AC220V
光源:CDM 150W/LMH150W
灯座:G12
最高环境温度:＜60℃
最高表面温度:＜40℃
最小间隔距离:0.4米
最小照射距离:1.5米
净重:9.5Kg 毛重:11.3Kg
内尺寸:70×37×24cm
包装尺寸:91×30.5×28cm


DD-D017 25-50° Ceramic Metal Halide Profile Lighting

Voltage: AC220V
Lamp: CDM 150W/LMH150W
Socket: G12
Max. Ambient Temperature: <60℃
Max. Surface Temperature: <40℃
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W:9.5 Kg G.W: 11.3Kg
Size:70×37×24cm
Packing Size:91×30.5×28cm

该系列产品有:

5°	10°	19°	26°	36°	15-30°	25-50°

B1	B2	H1	H2	H	L
223	370	223	480	223	610







灯体外壳采用精致的铝合金压铸工艺，散热效果极佳。光束角度可在于25°—43°之间随意调节，达到不同角度效果。采用气体冷光源,照度是一般HPL750W成像灯的3—4倍,温度比一般HPL750W成像灯还低，因此,使用此产品大量节约了电源。
反光碗采用高效离子镀膜凌面椭球体反光碗,射出的光比同类产品的温度降低40%，使灯泡寿命延长。其亮度也比同类产品亮30%,后面带有齿轮组合，调整灯座前后，可使光源与反光碗平行，前后进行调整焦点，使光斑更加均匀。

Light body utilizes superior quality aluminum outer casting,excellent heat dissipation.Beam angle range from 25° to 43° adjustable. Discharge lamp improves the illuminance 3 to 4 times and save energy.The temperature is also lower than HPL750 lamp.Reflection system uses the precise ion plating film reflection bowl and the precise aspherical plano convex lens.The temperature of brightness is 40% lower compare with the familiar power ordinary lamp,longer the lamp life,it has duplex gear at the back of the lamp.To adjust the lamp's position in the reflector, turn the Forward Backward Adjusting knob.Moving the ring in the desired direction to get better effect.



CE





B1	B2	H1	H2	H	L
225	310	225	510	225	325


DD-D020 座式金卤变焦聚光灯

DD-D020 Floor Metal Coolbeam Zooming and Imaging Spotlight


额定电压:AC220V
光源: MSD575W/250W
灯座: GY9.5
最高环境温度: < 175℃
最高表面温度: < 40℃
最小间隔距离:0.4米
最小照射距离:1.5米
净重: 11Kg 毛重: 12.8Kg
内尺寸:54×31×23cm
包装尺寸:60×37×29cm

Voltage: AC220V
Lamp: MSD575W/250W
Socket: GY9.5
Max. Ambient Temperature: ＜175℃
Max. Surface Temperature: ＜40℃
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W: 11Kg G.W: 12.8Kg
Outline size:54×31×23cm
Packing Size:60×37×29cm

该系列产品可更换以下不同光效镜片　Four Different Effect lens

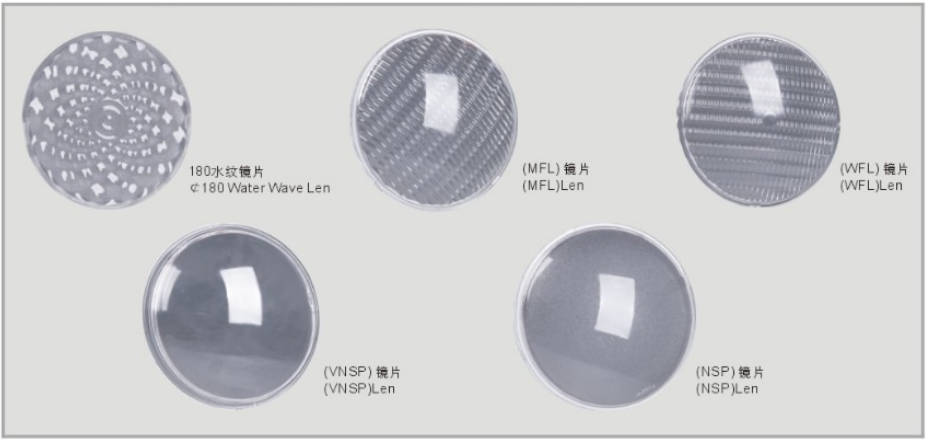



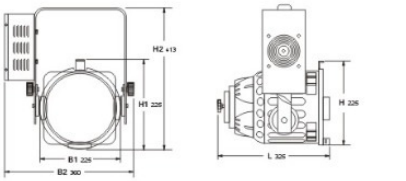

B1	B2	H1	H2	H	L
225	360	225	413	225	325

DD-D022　陶瓷金卤变焦聚光灯

DD-D022　Ceramic Metal Coolbeam Zooming and Imaging Spotlight

额定电压:AC220V	Voltage: AC220V
光源:CDM150W	Lamp: CDM150W
灯座:G12	Socket: G12
最高环境温度:＜60℃	Max. Ambient Temperature: ＜60℃
最高表面温度:＜40℃	Max. Surface Temperature: ＜40℃
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重: 6Kg　毛重:7.5 Kg	N.W: 6Kg　G.W: 7.5Kg
内尺寸:44.5×36×23cm	Outline size:44.5×36×23cm
包装尺寸:65×30×29cm	Packing Size:65×30×29cm


灯体外壳采用精致的铝合金压铸工艺,散热效果极佳.光束角度可在 25° -43° 之间随意调节,达到不同角度效果.反光碗采用高效离子镀膜凌面椭球体反光碗,射出的光比同类产品的温度降低40%,使灯泡寿命延长。其亮度也比同类产品亮30%,后面带有齿轮组合调整灯座前后移动,可使光源与反光碗平行前后进行调整焦点,使光斑更加均匀。


Light body utilizes superior quality aluminum outer casting,excellent heat dissipation.Beam angle range from 25° to 43° adjustable.Reflection system uses the precise ion plating film reflection bowl and the precise aspherical plano convex lens. The temperature of brightness is 40% lower compare with the familiar power ordinary lamp,longer the lamp life,it has duplex gear at the back of the lamp to adjust the lamp's position in the reflector,turn the Forward Backward Adjusting knob,moving the ring in the desired direction to get better effect.












B1	B2	H1	H2	H	L
225	290	225	353	225	325

FIELD 750W 冷光变焦聚光灯

750W/25°	2815	1827	1064	847 Lux
Beam diameter	2.05	2.68	3.42	4.05m
750W/43°	1462	885	578	455 Lux
Beam diameter	3.62	5.6	7.08	8.42m



Lamp OSRAM HPL750W/230V
Lux=Central illuminance

DD-D007 冷光变焦聚光灯

DD-D007 Coolbeam Zooming and Imaging Spotlight

额定电压:AC220V	Voltage: AC220V
光源:HPL575/HPL750	Lamp: HPL575/HPL750
灯座:G9.5	Socket: G9.5
最高表面温度:＜200℃	Max. Surface Temperature: ＜200℃
最高环境温度:＜40℃	Max. Ambient Temperature: ＜40℃
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:4Kg 毛重:5Kg	N.W: 4Kg G.W: 5Kg
内尺寸: 24×23×38.5cm	Size: 24×23×38.5cm
包装尺寸: 25×24×40cm	Packing Size: 25×24×40cm

DD-D008 冷光(MFL)聚光灯

DD-D008 Coolbeam(MFL) Imaging Spotlight

额定电压:AC220V	voltage: AC220V
光源:HPL575/HPL750	Lamp: HPL575/HPL750
灯座:G9.5	Socket: G9.5
最高表面温度:＜200℃	Max. Surface Temperature: ＜200℃
最高环境温度:＜40℃	Max. Ambient Temperature: ＜40℃
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:4Kg　毛重:5Kg	N.W: 4Kg　G.W: 5Kg
内尺寸: 24×23×38.5cm	Size: 24×23×38.5cm
包装尺寸: 25×24×40cm	Packing Size: 25×24×40cm



DD-D009 冷光(WFL)聚光灯

DD-D009 Coolbeam(WFL) Imaging Spotlight

额定电压:AC220V	voltage: AC220V
光源:HPL575/HPL750	Lamp: HPL575/HPL750
灯座:G9.5	Socket: G9.5
最高表面温度:＜200℃	Max. Surface Temperature: ＜200℃
最高环境温度:＜40℃	Max. Ambient Temperature: ＜40℃
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:4Kg　毛重:5Kg	N.W: 4Kg　G.W: 5Kg
内尺寸: 24×23×38.5cm	Size: 24×23×38.5cm
包装尺寸: 25×24×40cm	Packing Size: 25×24×40cm



DD-D010 冷光(NSP)聚光灯

DD-D010 Coolbeam(NSP) Imaging Spotlight

额定电压:AC220V	voltage: AC220V
光源:HPL575/HPL750	Lamp: HPL575/HPL750
灯座:G9.5	Socket: G9.5
最高表面温度:＜200℃	Max. Surface Temperature: ＜200℃
最高环境温度:＜40℃	Max. Ambient Temperature: ＜40℃
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:4Kg　毛重:5Kg	N.W: 4Kg　G.W: 5Kg
内尺寸: 24×23×38.5cm	Size: 24×23×38.5cm
包装尺寸: 25×24×40cm	Packing Size: 25×24×40cm



DD-D011 冷光(VNSP)聚光灯

DD-D011 Coolbeam(VNSP) Imaging Spotlight

额定电压:AC220V	voltage: AC220V
光源:HPL575/HPL750	Lamp: HPL575/HPL750
灯座:G9.5	Socket: G9.5
最高表面温度:＜200℃	Max. Surface Temperature: ＜200℃
最高环境温度:＜40℃	Max. Ambient Temperature: ＜40℃
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:4Kg　毛重:5Kg	N.W: 4Kg　G.W: 5Kg
内尺寸: 24×23×38.5cm	Size: 24×23×38.5cm
包装尺寸: 25×24×40cm	Packing Size: 25×24×40cm




灯体采用铝合金组成,散热效果好。反光碗采用透红外耐高温介质膜冷光束反光碗,射出的光比一般筒灯温度降低50%。温度低可使灯泡和换色器色纸寿命更长。575W比一般1000W筒灯亮度还亮.后面带有齿轮组合调整灯座前后移动,可使光源与反光碗平行前后进行调整焦点,使光斑更均匀。


Light body utilizes superior quality aluminum outer casting,excellent heat dissipation.,use infrared,unti-high temperature, coolbeam reflector. The temperature of brightness is 50% lower compare with the familiar power par cans,longer the lamp and filter life.575W's brightness is higher than ordinary par cans with 1000W.it has duplex gear at the back of the lamp to adjust the lamp's position in the reflector,turn the Forward Backward Adjusting knob,moving the ring in the desired direction to get better effect.











B1	B2	H1	H2	H	L
255	270	255	348	255	315

DD-D012 冷光(MFL)筒灯

DD-D012 Coolbeam(MFL)Par Cans

额定电压:AC220V
光源:HPL575/HPL750
灯座:G9.5
5米照度:1500LUX
10O米照度:6800LUX
色温:4200K
最高表面温度:＜200℃
最高环境温度:＜40℃
最小间隔距离:0.4米
最小照射距离:1.5米
净重:3.2Kg 毛重:4.2Kg
内尺寸:22.5×22×36.5cm
包装尺寸:23.5×23×38cm

Voltage: AC220V
Lamp: HPL575/HPL750
Socket: G9.5
5 meter illumination:1500lux
10 meter illumination:6800lux
Temperature:4200K
Max. Surface Temperature: ＜200℃
Max. Ambient Temperature: ＜40℃
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W: 3.2Kg G.W: 4.2Kg
Size: 22.5×22×36.5cm
Packing Size: 23.5×23×38cm

DD-D013 冷光(WFL)筒灯

DD-D013 Coolbeam(WFL)Par Cans



额定电压:AC220V	Voltage: AC220V
光源:HPL575/HPL750	Lamp: HPL575/HPL750
灯座:G9.5	Socket: G9.5
5米照度:1500LUX	5 meter illumination:1500lux
10O米照度:6800LUX	10 meter illumination:6800lux
色温:4200K	Temperature:4200K
最高表面温度:＜200℃	Max. Surface Temperature: ＜200℃
最高环境温度:＜40℃	Max. Ambient Temperature: ＜40℃
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:3.2Kg 毛重:4.2Kg	N.W: 3.2Kg G.W: 4.2Kg
内尺寸: 22.5×22×36.5cm	Size: 22.5×22×36.5cm
包装尺寸:23.5×23×38cm	Packing Size: 23.5×23×38cm

DD-D014 冷光(NSP)筒灯

DD-D014 Coolbeam(NSP)Par Cans




额定电压:AC220V	Voltage: AC220V
光源:HPL575/HPL750	Lamp: HPL575/HPL750
灯座:G9.5	Socket: G9.5
5米照度:1500LUX	5 meter illumination:1500lux
10O米照度:6800LUX	10 meter illumination:6800lux
色温:4200K	Temperature:4200K
最高表面温度:＜200℃	Max. Surface Temperature: ＜200℃
最高环境温度:＜40℃	Max. Ambient Temperature: ＜40℃
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:3.2Kg 毛重:4.2Kg	N.W: 3.2Kg G.W: 4.2Kg
内尺寸: 22.5×22×36.5cm	Size: 22.5×22×36.5cm
包装尺寸:23.5×23×38cm	Packing Size: 23.5×23×38cm

DD-D015 冷光(VNSP)筒灯

DD-D015 Coolbeam(VNSP)Par Cans



额定电压:AC220V	Voltage: AC220V
光源:HPL575/HPL750	Lamp: HPL575/HPL750
灯座:G9.5	Socket: G9.5
5米照度:1500LUX	5 meter illumination:1500lux
10O米照度:6800LUX	10 meter illumination:6800lux
色温:4200K	Temperature:4200K
最高表面温度:＜200℃	Max. Surface Temperature: ＜200℃
最高环境温度:＜40℃	Max. Ambient Temperature: ＜40℃
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:3.2Kg 毛重:4.2Kg	N.W: 3.2Kg G.W: 4.2Kg
内尺寸: 22.5×22×36.5cm	Size: 22.5×22×36.5cm
包装尺寸:23.5×23×38cm	Packing Size: 23.5×23×38cm

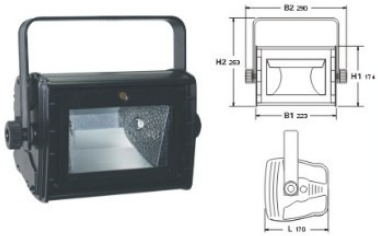


DD-D025 500泛光灯

DD-D025 500 floodlight

额定电压：220V/110V
光源：500W/800W双端卤钨灯管
灯座：R7S
最高表面温度：<180℃
最高环境温度：<40℃
最小间隔距离：0.4米
最小照射距离：0.4米
色温：3200K
净重：2.3kg 毛重：3kg
内尺寸：29.5×17×25cm
包装尺寸：30.5×18×26.5cm

Voltage: 220V/110V
Lamp:500W/800W double-end halogen tungsten tube
Socket:R7S
Max surface temperature: <180℃
Max ambient temperature: <40℃
Min safe interval:0.4m
Min throw distance:0.4m
Color temperature:3200k
Net weight:2.3kg Gross weight:3kg
Size: 29.5×17×25cm
Packing size: 30.5×18×26.5cm

B1	B2	H1	H2	L
223	290	174	253	170

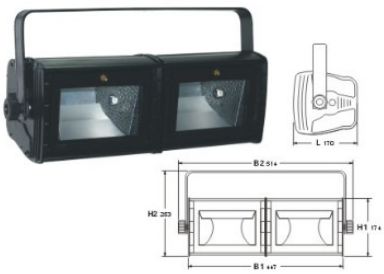


DD-D026 500×2泛光灯

DD-D026 500×2 floodlight

额定电压：220V/110V
光源：500W/800W双端卤钨灯管
灯座：R7S
最高表面温度：<180℃
最高环境温度：<40℃
最小间隔距离：0.4米
最小照射距离：0.4米
色温：3200K
净重：4.6kg 毛重：6kg
内尺寸：53×17×25cm
包装尺寸：(30.5×18×26.5cm)×2

Voltage: 220V/110V
Lamp:500W/800W double-end halogen tungsten tube
Socket:R7S
Max surface temperature: <180℃
Max ambient temperature: <40℃
Min safe interval:0.4m
Min throw distance:0.4m
Color temperature:3200k
Net weight:4.6 Gross weight:6kg
Size: 53×17×25cm
Packing size: (30.5×18×26.5cm)×2

B1	B2	H1	H2	L
447	514	174	253	170

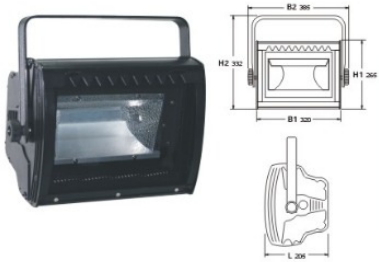


DD-D027 1250泛光灯

DD-D027 1250 floodlight

额定电压：220V/110V
光源：1250W双端卤钨灯管
灯座：R7S
最高表面温度：<180℃
最高环境温度：<40℃
最小间隔距离：0.4米
最小照射距离：0.4米
色温：3200K
净重：4.3kg 毛重：5kg
内尺寸：38.5×20.5×33.5cm
包装尺寸：39.5×21.5×35cm

Voltage: 220V/110V
Lamp: 1250W double-end halogen tungsten tube
Socket:R7S
Max surface temperature: <180℃
Max ambient temperature: <40℃
Min safe interval:0.4m
Min throw distance:0.4m
Color temperature:3200k
Net weight: 4.3kg Gross weight: 5kg
Size: 38.5×20.5×33.5cm
Packing size: 39.5×21.5×35cm

B1	B2	H1	H2	L
320	385	265	332	205

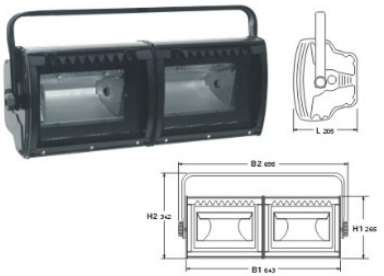

DD-D028 1250×2泛光灯

DD-D028 1250×2 floodlight

额定电压：220V/110V
光源：1250W双端卤钨灯管
灯座：R7S
最高表面温度：<180℃
最高环境温度：<40℃
最小间隔距离：0.4米
最小照射距离：0.4米
色温：3200K
净重：8.6kg 毛重：10kg
内尺寸：71×20.5×33.5cm
包装尺寸：(39.5×21.5×35cm)×2

Voltage: 220V/110V
Lamp: 1250W double-end halogen tungsten tube
Socket:R7S
Max surface temperature: <180℃
Max ambient temperature: <40℃
Min safe interval:0.4m
Min throw distance:0.4m
Color temperature:3200k
Net weight: 8.6 kg Gross weight: 10kg
Size: 71×20.5×33.5cm
Packing size: (39.5×21.5×35cm)×2

B1	B2	H1	H2	L
643	695	265	342	205


DD-D029　1250×4泛光灯

DD-D029　1250×4floodlight

额定电压：220V/110V
光源：1250W双端卤钨灯管
灯座：R7S
最高表面温度：＜180℃
最高环境温度：＜40℃
最小间隔距离：0.4米
最小照射距离：0.4米
色温：3200K
净重：17kg　毛重：19.8kg
内尺寸：73×20.5×62.5cm
包装尺寸：(39.5×21.5×35cm)×4

Voltage: 220V/110V
Lamp: 1250W double-end halogen tungsten tube
Socket:R7S
Max surface temperature: ＜180℃
Max ambient temperature: ＜40℃
Min safe interval:0.4m
Min throw distance:0.4m
Color temperature:3200k
Net weight:17kg Gross weight:19.8kg
Size: 73×20.5×62.5cm
Packing size: (39.5×21.5×35cm)×4

B1	B2	H1	H2	L
643	732	549	636	170

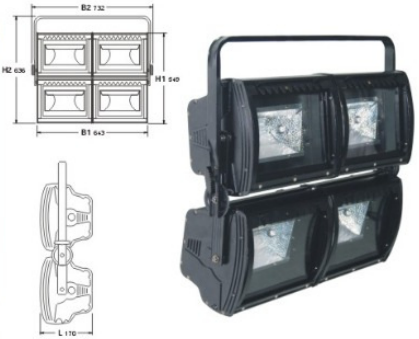


DD-D030　500×4脚光灯

DD-D030　500×4 floodlight

额定电压：220V/110V
光源：500W/800W双端卤钨灯管
灯座：R7S
最高表面温度：＜180℃
最高环境温度：＜40℃
最小间隔距离：0.4米
最小照射距离：0.4米
色温：3200K
净重：9.2kg　毛重：12kg
内尺寸：99×17×26cm
包装尺寸：(30.5×18×26.5cm)×4

Voltage: 220V/110V
Lamp: 500W/800W double-end halogen tungsten tube
Socket:R7S
Max surface temperature: ＜180℃
Max ambient temperature: ＜40℃
Min safe interval:0.4m
Min throw distance:0.4m
Color temperature:3200k
Net weight: 9.2kg Gross weight:12kg
Size: 99×17×26cm
Packing size: (30.5×18×26.5cm)×4

B1	B2	H1	H2	L1	L2
1280	1340	265	306	200	205

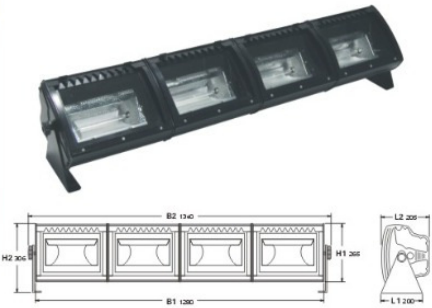


DD-D031　1250×4脚光灯

DD-D031　1250×4 floodlight


额定电压：220V/110V
光源：1250W双端卤钨灯管
灯座：R7S
最高表面温度：＜180℃
最高环境温度：＜40℃
最小间隔距离：0.4米
最小照射距离：0.4米
色温：3200K
净重：17kg　毛重：20kg
内尺寸：134×20.5×30cm
包装尺寸：(39.5×21.5×35cm)×4

Voltage: 220V/110V
Lamp: 1250W double-end halogen tungsten tube
Socket:R7S
Max surface temperature: ＜180℃
Max ambient temperature: ＜40℃
Min safe interval:0.4m
Min throw distance:0.4m
Color temperature:3200k
Net weight: 17kg Gross weight:20kg
Size: 134×20.5×30cm
Packing size: (39.5×21.5×35cm)×4

B1	B2	H1	H2	L1	L2
895	950	174	255	200	170

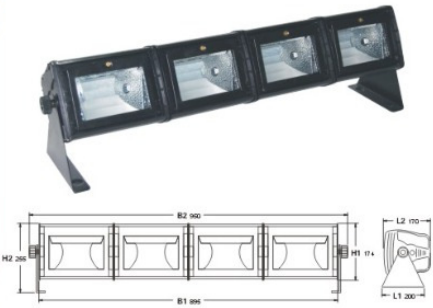





B	H1	H	L1	L
180	380	450	420	350


DD-A011 双反射天排柔光灯

DD-A011 Double Reflection Sky Row Soft Light

电压: 220V
频率: 50-60Hz
功率: 2000W
灯泡: 220V1000W / 220V1250W
220V2000W
色温: 3200K
包装尺寸: 46×43×19.5cm
净重: 6Kg 毛重: 6.8Kg

Voltage:220V
Frequency:50-60Hz
Power consumption:2000W
Bulb: 220V1000W / 220V1250W
220V2000W
Color temperature:3200K
Packing Size:46×43×19.5cm
N.W. 6Kg G.W. 6.8Kg





B	H1	H	L1	L
290	380	415	420	370


DD-A013 双反射地排柔光灯

DD-A013 Double Reflection Land Row Soft Light

电压: 220V
频率: 50-60Hz
功率: 2000W
灯泡: 220V1000W / 220V1250W
220V2000W
色温: 3200K
包装尺寸: 46×43×19.5mm
净重: 6Kg 毛重: 6.8Kg

Voltage:220V
Frequency:50-60Hz
Power consumption:2000W
Bulb: 220V1000W / 220V1250W
220V2000W
Color temperature:3200K
Packing Size:46×43×19.5cm
N.W. 6Kg G.W. 6.8Kg





B	H1	H	L1	L
250	280	375	502	462


DD-A007 带风机天排灯

DD-A007 Sky Row Light With Fun

电压: 220V
频率: 50-60Hz
功率: 2000W
灯泡: 220V1000W / 220V1250W
220V2000W
色温: 3200K
特点: 带两个直流风机散热，噪音特小。
包装尺寸: 50×27×46cm
净重: 5.5Kg
毛重: 6.5Kg

Voltage:220V
Frequency:50-60Hz
Power consumption:2000W
Bulb: 220V1000W / 220V1250W
220V2000W
Color temperature:3200K
Feature:with two funs dissipation
system,lowest noise.
Packing Size:50×27×46cm
N.W. 5.5Kg G.W. 6.5Kg





B	H1	H	L1	L
350	375	435	490	462


DD-A009 带风机地排灯

DD-A009 Land Row Light With Fun

电压: 220V
频率: 50-60Hz
功率: 2000W
灯泡: 220V1000W / 220V1250W
220V2000W
色温: 3200K
特点: 带两个直流风机散热，噪音特小。
包装尺寸: 50×27×46cm
净重: 5.5Kg 毛重: 6.5Kg

Voltage:220V
Frequency:50-60Hz
Power consumption:2000W
Bulb: 220V1000W / 220V1250W
220V2000W
Color temperature:3200K
Feature:with two funs dissipation
system,lowest noise.
Packing Size:50×27×46cm
N.W. 5.5Kg G.W. 6.5Kg





B	L	H1	H
220	440	130	310

DD-A012 天幕云灯

DD-A012 Flood Light

电压: 220V
频率: 50-60Hz
功率: 1000W
灯泡: 220V1000W
色温: 3200K
包装尺寸: 47×32×49cm(8台)
净重: 17Kg 毛重: 17.8Kg

Voltage:220V
Frequency:50-60Hz
Power consumption:1000W
Bulb: 220V1000W
Color temperature:3200K
Packing Size:47×32×49cm(8pcs)
N.W. 17Kg G.W. 17.8Kg

观众灯特性

该泛光灯采用独特的灯阵组合设计,使舞台效果极具震憾力。
本灯具有重量轻,体积小,造型美观大方,铺光面积大,光质均匀等特点。广泛用于歌舞厅,舞台,电视演播厅和大型演唱会作为大面积泛光照明及增强场景效果使用,该灯具使用极其方便,并且可以组合成八头灯使用。

Specially disigned as an array of lamps

Light weight,compact size,pleasant appearance.
Used for lighting vast spaces or high lighting night clubs,stages,TV studios and large-scale vocal concerts.Easy handling,fabricating into "eight-head" blind light for special purposes.

DD-A068 八眼观众灯

DD-A068 Blind Light 8

电压: 220V	Voltage:220V
频率: 50-60Hz	Frequency:50-60Hz
功率: 5200W	Power consumption:5200W
灯泡: Q650Par36 120V650W×8	Bulb:Q650Par36 120V650W×8
色温: 3200K	Color temperature:3200K
包装尺寸: 77×46×16cm	Packing Size:77×46×16cm
净重: 7.5Kg 毛重: 8.5Kg	N.W:7.5Kg G.W: 8.5Kg

B	H1	H	L1	L
150	400	720	460	380



DD-A066 四眼观众灯

DD-A066 Blind Light 4

电压: 220V	Voltage:220V
频率: 50-60Hz	Frequency:50-60Hz
功率: 2600W	Power consumption:2600W
灯泡: Q650Par36 120V650W×4	Bulb:Q650Par36 120V650W×4
色温: 3200K	Color temperature:3200K
包装尺寸: 45.6×15.5×42cm	Packing Size:45.6×15.5×42cm
净重: 6Kg 毛重: 6.5Kg	N.W: 6Kg G.W: 6.5Kg

B	H1	H	L1	L
150	230	350	460	380



DD-A067 两眼观众灯

DD-A067 Blind Light 2

电压: 220V	Voltage:220V
频率: 50-60Hz	Frequency:50-60Hz
功率: 1300W	Power consumption:1300W
灯泡: Q650Par36 120V650W×2	Bulb:Q650Par36 120V650W×2
色温: 3200K	Color temperature:3200K
包装尺寸: 32×23×10cm	Packing size:32×23×10cm
净重:2.2Kg 毛重:3Kg	N.W: 2.2Kg G.W: 3Kg

B	H1	H	L1	L
85	150	190	310	250





B1	B2	H1	H2	L	H
365	445	440	530	350	330

DD-A004 高效影视冷回光灯

DD-A004 Coolbeam Film Cyclight

2000W冷光束回光灯，采用透红外，耐高温，介质膜冷光束反光碗，透光率高，射出的光比同类回光灯的温度低40%，温度的降低使灯泡寿命更长，工作温度的改善使换色器特别是色纸的寿命更长。
2000W coolbeam cyclight use infared,unti-high temperature,coolbeam reflector, with function of high brightness,homogeneous faculty,temperature of the brightness is lower 40% compare with the other cyclight ,these prolong the work life of the lamp and the color filter.


电源: 220V/50Hz
光源: 220V1000W/220V2000W
石英卤钨灯泡 G15
色温: 3200K
反光碗: ∅330mm
包装尺寸: 50×40×50cm
净重: 8Kg 毛重: 9Kg

Voltage:220V/50Hz
Power:220V1000W/220V2000W
Quartz lamp G15
Color temperature:3200K
Reflector: ∅330mm
Packing size: 50×40×50cm
N.W: 8Kg G.W: 9Kg

舞台柔光灯.聚光灯特性:

Features of stage soft light and spot light:

该系列灯具广泛适用于电影、剧场、舞台的顶光、面光、耳光、柱光等场合使用，也适用于舞台、演播室中为人物、布景、道具照明。本系列灯具采用高透光率、耐高温透镜，独特的反射系统，使其在同等条件下，照度更高，光斑更均匀，效果更好。灯体系采用优质铝合金结构，外观完美，散热好，温度低、强度高、安全性能好，经久耐用。
Widely used for the situations of stage,theatre,film top light, front light,side light,athwart light.it's a strong spot equipment.Suit to personality, project,prop,light.With effective lens and anti-high temperature,it's provide smooth illumination,better effect.it's use high quality aluminum alloy, beautiful appearance,excellent cooling effect.high brightness,safe,durable.

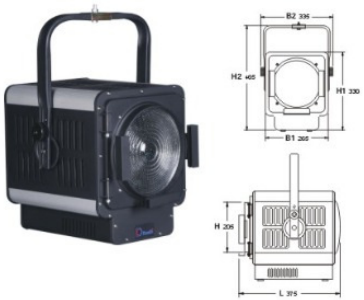

DD-A008 高效柔光灯

DD-A008 Soft Light

电源: 220V/50Hz
光源: 220V1000W/220V2000W
石英卤钨灯泡 G15
色温: 3200K
反光碗: ∅90mm
包装尺寸: 43×40×39cm
净重: 6Kg 毛重:7.2Kg

Voltage:220V/50Hz
Power:220V1000W/220V2000W
Quartz lamp G15
Color temperature:3200K
Reflector: ∅90mm
Packing size:43×40×39cm
N.W: 6Kg G.W: 7.2Kg

B1	B2	H1	H2	L	H
265	335	330	465	375	205



DD-A010 高效聚光灯

DD-A010 Big Spot Light

电源: 220V/50Hz
光源: 220V1000W/220V2000W
石英卤钨灯泡 G15
色温: 3200K
反光碗: ∅90mm
包装尺寸: 43×40×39cm
净重: 7Kg 毛重: 8.2Kg

Voltage:220V/50Hz
Power:220V1000W/220V2000W
Quartz lamp G15
Color temperature:3200K
Reflector: ∅90mm
Packing size: 43×40×39cm
N.W: 7Kg G.W: 8.2Kg

B1	B2	H1	H2	L	H
265	335	330	465	375	205

高效回光灯特性:

Features of High Efficiency Cyclight:

敦帝回光灯采用真空镀铝膜层及保护膜反光碗，光利用率高，照度好，射程远，光斑大小可连接调光。灯体采用优质钢铝结构。散热好，温度低，安全性能好。广泛用于电影，电视，剧院，舞台的面光，逆光，侧光等场合使用。

Dundi Cyclight ,with the mirrors vacuum with aluminum covers and the reflectors,is a strong spot equipment,long distance.The size of beam can be dimmed.Light body utilizes superior quality steel and aluminum entrusion profiles,excellent dissipation,low temperature..It's widely used for the situations of film,vidio,thretre,stage front light,side light,athwart light.


DD-A001 高效舞台回光灯

DD-A001 Stage Cyclight

电源: 220V/50Hz
光源: 220V1000W/220V2000W
半反射灯泡
色温: 3200K
反光碗: ¢330mm
包装尺寸: 50×40×50cm
净重: 8Kg 毛重: 9Kg

Power:220V/50Hz
Lamp:220V1000W/220V2000W
Semi-reflect shoot lamp
Color temperature:3200K
Reflector:¢330mm
Packing size:50×40×50cm
N.W: 8Kg G.W: 9Kg

B1	B2	H1	H2	L	H
365	445	440	530	350	330

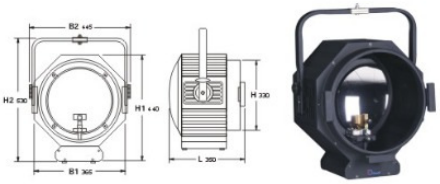


DD-A002 高效电影回光灯

DD-A002 Film Cyclight

电源: 220V/50Hz
光源: 220V1000W/220V2000W
石英卤钨灯泡 G15
色温: 3200K
反光碗: ¢330mm
包装尺寸: 50×40×50cm
净重: 8Kg 毛重: 9Kg

Power:220V/50Hz
Lamp:220V1000W/220V2000W
quartz lamp G15
Color temperature:3200K
Reflector:¢330mm
Packing size:50×40×50cm
N.W: 8Kg G.W: 9Kg

B1	B2	H1	H2	L	H
365	445	440	530	350	330

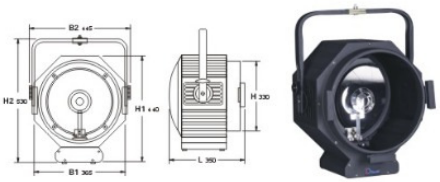


DD-A003 高效大回光灯

DD-A003 Big Stage Cyclight

电源: 220V/50Hz
光源: 220V1000W/220V2000W
半反射灯泡
色温: 3200K
反光碗: ¢400mm
包装尺寸: 59.5×46.7×60cm
净重: 10Kg 毛重: 11.7Kg

Power:220V/50Hz
Lamp:220V1000W/220V2000W
Semi-reflect shoot lamp
Color temperature:3200K
Reflector:¢400mm
Packing size:59.5×46.7×60cm
N.W:10Kg G.W: 11.7Kg

B1	B2	H1	H2	L	H
450	535	440	530	400	400

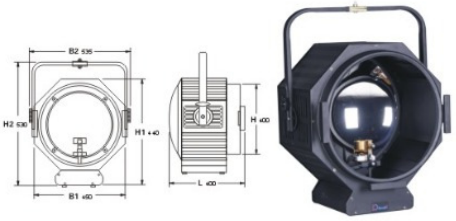


DD-A005 高效大电影回光灯

DD-A005 Big Film Cyclight

电源: 220V/50Hz
光源: 220V1000W/220V2000W
石英卤钨灯泡 G15
色温: 3200K
反光碗: ¢400mm
包装尺寸: 59.5×46.7×60cm
净重: 10Kg 毛重:12Kg

Power:220V/50Hz
Lamp:220V1000W/220V2000W
Quartz lamp G15
Color temperature:3200K
Reflector:¢400mm
Packing size: 59.5×46.7×60cm
N.W: 10Kg G.W: 12Kg

B1	B2	H1	H2	L	H
450	535	440	530	400	400

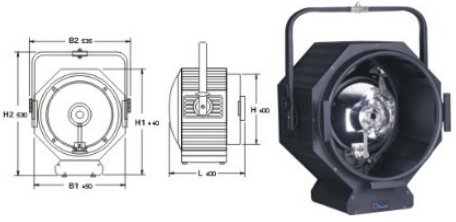

512 调光三基色特性：

光线柔和,均匀,舒适,无辐射热;
具有高效率反光镜和遮扉,灯具光能利用率高;
灯管色再现性好,显色指数达85-95,可与卤钨灯配合使用;
性能可靠,安全,经久耐用;
操作简单,方便易用;
环境适应强,在各种环境下皆能可靠工作;
对视频,音频无干扰;
调光曲线特佳;
一个DMX通道;
可以用专用控盒控制;

512 Dimmer Three Basic Color Soft Light Features：

Smooth even illumination,no radiation heat;
Excellent reflector and Barndoors, with high utilizing rate;
Excellent light reappearing,85%-95%,any Tungster Halogen lamps acceptable;
Reliable,safe and durable;
Excellent environment adapt ability ensures reliable operation under different circumstances;
No interfere with vidio and audio
Excellent dimmer curve
One DMX channel
Exclusive console



B	H	L1	L2
160	660	770	970

DD-A014 55×6三基色

DD -A014 55×6 Three Basic Color Light

广泛适用于舞台,电影,多功能会议室,新闻演播室
Widely used for the situations of stage,film,multi-functions meeting room,News reporting hall.

电压:220V/50Hz
光源:55W灯管×6
色温:3200K
功率:330W
净重:13Kg 毛重:16Kg
外型尺寸:66×46×16cm
包装尺寸:76.3×49×21.5cm

Voltage: 220V/50Hz
Lamp: 55W tube×6
Color temperature:3200K
Power: 330W
N.W: 13Kg G.W: 16Kg
Outline size: 66×46×16cm
Packing size: 76.3×49×21.5cm



B	H	L1	L2
160	660	590	860

DD-A016 55×4三基色

DD -A016 55×4 Three Basic Color Light

广泛适用于舞台,电影,多功能会议室,新闻演播室
Widely used for the situations of stage,film,multi-functions meeting room,News reporting hall.

电压:220V/50Hz
光源:55W灯管×4
色温:3200K
功率:220W
净重:8.7Kg 毛重:10Kg
外型尺寸:66×33×16cm
包装尺寸:76.3×37×21.5cm

Voltage: 220V/50Hz
Lamp: 55W tube×4
Color temperature:3200K
Power: 220W
N.W: 8.7Kg G.W: 10Kg
Outline size: 66×33×16cm
Packing size: 76.3×37×21.5cm



B	H	L1	L2
160	660	280	730

DD-A018 55×2三基色

DD -A018 55×2 Three Basic Color Light

广泛适用于舞台,电影,多功能会议室,新闻演播室
Widely used for the situations of stage,film,multi-functions meeting room,News reporting hall.

电压:220V/50Hz
光源:55W灯管×2
色温:3200K
功率:110W
净重:6Kg 毛重:7Kg
外型尺寸:66×19×16cm
包装尺寸:72×25×21.5cm

Voltage: 220V/50Hz
Lamp: 55W tube×2
Color temperature:3200K
Power: 110W
N.W: 6Kg G.W: 7Kg
Outline size: 66×19×16cm
Packing size: 72×25×21.5cm

DDL-4 四路调光三基色控盒

DDL-4 4 Channel DMX Three Basic Color Light Console




1.性能可靠，安全，经久耐用。
2.操作简单，方便易用，调光曲线特佳。
3.环境适应性能强，在各种条件下都能可靠工作。
4.控制距离不小于150米；
5.有4路独立输出；
6.可连续24小时工作。

1.Reliable,safe and durable;
2.Easy to use and learn;
3.Excellent environment adapt ability ensure reliable operation under different circumstances.
4.Control distance is more than 150m;
5.4 isolated channel output ;
6.Can be lasting work 24 hours.

DD-A015 36×6三基色

DD-A015 36×6 Three Basic Color Light






B	H	L1	L2
160	540	770	850

广泛适用于舞台,电影,多功能会议室,新闻演播室
Widely used for the situations of stage,film,multi-functions meeting room,News reporting hall.

电压:220V/50Hz	Voltage: 220V/50Hz
光源:36W灯管×6	Lamp: 36W tube×6
色温:3200K	Color temperature:3200K
功率:216W	Power: 216W
净重: 11.5Kg 毛重: 13.5Kg	N.W:11.5Kg G.W: 13.5Kg
外型尺寸: 54×46×16cm	Outline size: 54×46×16cm
包装尺寸: 64×49×21.5cm	Packing size: 64×49×21.5cm

DD-A017 36×4三基色

DD-A017 36×4 Three Basic Color Light






B	H	L1	L2
160	540	590	740

广泛适用于舞台,电影,多功能会议室,新闻演播室
Widely used for the situations of stage,film,multi-functions meeting room,News reporting hall.

电压:220V/50Hz	Voltage: 220V/50Hz
光源:36W灯管×4	Lamp: 36W tube×4
色温:3200K	Color temperature:3200K
功率:144W	Power: 144W
净重: 7.5Kg 毛重: 9Kg	N.W:7.5Kg G.W: 9Kg
外型尺寸: 54×33×16cm	Outline size: 54×33×16cm
包装尺寸: 64×38×21.5cm	Packing size: 64×38×21.5cm

DD-A019 36×2三基色

DD-A019 36×2 Three Basic Color Light





B	H	L1	L2
160	540	280	610


广泛适用于舞台,电影,多功能会议室,新闻演播室
Widely used for the situations of stage,film,multi-functions meeting room,News reporting hall.

电压:220V/50Hz	Voltage: 220V/50Hz
光源:36W灯管×2	Lamp: 36W tube×2
色温:3200K	Color temperature:3200K
功率:72W	Power: 72W
净重: 5Kg 毛重: 6.5Kg	N.W:5Kg G.W: 6.5Kg
外型尺寸: 54×19×16cm	Outline size: 54×19×16cm
包装尺寸: 64×25×21.5cm	Packing size: 64×25×21.5cm

换色器特性:
Color Changer Feature:

线路连结简单，操作方便。
采用了国际标准大功率双电机直联驱动结构。
采用了色纸辊筒向间隙调节结构,使换色器运行噪音大大降低。
选配数字解码器，可DMX512控制台控制。
常用规格有6种：150×150、200×200、250×250、330×330、400×400、430×330，亦可根据灯具口径量身订制。
Connecting and operating is convenient;
Using international standard strong power,double motor direct connecting driving.
Using the filter bobbin regulate the crevice of the color changer, lower a mount of noise.
Allocating digital relieving code,it can be controlled through DMX512 console.
There are six most common specification:150×150,200×200,250×250,330×330,400×400,430×330,We can also produce the color changer depend on the equipment.






DD-A035 ¢150换色器
DD-A035 ¢150 Color Changer Spot Light Instrument

适用于成像灯,P46聚光灯
包装尺寸: 26×8.5×33cm
净重: 1.7Kg 毛重: 2.4Kg
It’s suits Spotlight,P46 Spot lightings
Paking size:26×8.5×33cm
N.W:1.7Kg G.W:2.4Kg

B	H	H1	L	L1
58	270	150	245	150






DD-A033 ¢200换色器
DD-A033 ¢200 Color Changer Spot Light Instrument

适用于2000W舞台电影聚光灯.P64聚光灯,成像灯
包装尺寸: 31.5×8.5×37.5cm
净重: 1.8Kg 毛重: 2.5Kg
It’s suits 2KW stage, film,P64 Spot lightings,Spotlight
Paking size:31.5×8.5×37.5cm
N.W:1.8Kg G.W:2.5Kg

B	H	H1	L	L1
58	310	200	295	200





DD-A030 ¢250换色器
DD-A030 ¢250 Color Changer Spot Light Instrument

适用于2000W舞台电影聚光灯.P64聚光灯
包装尺寸: 36.7×8.5×49cm
净重: 2.1Kg 毛重: 3.1Kg
It’s suits 2KW stage, film,P64 Spot lightings
Paking size:36.7×8.5×49cm
N.W:2.1Kg G.W:3.1Kg


B	H	H1	L	L1
58	380	250	360	250

DD-A029 ¢330换色器

DD-A029 ¢330 Color Changer Wash Stage Instrument

适用于1000W¢330mm舞台回光灯及2000W¢330mm电影回光灯
包装尺寸: 44×8.5×49cm
净重: 2.6Kg 毛重: 3.6Kg
It's suits 1KW¢330mm stage cyc lightings or
2KW¢330mm film cyc lightings
Paking size:44×8.5×49cm
N.W:2.6Kg G.W: 3.6Kg

B	H	H1	L	L1
58	460	330	425	330






DD-A028 ¢400换色器

DD-A028 ¢400 Color Changer Wash Stage Instrument

适用于2000W¢400mm舞台回光灯及
3000W,5000W¢400mm电影回光灯
包装尺寸: 49.7×8.5×56.8cm
净重:3Kg 毛重: 4Kg
It's suits 2KW¢400mm stage cyc lightings or
3KW,5KW¢400mm film cyc lightings
Paking size:49.7×8.5×56.8cm
N.W:3Kg G.W: 4Kg

B	H	H1	L	L1
58	520	400	500	400






DD-A031 ¢260×400换色器

DD-A031 ¢260×400 Color Changer Wash Stage Instrument

适用于1000W, 1250W, 2000W天地排灯及电影散光灯
包装尺寸: 53×8.5×49cm
净重: 3Kg 毛重: 4Kg
It's suits 1KW ,1.25KW,2KW Sky and Land, film stage lightings
Paking size:53×8.5×49cm
N.W:3Kg G.W: 4Kg

B	H	H1	L	L1
58	460	330	530	430









H	L
70	420

DDL-04 四路换色器控台

DDL-04 4 Channel DMX Color Changer Console

主要功能特点

◎ 8色4组8通道输出,可对4个独立地址码编号,单独调架换色.编程记忆99场.
◎ 输入电源:AC220V±10% 50-60HZ
◎ 包装尺寸:52×20×14.5cm
◎ 净重:3.5kg 毛重:4kg

Main function and feature

◎ 8 colors,4 groups, 8 channels output, 4 give NO 512 separate place,independent color alteration,programming 99 scenes
◎ Input power: AC220V±10% 50-60HZ
◎ Packing size: 52×20×14.5cm
◎ N.W: 3.5kg G.W: 4kg





H	L
70	420

DDL-08 八路换色器控台

DDL-08 8 Channel DMX Color Changer Console

主要功能特点

◎ 8色4组16通道输出,可对8个独立地址码编号,单独调架换色.编程记忆99场.
◎ 输入电源:AC220V±10% 50-60HZ
◎ 包装尺寸:52×20×14.5cm
◎ 净重:3.7kg 毛重:4.2kg

Main function and feature

◎ 8 colors,4 groups, 16 channels output, 8 give NO 512 separate place,independent color alteration,programming 99 scenes
◎ Input power: AC220V±10% 50-60HZ
◎ Packing size: 52×20×14.5cm
◎ N.W: 3.7kg G.W: 4.2kg

DDL-1-4A / DDL-1-4B / DDL-F4 四路信号扩大器

DDL-1-4A / DDL-1-4B/ DDL-F4 4 Channel Signal Distributor

◎ DMX512 信号输入
◎ 1路非隔离的直通输出,4路光隔离输出
◎ 各输入输出接口之间的电气隔离电压: > 1000V
◎ 电源:AC220V,50-60Hz
◎ 内尺寸:
DDL-1-4A:48×12×4.5cm
DDL-F4:30×9×26cm
DDL-1-4B:30×9×26cm
◎ 包装尺寸:
DDL-1-4A:50×16×9.1cm
DDL-F4:31×13.5×30cm
DDL-1-4B:31×13.5×30cm
◎ 净重: 毛重:
DDL-1-4A:2.5kg 3.3kg
DDL-F4:2.3kg 3.1kg
DDL-1-4B:2.3kg 3.1kg

◎ DMX512 input
◎ 1 thru output without isolated,4 split output with optical isolated optical isolated > 1000V
◎ Power supply: AC220V,50-60Hz
◎ Size:
DDL-1-4A:48×12×4.5cm
DDL-F4:30×9×26cm
DDL-1-4B:30×9×26cm
◎ Packing size:
DDL-1-4A:50×16×9.1cm
DDL-F4:31×13.5×30cm
DDL-1-4B:31×13.5×30cm
◎ N.W: G.W:
DDL-1-4A:2.5kg 3.3kg
DDL-F4:2.3kg 3.1kg
DDL-1-4B:2.3kg 3.1kg


DDL-1-4A


DDL-1-4B

DDL-F4

DDL-1-6 六路信号扩大器

DDL-1-6 6 Channel Signal Distributor

◎ DMX512 信号输入
◎ 1路直通输出,6路信号扩大输出
◎ 电源:AC220V,50-60Hz
◎ 内尺寸:30×9×26cm
◎ 包装尺寸:31×13.5×30cm
◎ 净重:2kg 毛重: 2.5kg

◎ DMX512 input
◎ 1 thru output ,6 channel DMX distribution output
◎ Power supply: AC220V,50-60Hz
◎ Size: 30×9×26cm
◎ Packing size:31×13.5×30cm
◎ N.W: 2kg G.W: 2.5kg



DDL-1-8 八路信号扩大器

DDL-1-8 8 Channel Signal Distributor

◎ 两路DMX512 信号输入
◎ 2路非隔离的直通输出,8路光隔离输出
◎ 各输入输出接口之间的电气隔离电压: > 1000V
◎ 电源:AC220V,50-60Hz
◎ 外形尺寸:35×30×9.3cm
◎ 包装尺寸:38.5×13×31cm
◎ 净重:3.2 kg 毛重: 4.2 kg

◎ 2 DMX512 channel input
◎ 2 thru output without isolated,4 split output with optical isolated,optical isolated > 1000V
◎ Power supply: AC220V,50-60Hz
◎ Size: 35×30×9.3cm
◎ Packing size:38.5×13×31cm
◎ N.W: 3.2 kg G.W: 4.2 kg




换色器专用信号线

Color Changer Exclusive Signal Cable





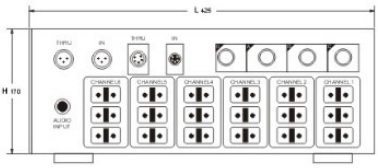


H	L
170	425

DDL - 6006　6×6KW 512智能硅箱控台

DDL-6006　6×6KW 512 Intel Dimmer Pack

主要功能特点:
- DMX512 信号，有6个DMX512 通道;
- 可直接在硅箱上6路独立调光，选择走灯程序及走灯速度和音频输入声控功能。
- 触发精度:512等级
- 调光曲线:10条
- 调光范围:0-100%
- 预热值设置:0-20%
- 连续工作:24小时
- 三相电压自动跟踪触发补偿，输出电压一致性极佳
- 高灵敏度空气开关过流,短路智能保护。
- 可控硅过载能力极强，抗击短路能力良好。
- 输入电压:三相四线AC380V或单相AC220V±10% 50-60Hz
- 输出功率:每路6KW
- 包装尺寸:53.5×55.5×25.5cm
- 净重:16.5Kg　毛重:19Kg

Main function and feature:
- Signal of DMX512,6 DMX channels;
- Every dimmer channel can be manually controlled independently to selects chase , speed of chase step and sound control.
- Trigger accuracy:512;
- Dimmer curve:10
- Dimmer range:0-100%
- Pre-hit setup:0-20%
- Lasting work:24 hours
- Three phase voltage automatic keep them in trigger compensated,the power supply have good uniformity.
- High sensitivity over current protection device and butter function air interrupt-switch,intel protection to avoid short circuit.
- The silican chip ,excellent overload capacity,be able to resist short circuit.
- Four wires and three phases 380V or single phases 220V±10% 50-60Hz
- Power in rating: 6KW/CH
- Size: 53.5×55.5×25.5cm
- N.W: 16.5Kg　G.W: 19Kg

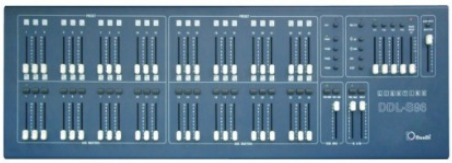

DDL-S96　96路数字调光台

DDL-S96　96 Channel Digital Dimmer

主要功能特点:
- 数字灯光控制台
- 电源:AC220V/50Hz
- 调光回路:96个调光回路输出;
- DMX512信号输出;
- 4根走灯效果杆，每个走灯最多可有12步骤,可同时运行;
- 24根集控杆，智能存储;　“一指通”智能存储
- 96根分控杆，分4页，每页24根;
- AB交叉衰减场,实现两场平滑交换;
- 切光功能和总控推杆控制全部输出回路的最高输出亮度值;
- 集控点控:一般点控和特效点控;
- 采用电子非电池式保存资料10年;
- 净重:13Kg

Main function and feature:
- Digital dimmer console
- Power: AC220V/50Hz
- Dimmer circuit:96 dimmer circuit output
- DMX512 output
- 4 chase faders,up to 12 steps of each chase,synchronous running available;
- 24 submaster faders,intelligent store;
- 96 field-master fader,4 page,24 fader of each page
- A,B scenes can be changed
- The highest value of brightness of all the output circuits are controlled by Dimmer and Master fader
- Submaster Flash key:common / unique
- Adopt electronic to save date 10 years.
- N.W: 13Kg

DDL-S12　12路数字调光台

DDL-S12　12 Channel Digital Dimmer



主要功能特点:

- 数字灯光控制台
- 电源:AC220V/50Hz
- 调光回路:12个调光回路输出;
- DMX512信号输出;
- 4根走灯效果杆,每个走灯最多可有12步骤,可同时运行;
- 12根集控杆，智能存储; “一指通”智能存储
- 12根分控杆
- AB交叉衰减场:实现两场平滑交换;
- 切光功能和总控推杆:控制全部输出回路的最高输出亮度值
- 集控点控:一般点控和特效点控
- 采用电子非电池式保存资料10年
- 尺寸: 71×39×12cm
- 包装尺寸: 76.6×46.5×18cm
- 净重: 8Kg

Main function and feature:

- Digital dimmer console
- Power: AC220V/50Hz
- Dimmer circuit:12 dimmer circuit output
- DMX512 output
- 4 chase faders,up to 12 steps of each chase,synchronous running available;
- 12 submaster faders,intelligent store;
- 12 field-master fader
- A,B scenes can be changed
- The highest value of brightness of all the output circuits are controlled by Dimmer and Master fader
- Submaster Flash key:common / unique flash key
- Adopt electronic to save date 10 years.
- Size: 71×39×12cm
- Packing size: 76.6×46.5×18cm
- N.W: 8Kg

DDL-S24　24路数字调光台

DDL-S24　24 Channel Digital Dimmer



主要功能特点:

- 数字灯光控制台
- 电源:AC220V/50Hz
- 调光回路:24个调光回路输出;
- DMX512信号输出;
- 4根走灯效果杆,每个走灯最多可有12步骤,可同时运行;
- 12根集控杆,智能存储; “一指通”智能存储
- 12根分控杆,分2页
- AB交叉衰减场:实现两场平滑交换;
- 切光功能和总控推杆:控制全部输出回路的最高输出亮度值
- 集控点控:一般点控和特效点控
- 采用电子非电池式保存资料10年
- 尺寸: 71×39×12cm
- 包装尺寸: 76.6×46.5×18cm
- 净重: 8Kg

Main function and feature:

- Digital dimmer console
- Power: AC220V/50Hz
- Dimmer circuit:24 dimmer circuit output
- DMX512 output
- 4 chase faders,up to 12 steps of each chase,synchronous running available;
- 12 submaster faders,intelligent store;
- 12 field-master fader,2 page
- A,B scenes can be changed
- The highest value of brightness of all the output circuits are controlled by Dimmer and Master fader
- Submaster Flash key:common / unique flash key
- Adopt electronic to save date 10 years.
- Size: 71×39×12cm
- Packing size: 76.6×46.5×18cm
- N.W: 8Kg

DDL-S48　48路数字调光台

DDL-S48　48 Channel Digital Dimmer



主要功能特点:

- 数字灯光控制台
- 电源:AC220V/50Hz
- 调光回路:48个调光回路输出;
- DMX512信号输出;
- 4根走灯效果杆,每个走灯最多可有12步骤,可同时运行;
- 12根集控杆,智能存储; “一指通”智能存储
- 12根分控杆,分4页
- AB交叉衰减场:实现两场平滑交换;
- 切光功能和总控推杆:控制全部输出回路的最高输出亮度值
- 集控点控:一般点控和特效点控
- 采用电子非电池式保存资料10年
- 尺寸: 71×39×12cm
- 包装尺寸: 76.6×46.5×18cm
- 净重: 8Kg


Main function and feature:

- Digital dimmer console
- Power: AC220V/50Hz
- Dimmer circuit:48 dimmer circuit output
- DMX512 output
- 4 chase faders,up to 12 steps of each chase,synchronous running available;
- 12 submaster faders,intelligent store;
- 12 field-master fader,4 page
- A,B scenes can be changed
- The highest value of brightness of all the output circuits are controlled by Dimmer and Master fader
- Submaster Flash key:common / unique flash key
- Adopt electronic to save date 10 years.
- Size: 71×39×12cm
- Packing size: 76.6×46.5×18cm
- N.W: 8Kg

该系列产品是一款新开发功能独特的大功率数字调光台。每路8KW采用双80A大功率可控硅。带有空开保护。4个风机进出风对流散热，可分段设定各种功能运行，不同段可同时运行各种功能。可分段走灯，声控,点控,总点控等功能，在运行走灯程序时可以调光。

This series products are new developed,unique functions and strong power digital dimmer.8KW each channel,the silicon chip with double strong power "80A" .Protection of circuit-breaker,four heat dissipation funs,can be set the range to running the function,synchronous running availabe,has the function of chase,sound control, flash key,master flash key,can be dimming under running state etc.



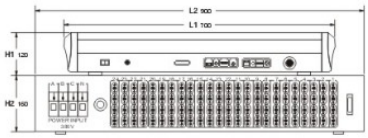

L1	L2	H1	H2
700	900	120	160


DDL-8024 分体式数字调光台

DDL-8024 Split Digital Dimmer

基本功能特点:
- ◎ 每路带有空开保护
- ◎ 24路调光输出
- ◎ 在运行走灯程序时可以调光
- ◎ 可分段设定各种功能运行,不同段可同时运行各种功能.
- ◎ 带音频输入
- ◎ 输入电压:三相四线AC380V或单相AC220V±10% 50-60Hz
- ◎ 每路功率:8KW
- ◎ 内尺寸: 71×39×12cm(调光台)
- ◎ 内尺寸: 93×53×20cm(硅箱)
- ◎ 外包装尺寸: 77.6×46.5×18cm(调光台)
- ◎ 外包装尺寸: 100×56×24cm(硅箱)
- ◎ 净重:8Kg(调光台) 35Kg(硅箱)
- ◎ 毛重: 10Kg(调光台) 37Kg(硅箱)

Main function and feature:
- ◎ Protection of circuit-breaker
- ◎ 24 channel dimmer output
- ◎ Can be dimming in running state
- ◎ Can be set the range to running the function,synchronous running availabe
- ◎ with audio input
- ◎ Four wires and three phases 380V or single phases 220V ±10% 50-60Hz
- ◎ Power rated:8KW
- ◎ Console's size: 71×39×12cm
- ◎ Dimmer's size: 93×53×20cm
- ◎ Console's packing size: 77.6×46.5×18cm
- ◎ Dimmer's packing size: 100×56×24cm
- ◎ N.W: 8Kg(console) 35Kg(dimmer)
- ◎ G.W: 10Kg(console) 37Kg(dimmer)





L1	L2	H1	H2
560	700	120	160


DDL-8016 分体式数字调光台

DDL-8016 Split Digital Dimmer

基本功能特点:
- ◎ 每路带有空开保护
- ◎ 16路调光输出
- ◎ 在运行走灯程序时可以调光
- ◎ 可分段设定各种功能运行,不同段可同时运行各种功能
- ◎ 带音频输入
- ◎ 输入电压:三相四线AC380V或单相AC220V±10% 50-60Hz
- ◎ 每路功率:8KW
- ◎ 内尺寸: 56×39×12cm(调光台)
- ◎ 内尺寸: 76×53×20cm(硅箱)
- ◎ 外包装尺寸: 64×46.5×18cm(调光台)
- ◎ 外包装尺寸: 79×56×24cm(硅箱)
- ◎ 净重:6.5Kg(调光台) 26Kg(硅箱)
- ◎ 毛重: 8.5Kg(调光台) 28Kg(硅箱)

Main function and feature:
- ◎ Protection of circuit-breaker
- ◎ 16 channel dimmer output
- ◎ Can be dimming in running state
- ◎ Can be set the range to running the function, synchronous running availabe
- ◎ with audio input
- ◎ Four wires and three phases 380V or single phases 220V ±10% 50-60Hz
- ◎ Power rated:8KW
- ◎ Console's size: 56×39×12cm
- ◎ Dimmer's size: 76×53×20cm
- ◎ Console's packing size: 64×46.5×18cm
- ◎ Dimmer's packing size: 79×56×24cm
- ◎ N.W:6.5Kg(console) 26Kg(dimmer)
- ◎ G.W: 8.5Kg(console) 28Kg(dimmer)





L1	L2	H1	H2
480	555	120	160

DDL-8012　分体式数字调光台

DDL-8012　Split Digital Dimmer


基本功能特点:

◎ 每路带有空开保护
◎ 12路调光输出
◎ 在运行走灯程序时可以调光
◎ 可分段设定各种功能运行,不同段可同时运行各种功能
◎ 带音频输入
◎ 输入电压:三相四线AC380V或单相AC220V±10% 50-60Hz
◎ 每路功率:8KW
◎ 内尺寸: 49×39×12cm(调光台)
◎ 内尺寸: 61×53×20cm(硅箱)
◎ 外包装尺寸: 56.5×46.5×20.5cm(调光台)
◎ 外包装尺寸: 64×56×24cm(硅箱)
◎ 净重:5.6Kg(调光台) 22Kg(硅箱)
◎ 毛重: 7.1Kg(调光台) 24Kg(硅箱)

Main function and feature:

◎ Protection of circuit-breaker
◎ 12 channel dimmer output
◎ Can be dimming in running state
◎ Can be set the range to running the function,synchronous running availabe
◎ with audio input
◎ Four wires and three phases 380V or single phases 220V ±10% 50-60Hz
◎ Power rated:8KW
◎ Console's size: 49×39×12cm
◎ Dimmer's size: 61×53×20cm
◎ Console's packing size: 56.5×46.5×20.5cm
◎ Dimmer's packing size: 64×56×24cm
◎ N.W: 5.6Kg(console)22Kg(dimmer)
◎ G.W: 7.1Kg(console) 24Kg(dimmer)





L1	L2	H1	H2
480	450	120	160

DDL-8008　分体式数字调光台

DDL-8008　Split Digital Dimmer

基本功能特点:

◎ 每路带有空开保护
◎ 8路调光输出
◎ 在运行走灯程序时可以调光
◎ 可分段设定各种功能运行,不同段可同时运行各种功能
◎ 带音频输入
◎ 输入电压:三相四线AC380V或单相AC220V±10% 50-60Hz
◎ 每路功率:8KW
◎ 内尺寸: 49×39×12cm(调光台)
◎ 内尺寸: 51×53×20cm(硅箱)
◎ 外包装尺寸: 54×43×16cm(调光台)
◎ 外包装尺寸: 54×56×24cm(硅箱)
◎ 净重:5.6Kg(调光台) 18Kg(硅箱)
◎ 毛重: 7.1Kg(调光台) 19.5Kg(硅箱)


Main function and feature:

◎ Protection of circuit-breaker
◎ 8 channel dimmer output
◎ Can be dimming in running state
◎ Can be set the range to running the function,synchronous running availabe
◎ with audio input
◎ Four wires and three phases 380V or single phases 220V ±10% 50-60Hz
◎ Power rated:8KW
◎ Console's size: 49×39×12cm
◎ Dimmer's size: 51×53×20cm
◎ Console's packing size:54×43×16cm
◎ Dimmer's packing size: 54×56×24cm
◎ N.W: 5.6Kg(console)18Kg(dimmer)
◎ G.W: 7.1Kg(console) 19.5Kg(dimmer)

该系列产品是一款新开发功能独特的大功率数字调光台。每路4KW，双风机进出风对流散热，可分段设定各种功能运行，不同段可同时运行各种功能。可分段走灯，声控，点调,总点控等功能。在运行走灯程序时可以调光。

This series products are new developed,unique functions and strong power digital dimmer.4kW each channel,fDouble heat dissipation funs,can be set the range to running the function,synchronous running availabe,has the function of chase,sound control,flash key,master flash key,etc.



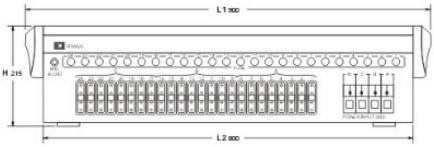

L1	L2	H
900	800	215


DDL-2404　24路一体式数字调光台

DDL-2404　24 Integrated Digital Dimmer

基本功能特点:
- ◎ 24路调光输出
- ◎ 可分段设定各种功能运行，不同段可同时运行各种功能。
- ◎ 带音频输入
- ◎ 输入电压:三相四线AC380V或单相AC220V±10% 50-60Hz
- ◎ 每路功率: 4KW
- ◎ 内尺寸:90×38×21.5cm
- ◎ 包装尺寸: 96×44×28cm
- ◎ 净重: 22.5Kg
- ◎ 毛重: 25Kg

Main function and feature:
- ◎ 24 channel dimmer output
- ◎ Can be set the range to running the function,synchronous running availabe
- ◎ Four wires and three phases 380V or single phases 220V ±10% 50-60Hz
- ◎ Power rated: 4KW
- ◎ With audio input
- ◎ Size:90×38×21.5cm
- ◎ Packing size:96×44×28cm
- ◎ N.W: 22.5Kg
- ◎ G.W: 25Kg



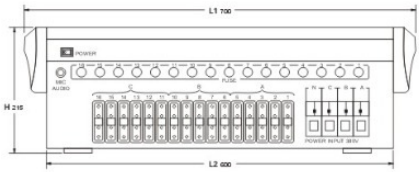

L1	L2	H
700	600	215


DDL-1604　16路一体式数字调光台

DDL-1604　16 Integrated Digital Dimmer

基本功能特点:
- ◎ 16路调光输出
- ◎ 可分段设定各种功能运行，不同段可同时运行各种功能。
- ◎ 带音频输入
- ◎ 输入电压:三相四线AC380V或单相AC220V±10% 50-60Hz
- ◎ 每路功率: 4KW
- ◎ 尺寸:71×38×21.5cm
- ◎ 包装尺寸: 77×44×28cm
- ◎ 净重: 18Kg
- ◎ 毛重: 20Kg

Main function and feature:
- ◎ 16 channel dimmer output
- ◎ Can be set the range to running the function,synchronous running availabe
- ◎ Four wires and three phases 380V or single phases 220V ±10% 50-60Hz
- ◎ Power rated: 4KW
- ◎ With audio input
- ◎ Size:71×38×21.5cm
- ◎ Packing size: 77×44×28cm
- ◎ N.W:6.5Kg(console) 26Kg(dimmer)
- ◎ G.W: 8.5Kg(console) 28Kg(dimmer)



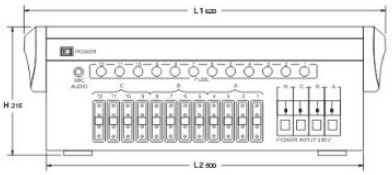

L1	L2	H
620	500	215


DDL-1204　12路一体式数字调光台

DDL-1204　12 Integrated Digital Dimmer

基本功能特点：
- ◎ 12路调光输出
- ◎ 可分段设定各种功能运行，不同段可同时运行各种功能
- ◎ 带音频输入
- ◎ 输入电压:三相四线AC380V或单相AC220V±10% 50-60Hz
- ◎ 每路功率: 4KW
- ◎ 尺寸：62×38×21.5cm
- ◎ 包装尺寸：68×44×28cm
- ◎ 净重：13.6Kg
- ◎ 毛重：15.2Kg

Main function and feature:
- ◎ 12 channel dimmer output
- ◎ Can be set the range to running the function,synchronous running availabe
- ◎ With audio input
- ◎ Four wires and three phases 380V or single phases 220V ±10% 50-60Hz
- ◎ Power rated: 4KW
- ◎ size:62×38×21.5cm
- ◎ packing size:68×44×28cm
- ◎ N.W.13.6 Kg
- ◎ G.W: 15.2Kg





L1	L2	H
520	400	215


DDL-8004　8路一体式数字调光台

DDL-8004　8 Integrated Digital Dimmer

基本功能特点：
- ◎ 8路调光输出
- ◎ 可分段设定各种功能运行，不同段可同时运行各种功能。
- ◎ 带音频输入
- ◎ 输入电压：三相四线AC380V或单相AC220V±10% 50-60Hz
- ◎ 每路功率: 4KW
- ◎ 尺寸：52×38×21.5cm
- ◎ 包装尺寸：58×44×28 cm
- ◎ 净重：9.8Kg
- ◎ 毛重：11.5Kg

Main function and feature:
- ◎ 8 channel dimmer output
- ◎ Can be set the range to running the function,synchronous running availabe
- ◎ With audio input
- ◎ Four wires and three phases 380V or single phases 220V ±10% 50-60Hz
- ◎ Power rated: 4KW
- ◎ size:52×38×21.5cm
- ◎ packing size:58×44×28cm
- ◎ N.W. 9.8Kg
- ◎ G.W: 11.5Kg





H	L
230	520

DDL - 4016　4KW 16路数字电脑控台

DDL-4016　4KW 16 Channels Digital Dimmer Pack


基本功能特点:

- 有8路直通空气开关,有8路独立调光、点控、48种走灯程序,走灯速度可调节,带音频输入
- 输入电压:三相四线AC380V或单相AC220V±10% 50-60Hz
- 输出功率:每路4KW
- 包装尺寸:57×46×28.5cm
- 净重8Kg　　毛重:9.6Kg

Main function and feature:

- 8 air switch,8 channel of independent dimmer,flash key, 48 chases,adjustable running speed,audio input
- Four wires and three phases 380V or single phases 220V ±10% 50-60Hz
- Power in rating:4KW/CH
- Packing Size: 57×46×28.5cm
- IN.W: 8Kg G.W: 9.6Kg





H	L
110	400

DDL- 3016　3KW 16路数字电脑控台

DDL-3016　3KW 16 Channels Digital Dimmer Pack


基本功能特点:

- 有8路直通开关，有8路独立调光、点控48种走灯程序，走灯速度可调节，带声控功能
- 输入电源:AC220V±10% 50-60Hz
- 输出功率:每路3KW
- 包装尺寸: 53×39×16.5cm
- 净重:5.5Kg　　毛重: 6.5 Kg

Main function and feature:

- 8 air switch,8 channel of independent dimmer,flash key, 48 chases,adjustable running speed,sound control.
- Voltage: AC220V±10% 50-60Hz
- Power in rating:3KW/CH
- Packing Size: 53×39×16.5cm
- N.W: 5.5 Kg　　G.W: 6.5 Kg





H	L
130	430

DDL-40012　4KW 12路开关接线盒


DDL-40012　4KW 12 Channel Power Switch Pack

主要功能参数：

- 输入电压:三相四线AC380V或单相AC220V±10% 50-60Hz
- 输出功率:每路4KW
- 12路20A空气回路短路保护
- 尺寸:49×49×13cm
- 包装尺寸: 53.5×55.5×25.5cm
- 净重12Kg 毛重: 13.5 Kg

Main function and feature:

- Four wires and three phases 380V or single phases 220V±10% 50-60Hz
- Output power:4KW/CH
- 12 channels 20A switch output and triac
- Size: 49×49×13cm
- Packing size: 53.5×55.5×25.5cm
- N.W:12Kg G.W: 13.5 Kg

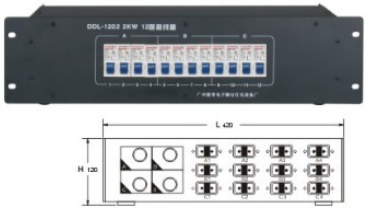

H	L
120	420

DDL-1202　2KW 12路开关接线盒

DDL-1202　2KW 12 Channel Power Switch Pack

主要功能参数：

- 输入电压:三相四线AC380V或单相AC220V±10% 50-60Hz
- 输出功率:每路2KW
- 12路10A空气回路短路保护
- 包装尺寸:52.7×24×18.5cm
- 净重4.3 Kg 毛重:5.7 Kg

Main function and feature:

- Four wires and three phases 380V or single phases 220V±10% 50-60Hz
- Output power:2KW/CH
- 12 channels 10A switch output and triac
- Size: 52.7×24×18.5cm
- N.W:4.3Kg G.W: 5.7Kg



H	L
180	430

DDL-K300　电源箱

DDL-K300　Power Supply Pack

主要功能参数：

- 自带直通电源插座和高度灵敏度空气开关,方便工作照明配套设备的供电使用
- 单路或多路连接,接线既安全又方便
- 分四组三相四线AC380V独立输出, 每组40KW
- 有一组单相AC220V/2KW独立输出
- 外形尺寸:49×49×17cm
- 包装尺寸: 53.5×55.5×25.5cm
- 净重:12 Kg 毛重:13.5 Kg

Main function and feature:

- With power switch and high sensitive air switch,convenience for power supply of lamp equipment.
- Single or multi-channel connection,safe and easy.
- Four group four wires and three phases AC380V isolated output,40KW/CH
- One group 220V /2KW isolated output
- Outline size: 49×49×17cm
- Packing size: 53.5×55.5×25.5cm
- N.W:12Kg G.W: 13.5Kg

DD-DMX512无线收发调制解调器以无线的方式传输DMX512协议标准数据。该产品彻底解决了DMX512协议灯光控制台与灯之间的数据的无线传输，完全去掉长期以来所依赖的双绞线。在数据的传输过程中做到无时延。数据实时性好和可靠。它适用于电脑灯控台，舞台灯控台，大型文艺演出，体育馆灯光控制，临时舞台演出，城市灯光系统，电视台，会议中心，大学工专业剧院，主题公园，歌舞厅，酒吧和小型文艺演出。

DD-DMX512 wireless modem to send and receive wireless means transmission of data DMX512 protocol standards. The product completely solve the DMX512 lighting console with the agreement between the lights of wireless data transmission, has long been completely removed by relying on the twisted pair. In the course of transmission of data do not delay, real-time data and good and reliable!It suit for the Computer light control, Stage light control,Super theatrical performance,Gymnasium light control,Provisional stage performance,City lighting system,Television station,Conference center,University and speciality theater,Theme park,KTV ,pub and family celebration.



DDL-RF512 无线512信号发射接收器

DDL-RF512 DMX Wireless Transmitter

技术参数
电源：AC90-240V 50/60Hz
协议：国际通用的DMX 512 协议
传输容量：可支持连续数据实时传送
天线配置：SMA 型接头天线（或可选用高增益天线）
可选频道数：0-127
可设功率等级：4级
可设发射器序号数：0-255
最多可支持同时工作的发射器数量级：128个
一个发射器所能支持的接收器数量级：无限制
可视传输距离：200米
内尺寸：28×20×8.5cm
包装尺寸：34×28×15cm
净重：1.9kg
毛重：2.7kg

Technique Specification
Power : AC90-240V 50/60Hz
Agreement : International standard DMX 512 agreement
Transmission capacity : Support for real-time data transmission
Antenna arrangement : SMA model socket antenna （or choose high-gain antenna）
Optional number of channels : 0-127
Power levels can be established : 4levels
Transmitter serial number can be set : 0-255
Amount transmitter supported at the same time : 128
One transmitter can support the number of receivers : Unlimited
Visual transmission distance : 200m
Outine size : 28×20×8.5cm
Packing size: 34×28×15cm
N.W. 1.9kg
G.W. 2.7kg



DDL-32 512电脑控台

DDL-32 512 Light Controllor

主要功能特点：
- ◎ 国际标准的DMX512信号输出；
- ◎ 软分配可控电脑灯的通道数（1-32通道可以设置），控置台的配置由你作主；
- ◎ 自动软分配可控电脑灯数量（16-64台设备），满足你的实际需要；
- ◎ 全新的电子说明书功能，让你立即上手；
- ◎ 多语言显示系统（中／英文），方便国内外用户使用；
- ◎ 友好的操作界面，简便的操作流程，流行的操作模式；
- ◎ 典雅，大方以及高贵的外形设计；
- ◎ 32路调光控制;
- ◎ 32路点控功能;
- ◎ 调光集控功能;
- ◎ 总通道数为512通道;
- ◎ 最多可编48个走灯程序,每个走灯程序最多可以编100步;
- ◎ 由于控制台可以由您自由配置,所以适用于大型,中型及小型各种演出场合使用;
- ◎ 内尺寸:60×39×16cm;
- ◎ 包装尺寸:67×46.5×18.5cm
- ◎ 净重:7kg　　毛重:9kg

Features & Specifications
- ◎ international standard DMX512 signal output.
- ◎ 1-32 channels can be set,the disposition of the console is up to you.
- ◎ 16-64 scanners can be connected to meets your actual needs.
- ◎ New electric-instruction,you can use it immediately.
- ◎ Multi-language display system(Chinese&English)to meet the demand of different customers.
- ◎ Comfortable operational-layout,convenient operation,popular running mode.
- ◎ Elegant,natural as well as noble configuration design.
- ◎ 32 channel dimmer control.
- ◎ 32 channel flash key
- ◎ dimmer sub-master.
- ◎ 512 channels in all
- ◎ 48 chases,up to 100 steps each.
- ◎ Outline size: 60×39×16cm;
- ◎ Packing size: 67×46.5×18.5cm
- ◎ N.W:7kg　　G.W: 9kg



DDL-16 512电脑控台

DDL-16 512 Light Controllor


主要功能特点：
- ◎ 国际标准的DMX512信号输出；
- ◎ 软分配可控电脑灯的通道数(1-16通道可以设置)，控制台的配置由你作主；
- ◎ 自动软分配可控电脑灯数量（32-64台设备），满足你的实际需要；
- ◎ 全新的电子说明书功能，让你立即上手；
- ◎ 多语言显示系统（中／英文），方便国内外用户的使用；
- ◎ 友好的操作界面,简便的操作流程,流行的操作模式；
- ◎ 典雅，大方以及高贵的外形设计；
- ◎ 总通道数为512通道；
- ◎ 最多可以编48个走灯程序，每个走灯程序最多可以编100步；
- ◎ 由于控制台可以由您自由配置,所以适用于大型,中型和小型各种演出场合使用；
- ◎ 外形尺寸:60×39×16cm;
- ◎ 包装尺寸:67×46.5×18.5cm
- ◎ 净重:7kg　毛重:9kg


Features & Specifications
- ◎ international standard DMX512 signal output
- ◎ 1-16 channels can be set,the disposition of the console is up to you
- ◎ 32-64 scanners can be connected to meets your actual needs.
- ◎ New electric-instruction,you can use it immediately.
- ◎ Multi-language display system(Chinese&English)to meet the demand of different customers;
- ◎ Comfortable operational-layout,convenient operation,popular running mode.
- ◎ Elegant,natural as well as noble configuration design.
- ◎ 512 channels in all.
- ◎ 48 chases,up to 100 steps each.
- ◎ it's the best suit for any kind of performance occasions.
- ◎ Outline size: 60×39×16cm;
- ◎ Packing size: 67×46.5×18.5cm
- ◎ N.W:7kg G.W: 9kg

该产品灯体采用高压铸铝结构，具备良好的散热性能。轻巧美观、防尘、防水。控制模式有DMX512控制模式、内置自走程序模式、主从机同步自走程序模式，通过ARM内置微处理器，以驱动芯片高精度恒流控制模式。采用PWM数字调光系统实现256级亮度调节，具备RGB混色、频闪和声控功能，有无限的RGB颜色混色系统。LED寿命为5000-10000小时，光学透镜角度15°、25°、38°、45°、60°可任选。该产品适用室内外舞台、建筑照明、景观照明等。

The light body utilize high-pressure cast aluminum structure, with good heat dissipation. Beautiful light, dust and waterproof. Be controlled by DMX512 control mode, built-in automate program mode ,master/slave synchronous automate program mode, via ARM built-in microprocessor to drive chip high-precision constant current control mode. Adopt PWM digital dimming systems Real View 256 brightness adjustment, with RGB color mixing, strobe, and sound control features, there are infinite RGB color mixing system. LED life of 5000-10000 hours, the optical lens angle of 15°, 25°, 38°, 45°, 60° optional. The product is suitable for indoor and outdoor stage, architectural lighting, landscape lighting etc.







DD-LED54HS 防水LED变色灯

额定电压：AC90-240V/50-60Hz
光　源：
A款54颗3WLED，红12颗、绿14颗，蓝14颗，白14颗
B款54颗3WLED，红18颗，绿18颗，蓝18颗
C款：白光54颗3WLED，全白光（3200K色温或5600色温）
总 功 率：170W
控制信号：DMX512
控制通道：A款(8通道)、B款（7通道）、C款（3通道）
防护等级：IP65
净　重：8kg　　毛重：9.5kg
内 尺 寸：34×23×29.5cm
外 尺 寸：37×29×33.5cm

DD-LED54HS Waterproof LED Color Changed Light


Voltage: AC90-240V/50-60Hz
Lamp:
A model 54pcs 3W LED chip, red 12pcs,green 14pcs, blue 14pcs,white 14pcs
B model 54pcs 3W LED chip, red 18pcs,green 18pcs, blue 18pcs
C model 54pcs 3W LED chip, full white(3200k color temperature or 5600k color temperature)
Power consumption :170W
Control signal : DMX512
Control channel: A model(8 channel),B model(7 channel), C model(3 channel)
Protection grade: IP65
Net weight: 8kg　Gross weight: 9.5kg
Size: 34×23×29.5cm
Packing size: 37×29×33.5cm


B1	B2	H	L
235	342	335	230

该产品灯体采用高压铸铝结构，具备良好的散热性能。带有风机散热。控制模式有DMX512控制模式，内置自走程序模式、主从机同步自走程序模式。通过ARM内置微处理器，以驱动芯片高精度恒流控制模式。采用PWM数字调光系统实观256级亮度调节，具备RGB混色、频闪和声控功能，有无限的RGB颜色混色系统。LED寿命为5000-10000小时，光学透镜角度15°、25°、38°、45°、60°可任选。

The light body utilize high-pressure cast aluminum structure, with good heat dissipation. Beautiful light, dust and waterproof. Be controlled by DMX512 control mode, built-in automate program mode ,master/slave synchronous automate program mode, via ARM built-in microprocessor to drive chip high-precision constant current control mode. Adopt PWM digital dimming systems Real View 256 brightness adjustment, with RGB color mixing, strobe, and sound control features, there are infinite RGB color mixing system. LED life of 5000-10000 hours, the optical lens angle of 15°, 25°, 38°, 45°, 60° optional.







DD-LED54HS 防水LED变色灯

额定电压：AC90-240V/50-60Hz
光　源：
A款54颗3WLED，红12颗、绿14颗，蓝14颗，白14颗
B款54颗3WLED，红18颗，绿18颗，蓝18颗
C款：白光54颗3WLED，全白光（3200K色温或5600色温）
总 功 率：170W
控制信号：DMX512
控制通道：A款（8通道）、B款（7通道）、C款（3通道）
净　重：5kg　　毛重：6.5kg
内 尺 寸：24×23×38.5cm
外 尺 寸：27×29×42.5cm

DD-LED54 LED Color Changed Light

Voltage: AC90-240V/50-60Hz
Lamp:
A model 54pcs 3W LED chip, red 12pcs,green 14pcs, blue 14pcs,white 14pcs
B model 54pcs 3W LED chip, red 18pcs,green 18pcs, blue 18pcs
C model 54pcs 3W LED chip, full white(3200k color temperature or 5600k color temperature)
Power consumption :170W
Control signal :DMX512
Control channel: A model(8 channel),B model(7 channel), C model(3 channel)
Protection grade: IP65
Net weight: 5kg Gross weight: 6.5kg
Size: 24×23×38.5cm
Packing size: 27×29×42.5cm

B1	B2	H	L
225	290	353	310

四合一LED变色灯是由4只108颗?10超亮度LED灯组合产品。外观设计美观、功能独特、性能稳定、配用防震箱包。控制模式有DMX512控制模式，有脚踏盒、手控盒控制内置自走程序模式，有主从机同步自走程序模式。该产品适用范围广，可用于舞台、舞厅、KTV、家庭和随身外带与朋友相聚各种晚会场合用。

Four in one LED color change light combinated by 4 LED spotlight ,each include 108pcs super bright Φ10 LED chip. Beautiful design, unique functions, stable performance, is equipped with shock bags. Be controlled by DMX512 control mode, a pedal box, manual control box built-in automate program model., master/slave synchronous mode of automate program . Wide scope of application for stage, disco, KTV, family and friends together with a variety of portable take-party occasion to use.



DD-LED4HIT 四合一LED变色灯

额定电压：AC90-240V/50-60Hz
光源：432颗∅10超亮度LED,红144、绿144、蓝144
总 功 率： 70W
控制模式：DMX512模式，控盒自走程序控制模式，主从机同步模式（带有声控）
DMX通道数：15通道
净重：8.5kg 毛重：14kg
包装尺寸：136×41×19.5cm

DD-LED4HIT Four In One LED Color Changed Light

Voltage: AC90-240V/50-60Hz
Lamp: 432pcs ∅10 super bright LED chip, red 144pcs, green 144pcs,blue 144pcs
Power consumption :70W
Control model : DMX512 control model, a pedal box, automate program model., master/slave synchronous model (include sound control)
DMX channels: 15
Net weight: 8.5kg Gross weight: 14kg
Packing size: 136×41×19.5cm










DD-LED4HIG 四合一LED变色灯

DD-LED4HIG Four In One LED Color Change Light

额定电压：AC90-240V/50-60Hz
光源：432颗∅10超亮度LED，红144、
绿144、蓝144
总 功 率： 70W
控制模式：DMX512模式，控盒自走程序控制模式，
主从机同步模式（带有声控）
DMX通道数：15通道

Voltage: AC90-240V/50-60Hz
Lamp: 432pcs ∅10 super bright LED chip, red 144pcs,
green 144pcs,blue 144pcs
Power consumption :70W
Control model : DMX512 control model, a pedal box,
automate program model., master/slave synchronous
model (include sound control)
DMX channels: 15

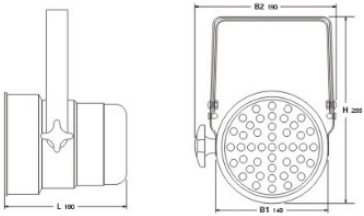

B1	B2	H	L
148	190	255	180



DD-LED P38变色灯

DD-LED P38

额定电压：AC90-240V/50-60Hz
光源：75颗∅10超亮度LED、红25、绿25、蓝25
总 功 率： 40W
控制模式：DMX512模式，声控或自走模式，
主从机控制模式
DMX通道数：7通道
净重：1kg 毛重：1.3kg
包装尺寸：16×16×27cm

Voltage: AC90-240V/50-60Hz
Lamp: 75pcs ∅10 super bright LED chip, red 25pcs,
green 25pcs,blue 25pcs
Power consumption :40W
Control model : DMX512 control model, automate
program model,.sound control model., master/slave
control model
DMX channels: 7
Net weight: 1kg Gross weight: 1.3kg
Packing size: 16×16×27cm

支架
Stands



单横梁灯架(DD034)
高(High):1.6m-2.0m
顶宽(Top wide):0.84m
材料(Material):铁(Iron)



双层连体灯架(DD035)
高(High):2.5m
顶宽(Top wide):3.8m
材料(Material):铁(Iron)



带托盘灯架(DD036)
高(High):1.5m-2.0m
材料(Material):铁(Iron)



双横梁灯架(DD037)
高(High):1.9m-2.2m
顶宽(Top wide):1.2m
材料(Material):铁(Iron)



连体灯架(DD038)
高(High):2.5m
顶宽(Top wide):3.0m
材料(Material):铁 (Iron)



两用灯架(DD045)
高(High):1.6m-2.0m
顶宽(Top wide):0.84m
材料(Material):铁(Iron)

挂钩
Clamps



铝半月钩(DD028)
最大负荷(Max Load):500Kg
适合口径(Available Pipe):52mm



铝活动半月钩(DD044)
最大负荷(Max Load):500Kg
适合口径(Available Pipe):52mm



铝垂直半月钩(DD047)
最大负荷(Max Load):500Kg
适合口径(Available Pipe):52mm



铝快速挂钩(DD048)
最大负荷(Max Load):200Kg
适合口径(Available Pipe):52mm



小铝钩(DD049)
最大负荷(Max Load):40Kg
适合口径(Available Pipe):40-60mm



铸铁钩(DD033)
最大负荷(Max Load):40Kg
适合口径(Available Pipe):40-60mm



7字铁钩(DD046)
最大负荷(Max Load):15Kg
适合口径(Available Pipe):40-60mm



小铁钩(DD032)
最大负荷(Max Load):8Kg
适合口径(Available Pipe):25-40mm

遮光叶
Barndoors



冷光变焦聚光灯遮叶
(Dd180)



高效柔光灯遮叶
(Dd200)



冷回灯遮叶
(Dd330)

索光圈
英文



索光圈
(DD5-80330)

保险链
Safety Cable



Ø2保险链(DD039)
最大负荷(Max Load):10Kg
规格(Available Pipe):2×80mm



Ø3保险链(DD040)
最大负荷(Max Load):20Kg
规格(Available Pipe):3×80mm



Ø4保险链(DD041)
最大负荷(Max Load):50Kg
规格(Available Pipe):4×80mm



Ø5保险链(DD042)
最大负荷(Max Load):60Kg
规格(Available Pipe):5×80mm

色纸
Filter



光源
Lamps



灯座
Socket



G15灯座
(DDG15)



半反泡灯座
(DDGℓ40)



G22灯座
(DDG22)

接插件
Connector




10A接插件(DD10A)



40A接插件(DD40A)


镜片
Lens



ℓ180水纹镜片
(DDJ180)



ℓ180(MFL)镜片
(DDJ180VNSP)



ℓ180(WFL)镜片
(DDJ180NSP)



ℓ180(NSP)镜片
(DDJ180MFL)



ℓ180(VNSP)镜片
(DDJ180WFL)




ℓ200光学透镜
(DDT200)



ℓ165光学透镜
DDT165)



ℓ100光学透镜
(DDT100)



ℓ200螺纹镜
(DDJ200)



ℓ200四环聚光镜
(DDS200)

反光碗
Reflector



ℓ400反光碗
(DDW400)



ℓ330反光碗
(DDW330)



ℓ180反光碗
(DDW180)



ℓ150反光碗
(DDW150)



ℓ90反光碗
(DDW90)

