www. dd-lite. com
www.dundilight.com



DUNDI

2014-2015

DunDi®
敦帝灯光
DUNDI LIGHT



广州敦帝舞台设备有限公司

Guangzhou Dundi Stage Equipment Co.,Ltd.









GuangZhou DunDi Electric Stage Lighting Equipment Factory is specially engaged in R&D,manufacture,sale,installation,technical consulting and after-sales service of Theatre,Stage and Dancehall lighting equipment.
Our products have been welcomed by the domestic and international since its reliable quality、reasonable price and excellent after-sales service.
We always adhere to the operation philosophy of "Being based on credit","Quality first","Continuous innovation".With precise and professional spirit,we regulate each step.We won the agreement and support of the home and the abroad through its effort and strives for perfection work manner.
Nowadays,DunDi is focused on the design of new products with its unique function and configuration,which lead DunDi into special way in the lighting line.
We eager for customer's inquiry and technical communication,and hope you give us your valuable suggestions.We will,with more modest attitude,more professional view and more perfect service philosophy,meet the demand of each customer.
We will do better!

广州敦帝舞台灯光设备厂是一家专业从事剧院、舞台、舞厅配套灯光设备的研究开发、生产、销售、安装、技术咨询和售后服务于一体的厂家。

本厂产品以可靠的性能、实在的价格、优质的服务,不但在国内市场占有一席之地,还远销国外几十个国家。

我们始终秉承“诚信为本、质量第一、自主创新”的经营理念。以严谨的专业精神，规范每一个细节的运作。经过不懈的努力与精益求精的工作态度，赢得了国内外客户的赞誉和支持。


今后，敦帝还将不断以独特的思想，开发出具有独特功能和外观的新产品，使敦帝在此行业走出独特的一片天。

殷切的期盼新老客户前来咨询和技术交流，并能对我们厂的产品提出你宝贵的意见和建议.我们将以更努力谦虚的态度、更专业的眼光、更完善的服务来配合每一位顾客的需求。


我们会尽量做得更好!


SCENE OF EXHIBITION
展 会 现 场




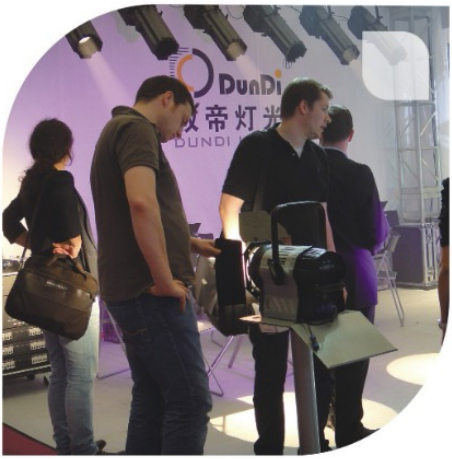






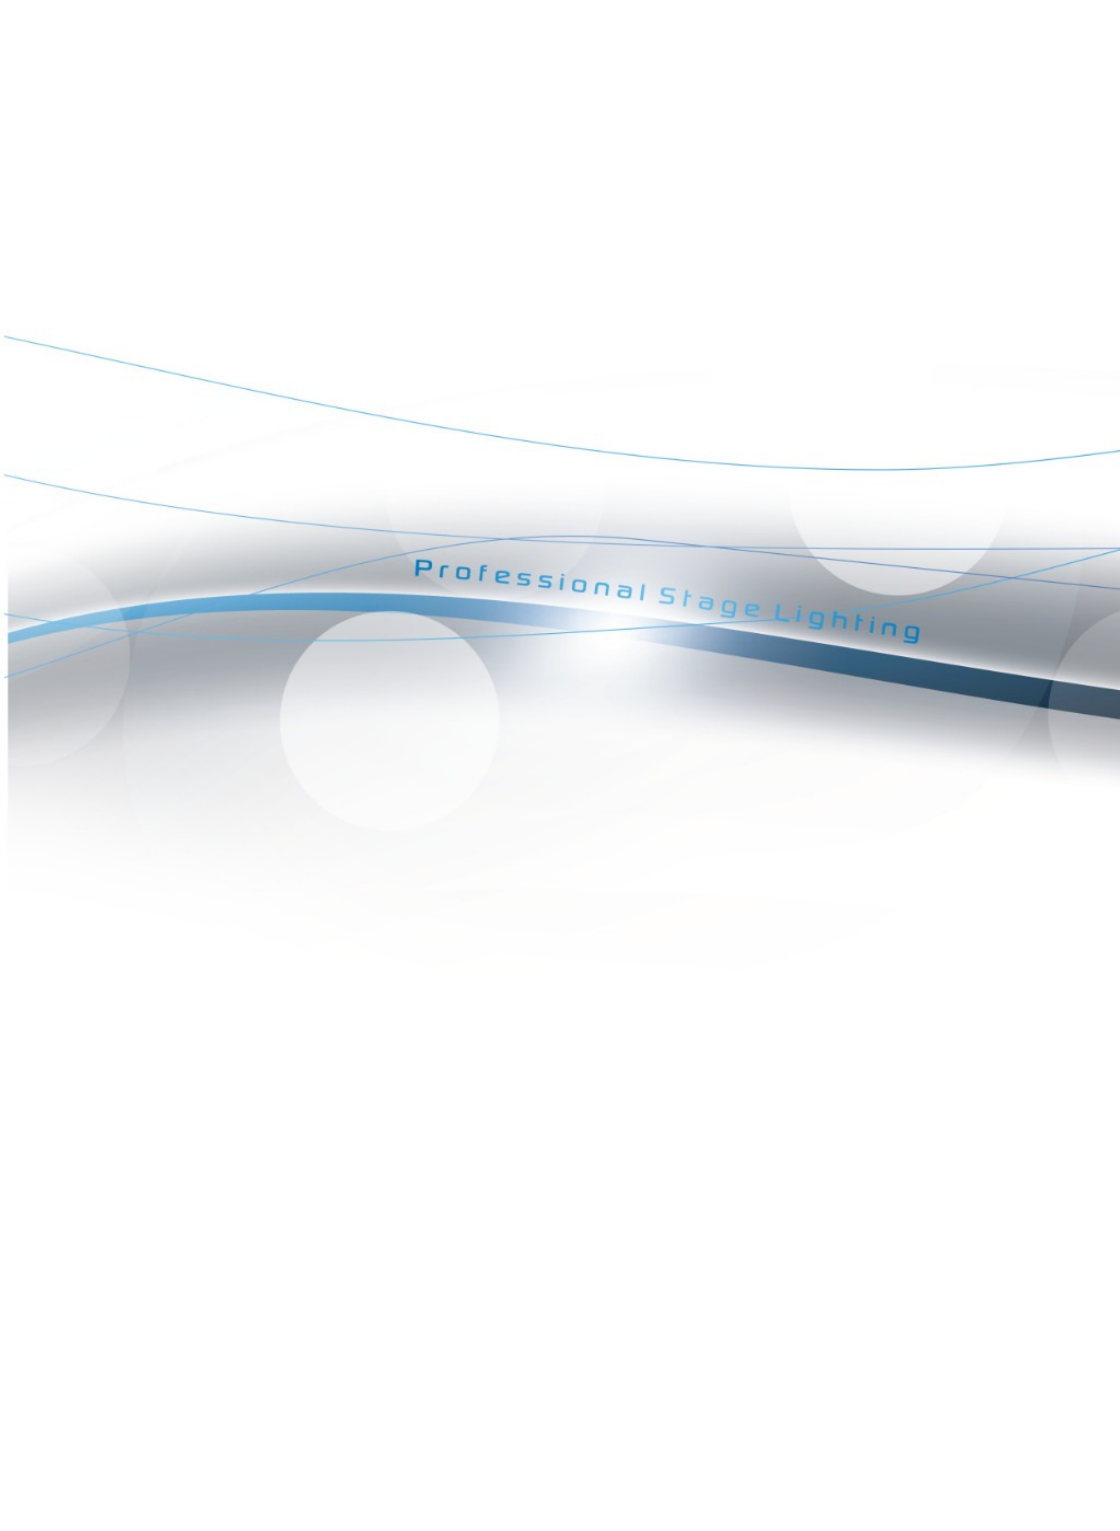
Professional Stage Lighting

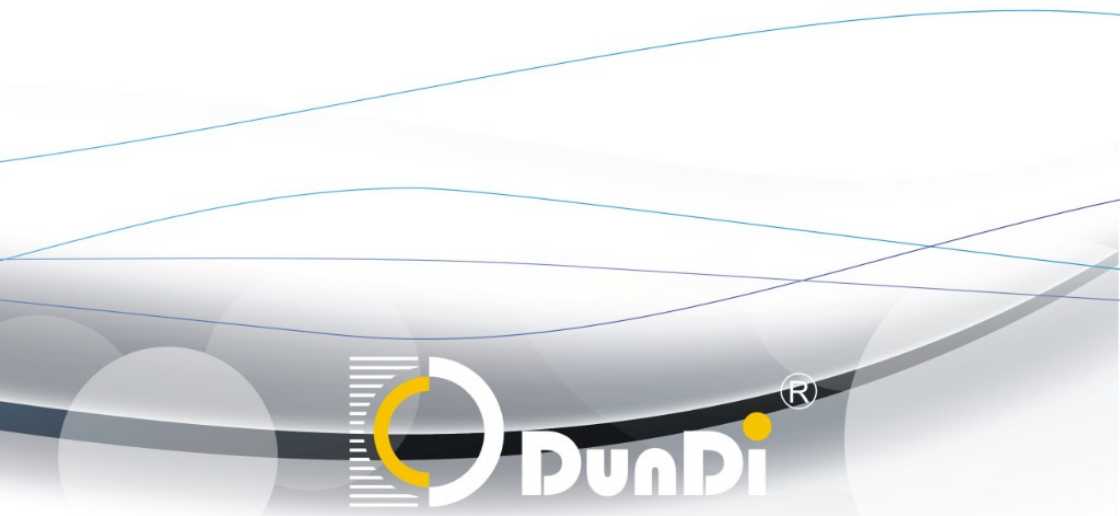
DunDi
®

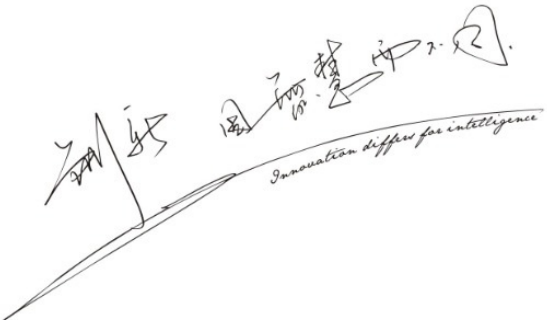
Innovation differs for intelligence

DUNDI LIGHTING



1-2
LED follow spot light Series
LED追光灯系列



3-4
LED Spotlight Series
LED聚光灯系列



5-8
LED profile light Series
LED成像灯系列



9-10
LED moving head light Series
LED摇头灯系列



11-14
Coolbeam zoom spotlinght Series
冷光成像灯系列



15-16
Coolbeam Zooming Spotlinght Series
冷光变焦聚光灯系列



17-18
Coolbeam Par Cans Series
冷光筒灯系列



19-20
Floodlight Series
泛光灯系列




















21
Sky and land row soft light Series
天地排柔光灯系列



22
Blind light Series
观众灯系列



23
Stage lighting Series
舞台灯系列



24
Three Basic Color Light Series
三基色灯系列



25
Signal Distributor Series
信号扩大器系列

26
Power Supply Pack Series
电源箱系列



27-28
Direct power supply distribution Series
直通电源箱系列



29
Accessories Series
舞台配套系列



- 该产品光学、结构、软件都由国际顶级工程师设计.
- 光源采用进口LED光源，寿命长、光效高.
- 光源散热采用纯铝特殊加工成型的散热器，导热系数是普通铝材2.5倍.
- 整灯操作运行系统采用了30多个轴承和26个齿轮组成。使操作特别顺畅，并可在灯体两边随意操作.
- 换色架设计安装在灯体内，色片采用镀膜玻璃。色纯光效高，换色操作采用推杆式设计，操作简便.
- 更换图案片采用手按自动出仓盒方式，非常方便.
- 灯体采用铝合金材料组成，使安装操作轻巧方便.
- 支架采用手摇升降支架，配有锥形轴承.使操作更平稳顺畅.

- This product's optical, construction, software design by international class engineer designers.
- Lamp source adopt imported LED with durable use life, highly light effective.
- Using pure aluminum special machine-shape radiator for the lamp source, thermal conductivity is 2.5 times of the normal aluminum.
- The whole light operation system is combined by more than thirty pcs bearings and 26 gears , which make the operation very smooth even can be operated by the two sides easily .
- Color stand designed inside, color sheet adopt coating film glass, color pure highly light effect , pusher design on color change, simple operate .
- Hand press auto deliver out gobo box to change gobo, easy operation.
- Light housing is aluminum alloy material combined so that the installation operation lightly and convenient.
- The stand is hand wagged model match with taper shape gear , which make the operation smooth and steady.




FS-A LED 360W 追光灯

额定电压:AC100-240V/50-60HZ
光源:进口LED
光源功率:360W
总功率:460W
色温:6500K
调焦范围:4.5-14°
操作方式:手动
外型尺寸:125×33.5×28cm
净重:灯具29kg 支架8.5kg

FS-A LED 360W follow spot light

Voltage: AC100-240V/50-60HZ
Light source: imported LEDs
Lamp power: 360W
Consumption: 460W
Color temperature: 6500K
Zooming scale: 4.5-14°
Operation model: manual
Inner size: 125×33.5×28cm
Net weight: light : 29kg stand:8.5kg





- 该产品光学、结构、软件都由国际顶级工程师设计.
- 光源采用进口LED光源，寿命长、光效高.
- 光源散热采用纯铝特殊加工成型的散热器，导热系数是普通铝材2.5倍.
- 灯体采用铝合金材料组成，使安装操作轻巧方便.
- 支架采用手摇升降支架，使操作更平稳顺畅.

- This product's optical, construction, software design by international class engineer designers.
- Lamp source adopt imported LED with durable use life, highly light effective.
- Using pure aluminum special machine-shape radiator for the lamp source, thermal conductivity is 2.5 times of the normal aluminum.
- Light housing is aluminum alloy material combined so that the installation operation lightly and convenient.
- The stand is hand wagged model , which make the operation smooth and steady.

FS-B LED 220W 追光灯

额定电压:AC100-240V/50-60HZ
光源:进口LED
光源功率:200W
总功率:280W
色温:6500K或3200K
调焦范围:11-18°
操作方式:手动
外型尺寸:84×29×28cm
净重:灯具13kg 支架8.5kg


FS-B LED 220W follow spot light

Voltage: AC100-240V/50-60HZ
Light source: imported LEDs
Lamp power: 200W
Consumption: 280W
Color temperature: 6500K or 3200K
Zooming scale:11-18°
Operation model: manual
Inner size: 84×29×28cm
Net weight: light : 13kg stand:8.5kg

此系列产品已申请多项专利，仿冒必究!
This products have applied numbers of patent, imitated must be accountability!

CE



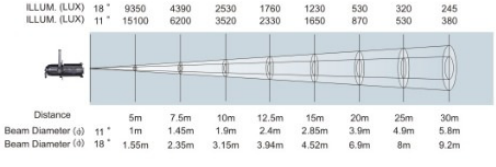



- 该产品光学、结构、软件都由国际顶级工程师设计.
- 光源采用进口LED光源，寿命长、光效高.
- 光源散热采用纯铝特殊加工成型的散热器，导热系数是普通铝材2.5倍，采用超静音风扇.
- 灯体采用铝合金材料组成，使安装操作轻巧方便.
- **特意说明：**
  此款产品对不同场所需求，色温、显示指数、亮度、调焦方式、控制方式、灯体颜色等，可根据客户要求生产.
  产品输入电压可多台相互相串，相串数量每组最多8台.

- This product's optical, construction, software design by international class engineer designers.
- Lamp source adopt imported LED with durable use life, highly light effective.
- Using pure aluminum special machine-shape radiator for the lamp source, thermal conductivity is 2.5 times of the normal aluminum. Adopting super mute fan.
- Light housing is aluminum alloy material combined so that the installation operation lightly and convenient.
- **Special Explain:**
  According to different occasion requires, the color temperature, Color rendering index, brightness, housing color etc that can be custom made for different customers .
  Product input voltage can be in series with several units, it can be in series 8 units most.

此系列产品已申请多项专利，仿冒必究！
This products have applied numbers of patent, imitated must be accountability!








ZS-W LED 200W 变焦聚光灯

额定电压:AC100-240V/50-60HZ
光源:进口LED
光源功率:200W
总功率:230W
色温:6500K或3200K
显色指数:6500K(72%或80%)，3200K(82%或95%)
控制信号:DMX
控制通道:3通道
调焦范围:18-65°
调焦方式:DMX或手动
内尺寸:46×29×27cm
外尺寸:53.5×34.5×33.5cm
净重:8.5kg　毛重:10.5kg

ZS-W LED 200W Zoom Spotlight


Voltage: AC100-240V/50-60HZ
Light source: imported LEDs
Lamp power: 200W
Consumption: 230W
CCT: 6500K or 3200K
CRI: 6500K (72% or 80%), 3200K (82% or 95%)
Control model: DMX
Channels : 3 CH
Zooming scale: 18-65°
Zooming model: DMX or manual
Inner size: 46×29×27cm
Packing size: 53.5×34.5×33.5cm
Net weight: 8.5kg　Gross Weight : 10.5kg

ILLUM.(LUX) 65° (6500K)	860	490	320	220	160
ILLUM.(LUX) 65° (3200K)	570	325	210	146	105
ILLUM.(LUX) 18° (6500K)	5250	2580	1360	890	615
ILLUM.(LUX) 18° (3200K)	3465	1720	910	590	410



Distance	5m	7.5m	10m	12.5m	15m
Beam Diameter (ϕ) 18°	1.3m	2.1m	2.8m	3.45m	4m
Beam Diameter (ϕ) 65°	6.1m	8.5m	10.7m	13.2m	15.8m





B1	B2	H1	H2	L
190	300	270	415	400


ZS-U LED 300W 车展灯

额定电压: AC100-240V/50-60HZ
光源: 进口LED
光源功率: 320W
总功率: 360W
色温: 6500K或3200K
出光角度: 17°
内尺寸: 46×29×27cm
外尺寸: 53.5×34.5×33.5cm
净重: 8.5kg
毛重: 10.5kg


ZS-U LED 300W Car Show Light

Voltage: AC100-240V/50-60HZ
Light source: imported LEDs
Lamp power: 320W
Consumption: 360W
CCT: 6500K or 3200K
Beam angle:17°
Inner size: 46×29×27cm
Packing size: 53.5×34.5×33.5cm
Net weight: 8.5kg
Gross Weight : 10.5kg










L1	L2	H1	H2	H
430	300	300	415	415

DD-D020 金卤车展灯

额定电压: AC220V
光源: MSD575W
灯座: GY9.5
最高表面温度: <175°C
最高环境温度: <40°C
最小间隔距离: 0.4米
最小照射距离: 1.5米
净重: 11kg 毛重: 12.8kg
内尺寸: 54×31×23cm
包装尺寸: 60×37×29cm

DD-D020 Metal Coolbeam Car Show Light

Voltage: AC220V
Lamp: MSD575W
Socket: GY9.5
Max.Surface Temperature: <175°C
Max.Ambient Temperature: <40°C
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W: 11kg G.W: 12.8kg
Outline size: 54×31×23cm
Packing size: 60×37×29cm





B1	B2	H1	H2	H	L
225	310	225	510	225	325

- 该产品光学、结构、软件都由国际顶级工程师设计.
- 光源采用进口LED光源，寿命长、光效高.
- 光源散热采用纯铝特殊加工成型的散热器，导热系数是普通铝材2.5倍，采用超静音风扇.
- 灯体采用铝合金材料组成，使安装操作轻巧方便
- **特意说明：**
  此款产品对不同场所需求，色温、显示指数、亮度、灯体颜色等，可根据客户要求生产
  产品输入电压可多台相互相串，相串数量每组最多8台





ZS-A LED 10-20° 成像灯

额定电压:AC100-240V/50-60HZ
光源:进口LED
光源功率:200W
总功率:230W
色温:6500K或3200K
显色指数:6500K(72%或80%)，3200K(82%或95%)
控制信号:DMX
控制通道:1通道
调焦方式:手动
内尺寸:84×29×28cm
外尺寸:99×30.5×31.5cm
净重:13kg　毛重:15kg

ZS-A LED 10-20°profile light

Voltage: AC100-240V/50-60HZ
Light source: imported LEDs
Lamp power: 200W
Consumption: 230W
CCT: 6500K or 3200K
CRI: 6500K(72% or 80%) , 3200K (82% or 95%)
Control model: DMX
Channels : 1 CH
Zooming model: manual
Inner size: 84×29×28cm
Packing size: 99×30.5×31.5cm
Net weight: 13 kg　Gross weight: 15 kg






B1	B2	H1	H2	H	L
223	330	223	525	285	840



Beam 使用光斑效果



ILLUM. (LUX)	20° (3200K)	6380	3120	1760	1120	790
ILLUM. (LUX)	20° (6500K)	9350	4390	2530	1760	1230
ILLUM. (LUX)	10° (3200K)	8900	4200	2310	1540	1120
ILLUM. (LUX)	10° (6500K)	15100	6200	3520	2330	1650



Distance		5m	7.5m	10m	12.5m	15m
Beam Diameter (ϕ)	10°	1m	1.45m	1.9m	2.4m	2.85m
Beam Diameter (ϕ)	20°	1.55m	2.35m	3.15m	3.94m	4.52m

- This product's optical, construction, software design by international class engineer designers.
- Lamp source adopt imported LED with durable use life, highly light effective.
- Using pure aluminum special machine-shape radiator for the lamp source, thermal conductivity is 2.5 times of the normal aluminum. Adopting super mute fan.
- Light housing is aluminum alloy material combined so that the installation operation lightly and convenient.
- **Special Explain:**
  According to different occasion requires, the color temperature, Color rendering index, brightness, housing color etc that can be custom made for different customers .
  Product input voltage can be in series with several units, it can be in series 8 units most.

ZS-C LED 20-36° 成像灯

此系列产品已申请多项专利，仿冒必究！
This products have applied numbers of patent, imitated must be accountability!


CE

额定电压:AC100-240V/50-60HZ
光源:进口LED
光源功率:200W
总功率:230W
色温:6500K或3200K
显色指数:6500K(72%或80%)，3200K(82%或95%)
控制信号:DMX
控制通道:1通道
调焦方式:手动
内尺寸:71×29×28cm
外尺寸:86×30.5×31.5cm
净重:12kg 毛重:14kg




ZS-C LED 20-36°profile light

Voltage: AC100-240V/50-60HZ
Light source: imported LEDs
Lamp power: 200W
Consumption: 230W
CCT: 6500K or 3200K
CRI: 6500K(72% or 80%) , 3200K(82% or 95%)
Control model: DMX
Channels : 1 CH
Zooming model: manual
Inner size: 71×29×28cm
Packing size: 86×30.5×31.5cm
Net weight: 12 kg Gross Weight : 14kg

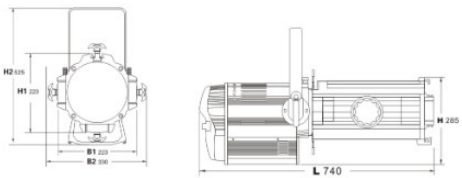

B1	B2	H1	H2	H	L
223	330	223	525	285	740

ILLUM.(LUX)	36°(3200K)	2230	1230	670	450	340
ILLUM.(LUX)	36°(6500K)	3630	1730	990	750	605
ILLUM.(LUX)	20°(3200K)	4070	1870	980	650	510
ILLUM.(LUX)	20°(6500K)	5830	2660	1620	1050	820



Distance		5m	7.5m	10m	12.5m	15m
Beam Diameter (ø)	20°	1.85m	2.75m	3.75m	4.8m	5.55m
Beam Diameter (ø)	36°	2.6m	3.65m	5.1m	6.3m	7.2m

Beam 使用光斑效果



- 该产品光学、结构、软件都由国际顶级工程师设计.
- 光源采用进口LED光源，寿命长、光效高.
- 光源散热采用纯铝特殊加工成型的散热器，导热系数是普通铝材2.5倍，采用超静音风扇.
- 灯体采用铝合金材料组成，使安装操作轻巧方便.
- **特意说明：**
  此款产品对不同场所需求，色温、显示指数、亮度、灯体颜色等，可根据客户要求生产.
  产品输入电压可多台相互相串，相串数量每组最多8台.




ZS-E LED 4.5° 成像灯


额定电压:AC100-240V/50-60HZ
光源:进口LED
光源功率:200W
总功率:230W
色温:6500K或3200K
显色指数:6500K(72%或80%)，3200K(82%或95%)
控制信号:DMX
控制通道:1通道
内尺寸:110×43×43cm
外尺寸:116×49×49cm
净重:12.5 kg　毛重:15.5kg


ZS-E LED 4.5°profile light

Voltage: AC100-240V/50-60HZ
Light source: imported LEDs
Lamp power: 200W
Consumption: 230W
CCT: 6500K or 3200K
CRI: 6500K(72% or 80%) , 3200K (82% or 95%)
Control model: DMX
Channels : 1CH
Inner size: 110×43×43cm
Packing size: 116×49×49cm
Net weight: 12.5kg　Gross Weight : 15.5kg





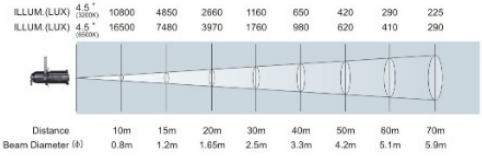

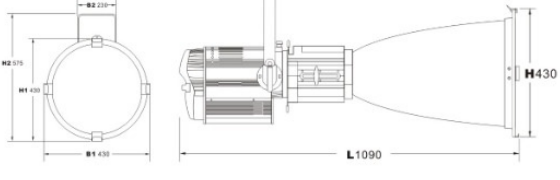

B1	B2	H1	H2	H	L
430	230	430	575	430	1090

- This product's optical, construction, software design by international class engineer designers.
- Lamp source adopt imported LED with durable use life, highly light effective.
- Using pure aluminum special machine-shape radiator for the lamp source, thermal conductivity is 2.5 times of the normal aluminum. Adopting super mute fan.
- Light housing is aluminum alloy material combined so that the installation operation lightly and convenient.
- **Special Explain:**
  According to different occasion requires, the color temperature, Color rendering index, brightness, housing color etc that can be custom made for different customers .
  Product input voltage can be in series with several units, it can be in series 8 units most.

ZS-F LED 8° 成像灯

额定电压:AC100-240V/50-60HZ
光源:进口LED
光源功率:200W
总功率:230W
色温:6500K或3200K
显色指数:6500K(72%或80%), 3200K(82%或95%)
控制信号:DMX
控制通道:1通道
内尺寸:86×31×31cm
外尺寸:89×40×40cm
净重:11.5 kg 毛重:14.5 kg


ZS-F LED 8°profile light


Voltage: AC100-240V/50-60HZ
Light source: imported LEDs
Lamp power: 200W
Consumption: 230W
CCT: 6500K or 3200K
CRI: 6500K(72% or 80%) , 3200K (82% or 95%)
Control model: DMX
Channels : 1 CH
Inner size: 86×31×31cm
Packing size: 89×40×40cm
Net weight: 11.5 kg Gross weight: 14.5kg

此系列产品已申请多项专利，仿冒必究!
This products have applied numbers of patent, imitated must be accountability!


CE



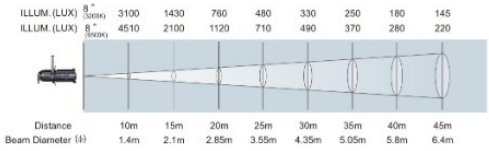



B1	B2	H1	H2	H	L
310	230	310	515	310	800

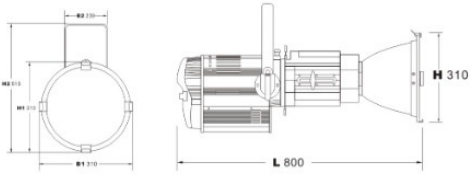

- 该产品光学、结构、软件、外观都由国际顶级工程师设计，产品质量稳定、亮度高、重量轻、体积小、外观美观.
- 该产品升级后亮度是原版本的2.5倍，增加了棱镜、棱镜自转、调焦3个功能通道、使产品功能更加完美，效果更佳.

- This product's optical, construction, software design by international class engineer designers, products quality stable, brightness, lightly, compact size, elegant look.
- This upgrade version brightness is 2.5 times of the previous , add functions of prism , prism rotation and zooming, which lead the product's function perfect, excellent effect.

此系列产品已申请多项专利，仿冒必究！
This products have applied numbers of patent, imitated must be accountability!

CE





Merlin-C100 LED 摇头灯(升级版)

额定电压:AC100-240V/50-60HZ
光源:进口LED 60W LED（白光）
总功率:100W
控制信号:DMX
控制通道:14通道
外开尺寸:25×25×32cm
包装尺寸:30×30×36cm
净重:4.7kg　毛重:6.4kg


Merlin-C100 LED moving head light (Upgrade version)

Voltage: AC100-240V/50-60HZ
Light source: imported 60W LED (white)
Consumption: 100W
Control model: DMX
Channels : 14 CH
Inner size: 25×25×32cm
Packing size: 30×30×36cm
Net weight: 4.7 kg　Gross weight: 6.4 kg



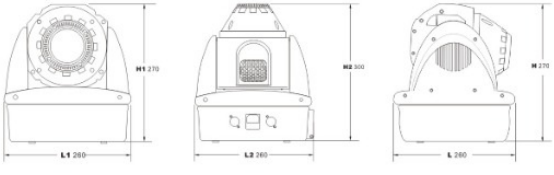

H1	H2	H	L1	L2	L
270	300	270	260	260	260

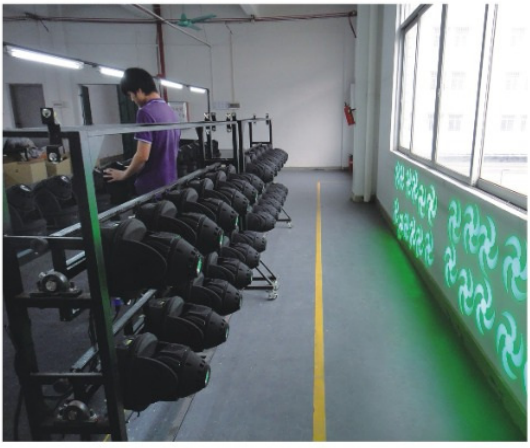










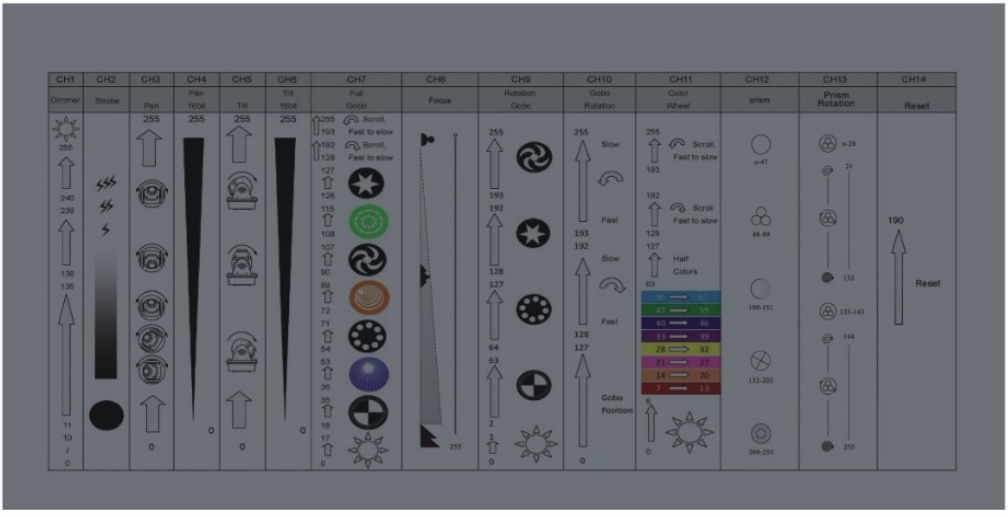


CH1
Dimmer
CH2
Strobe
CH3
Pan
CH4
Pan 16bit
CH5
Tilt
CH6
Tilt 16bit
CH7
Full Gobo
Scroll
Fast to slow
Scroll
Fast to slow
CH8
Focus
CH9
Rotation Gobo
CH10
Gobo Rotation
Slow
Fast
Slow
Fast
Gobo Position
CH11
Color Wheel
Scroll
Fast to slow
Scroll
Fast to slow
Half Colors
CH12
prism
CH13
Prism Rotation
CH14
Reset
Reset



- 冷光变焦成像灯系列是采用国际最新光学技术，使光效更均匀，在舞台上能营造出一种独特的灯光效果。
- 灯体采用铸铝结构。灯具散热效果特佳，使灯体温度降低２０％，增加了灯泡的使用寿命。
- 反光系统采用高效离子镀膜凌面椭球体反光碗及高效非球面透镜，将９５％以上的光源可见光向前反射，８５％以上的红外线及热量向后反射,亮度比普通2000W灯具还亮,射出光的温度比普通灯具低50%,增加了灯泡和换色器色纸使用寿命。
- 灯具独特的结构使镜片和灯泡更换以及产品清洁变得更加容易。灯具后部设计有光源快速交点定位联动机构，为光源准确快速地进入最佳位置提供一个方便快捷的途径。

- Coolbeam Zoom Spotlight series imported latest world optical technique,which produces even illumination,makes you feel in a unique and real scenes on the stage.
- Light body utilizes superior quality aluminum outer casting,excellent heat dissipation,lamp body temperature is 20% lower, therefore,the lamp life is longer.
- The reflection system uses the precise ion plating film reflection bowl and the precise aspherical plano convex lens,which reflects over 95% of the visible source light forward and over 85% of the infrared ray and heats backward. This result is lower bulb temperature and longer service life.The luminosity of which is higher than 2000W ordinary lamp,the temperature of the brightness is 50% lower which is good for the lamp and filter.
- Unique luminaire construction makes the maintenance and cleaning more easy. Adjust the lamp to the best position by focus system fast and effectively.



CE


DD-D001 15-30° 变焦成像灯

额定电压:AC220V
光源(灯座):HPL750/HPL575(G9.5)
或6995P 1000W(GX9.5)
最高表面温度:<200°C
最高环境温度:<40°C
最小间隔距离:0.4米
最小照射距离:1.5米
净重:8.5kg　毛重:10kg
内尺寸:78×24×24cm
包装尺寸:86×30.5×28cm


DD-D001 15-30° Zoom Spotlight

Voltage: AC220V
Lamp(Socket): HPL750/HPL575(G9.5)
or 6995P 1000W(GX9.5)
Max.Surface Temperature: <200°C
Max.Ambient Temperature: <40°C
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W: 8.5kg G.W: 10kg
Outline size: 78×24×24cm
Packing size: 86×30.5×28cm

30° 6995P1000W ILLUM. (LUX)	5860	3050	1670	1140	825
30° HPL750W ILLUM. (LUX)	3660	1860	1030	705	510
15° 6995P1000W ILLUM. (LUX)	9680	4630	2710	1750	1190
15° HPL750W ILLUM. (LUX)	5480	2440	1520	1060	720



Distance	5m	7.5m	10m	12.5m	15m
15° Beam Diameter (ø)	1.35m	2 m	2.65m	3.25m	3.95m
30° Beam Diameter (ø)	2.2m	3.2m	4.2m	5.1m	6.4m

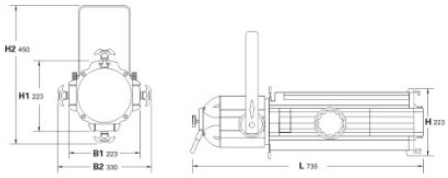

B1	B2	H1	H2	H	L
223	330	223	450	223	735

Beam 使用光斑效果



在安装或更换光源后有必要进行校位调节。
使用光源前后调节钮,顺时针方向扭动使灯座位置向前移动,逆时针方向扭动使灯座向后,使其在反光碗中的焦点位置,达到最佳光效。

After replacing the lamp it may be necessary to make adjustments.
To adjust the lamp's position in the reflector,turn the Forward Backward Adjusting knob.Turn it clockwise,the socket moves forward;turn it anticlockwise,the socket moves backward.Unlock the ring in the desired direction.

更换(安装)光源

独立的光源装置系统由定位螺丝锁紧,使光源在更换或安装时快速方便。

- 节省拆装时间
- 即使在高空也能方便操作

安全的性能

- 独立的光源装置系统上的安全链连接着灯体


6995P/1000W GX9.5


HPL/750W G9.5

Replace (assemble) lamp

Independent light source device system locked by oriented screw, which make lamp replace and assemble fast and easy .

- To save time for assembling and disassembling.
- Be available for operating on high altitude

Safe

- Providing safe cable to connect luminaires


DD-D002 25-50° 变焦成像灯

额定电压:AC220V
光源(灯座):HPL750/HPL575(G9.5)
或6995P 1000W(GX9.5)
最高表面温度:<200°C
最高环境温度:<40°C
最小间隔距离:0.4米
最小照射距离:1.5米
净重:8kg 毛重:9.5kg
内尺寸:67×24×24cm
包装尺寸:75×30.5×28cm




DD-D002 25-50° Zoom Spotlight

Voltage: AC220V
Lamp(Socket): HPL750/HPL575(G9.5)
or 6995P 1000W(GX9.5)
Max.Surface Temperature: <200°C
Max.Ambient Temperature: <40°C
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W: 8kg G.W: 9.5kg
Outline size: 67×24×24cm
Packing size: 75×30.5×28cm

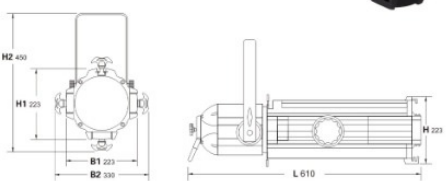

B1	B2	H1	H2	H	L
223	330	223	450	223	610

50° 6995P1000W ILLUM. (LUX)	1420	730	560	392	285
50° HPL750W ILLUM. (LUX)	1160	550	415	285	205
25° 6995P1000W ILLUM. (LUX)	3015	1360	860	625	540
25° HPL750W ILLUM. (LUX)	2480	1070	630	526	386



Distance	5m	7.5m	10m	12.5m	15m
25° Beam Diameter (ø)	2.6m	4 m	5.1m	6.6m	7.5m
50° Beam Diameter (ø)	4.45m	6.7m	8.1m	9.4m	10.7m







DD-D018 5° 定焦可柔光成像灯


DD-D018 5° Fixed Soft Spotlight

额定电压:AC220V	Voltage: AC220V
光源(灯座):HPL750/HPL575(G9.5)	Lamp(Socket): HPL750/HPL575(G9.5)
或6995P 1000W(GX9.5)	or 6995P 1000W(GX9.5)
最高表面温度:<200°C	Max.Surface Temperature: <200°C
最高环境温度:<40°C	Max.Ambient Temperature: <40°C
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:8.6kg 毛重:13.3kg	N.W: 8.6kg G.W: 13.3kg
内尺寸:103×41×41cm	Outline size: 103×41×41cm
包装尺寸:110.5×48.5×49cm	Packing size: 110.5×48.5×49cm

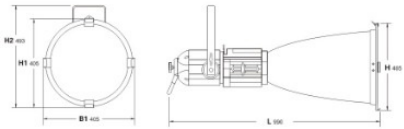

B1	H1	H2	H	L
405	405	493	405	990

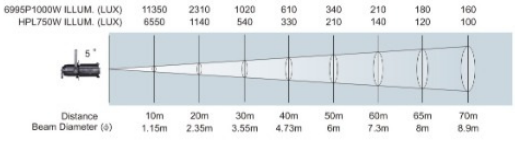




6995P/1000W


GX9.5


HPL/750W



G9.5


DD-D019 10° 定焦可柔光成像灯

DD-D019 10° Fixed Soft Spotlight




额定电压:AC220V	Voltage: AC220V
光源(灯座):HPL750/HPL575(G9.5)	Lamp(Socket): HPL750/HPL575(G9.5)
或6995P 1000W(GX9.5)	or 6995P 1000W(GX9.5)
最高表面温度:<200°C	Max.Surface Temperature: <200°C
最高环境温度:<40°C	Max.Ambient Temperature: <40°C
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:7.6kg 毛重:10kg	N.W: 7.6kg G.W: 10kg
内尺寸:80×31×31cm	Outline size: 80×31×31cm
包装尺寸:82.5×40×40cm	Packing size: 82.5×40×40cm

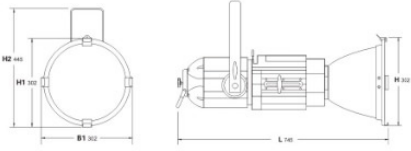

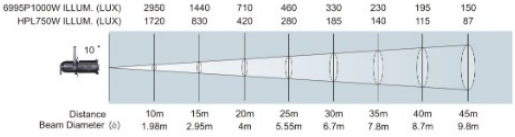

B1	H1	H2	H	L
302	302	445	405	745



DD-D003 19° DD-D004 26° DD-D005 36° 定焦可柔光成像灯


DD-D003 19° DD-D004 26° DD-D005 36° Fixed Soft Spotlight


额定电压:AC220V
光源(灯座):HPL750/HPL575(G9.5)
或6995P 1000W(GX9.5)
最高表面温度:<200°C
最高环境温度:<40°C
最小间隔距离:0.4米
最小照射距离:1.5米
净重:6.6kg 毛重:8.1kg
内尺寸:62.5×22×22cm
包装尺寸:71×30.5×28cm


Voltage: AC220V
Lamp(Socket): HPL750/HPL575(G9.5)
or 6995P 1000W(GX9.5)
Max.Surface Temperature: <200°C
Max.Ambient Temperature: <40°C
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W: 6.6kg G.W: 8.1kg
Outline size: 62.5×22×22cm
Packing size: 71×30.5×28cm



Beam 使用光斑效果



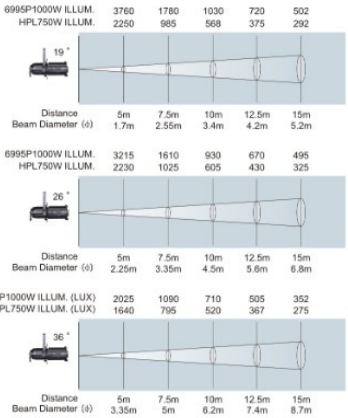

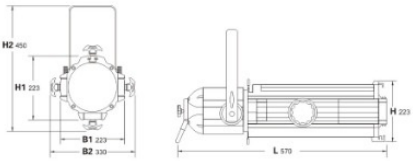

B1	B2	H1	H2	H	L
223	330	223	450	223	570

DD-D006 50° 定焦可柔光成像灯


DD-D006 50° Fixed Soft Spotlight


额定电压:AC220V
光源(灯座):HPL750/HPL575(G9.5)
或6995P 1000W(GX9.5)
最高表面温度:<200°C
最高环境温度:<40°C
最小间隔距离:0.4米
最小照射距离:1.5米
净重:6.6kg 毛重:8.1kg
内尺寸:62.5×22×22cm
包装尺寸:63.8×30.5×28cm


Voltage: AC220V
Lamp(Socket): HPL750/HPL575(G9.5)
or 6995P 1000W(GX9.5)
Max.Surface Temperature: <200°C
Max.Ambient Temperature: <40°C
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W: 6.6kg G.W: 8.1kg
Outline size: 62.5×22×22cm
Packing size: 63.8×30.5×28cm



Beam 使用光斑效果





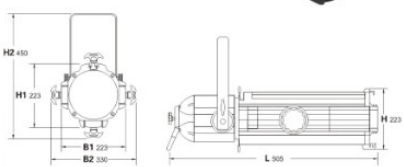

B1	B2	H1	H2	H	L
223	330	223	450	223	520


灯体外壳采用精致的铝合金压铸工艺,散热效果极佳.光束角度可在 25° -43° 之间随意调节,达到不同角度效果.反光碗采用高效离子镀膜凌面椭球体反光碗,射出的光比同类产品的温度降低40%,使灯泡寿命延长。其亮度也比同类产品亮30%,后面带有齿轮组合调整灯座前后移动,可使光源与反光碗平行前后进行调整焦点,使光斑更加均匀。


Light body utilizes superior quality aluminum outer casting,excellent heat dissipation.Beam angle range from 25° to 43° adjustable.Reflection system uses the precise ion plating film reflection bowl and the precise aspherical plano convex lens. The temperature of brightness is 40% lower compare with the familiar power ordinary lamp,longer the lamp life,it has duplex gear at the back of the lamp to adjust the lamp's position in the reflector,turn the Forward Backward Adjusting knob,moving the ring in the desired direction to get better effect.




6995P/1000W GX9.5



HPL/750W G9.5





B1	B2	H1	H2	H	L
225	290	225	353	225	325

6995P1000W 43°	ILLUM. (LUX)	1540	1035	705	578	435
6995P1000W 25°	ILLUM. (LUX)	5600	3237	2375	1795	1070
HPL750W 43°	ILLUM. (LUX)	1120	690	465	385	292
HPL750W 25°	ILLUM. (LUX)	3360	1950	1430	1080	695



Distance		5m	6.5m	8m	9.5m	12m
Beam Diameter (ϕ)	25°	1.7m	2.15m	2.76m	3.25m	4.3m
Beam Diameter (ϕ)	43°	3.65m	4.9m	6.1m	7.2m	8.45m

DD-D007 冷光变焦聚光灯（25°-43°）

DD-D007 Coolbeam Zooming Spotlight

额定电压:AC220V
光源(灯座):HPL750/HPL575(G9.5)
或6995P 1000W(GX9.5)
最高表面温度:<200°C
最高环境温度:<40°C
最小间隔距离:0.4米
最小照射距离:1.5米
净重:4kg 毛重:5kg
内尺寸:24×23×38.5cm
包装尺寸:25×24×40cm

Voltage: AC220V
Lamp(Socket): HPL750/HPL575(G9.5)
or 6995P 1000W(GX9.5)
Max.Surface Temperature: <200°C
Max.Ambient Temperature: <40°C
Min.Safe Interval:0.4m
Min.Throw Distance:1.5m
N.W: 4kg G.W: 5kg
Outline size: 24×23×38.5cm
Packing size: 25×24×40cm

DD-D008 冷光(MFL)聚光灯(21°×34°)

DD-D008 Coolbeam(MFL) Spotlight

额定电压:AC220V	Voltage: AC220V
光源(灯座):HPL750/HPL575(G9.5)	Lamp(Socket): HPL750/HPL575(G9.5)
或6995P 1000W(GX9.5)	or 6995P 1000W(GX9.5)
最高表面温度:<200°C	Max.Surface Temperature: <200°C
最高环境温度:<40°C	Max.Ambient Temperature: <40°C
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:4kg 毛重:5kg	N.W: 4kg G.W: 5kg
内尺寸:24×23×38.5cm	Outline size: 24×23×38.5cm
包装尺寸:25×24×40cm	Packing size: 25×24×40cm



DD-D009 冷光(WFL)聚光灯(30°×51°)

DD-D009 Coolbeam(WFL) Spotlight

额定电压:AC220V	Voltage: AC220V
光源(灯座):HPL750/HPL575(G9.5)	Lamp(Socket): HPL750/HPL575(G9.5)
或6995P 1000W(GX9.5)	or 6995P 1000W(GX9.5)
最高表面温度:<200°C	Max.Surface Temperature: <200°C
最高环境温度:<40°C	Max.Ambient Temperature: <40°C
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:4kg 毛重:5kg	N.W: 4kg G.W: 5kg
内尺寸:24×23×38.5cm	Outline size: 24×23×38.5cm
包装尺寸:25×24×40cm	Packing size: 25×24×40cm



DD-D010 冷光(NSP)聚光灯(19°)

DD-D010 Coolbeam(NSP) Spotlight

额定电压:AC220V	Voltage: AC220V
光源(灯座):HPL750/HPL575(G9.5)	Lamp(Socket): HPL750/HPL575(G9.5)
或6995P 1000W(GX9.5)	or 6995P 1000W(GX9.5)
最高表面温度:<200°C	Max.Surface Temperature: <200°C
最高环境温度:<40°C	Max.Ambient Temperature: <40°C
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:4kg 毛重:5kg	N.W: 4kg G.W: 5kg
内尺寸:24×23×38.5cm	Outline size: 24×23×38.5cm
包装尺寸:25×24×40cm	Packing size: 25×24×40cm



DD-D011 冷光(VNSP)聚光灯(15°)

DD-D011 Coolbeam(VNSP) Spotlight

额定电压:AC220V	Voltage: AC220V
光源(灯座):HPL750/HPL575(G9.5)	Lamp(Socket): HPL750/HPL575(G9.5)
或6995P 1000W(GX9.5)	or 6995P 1000W(GX9.5)
最高表面温度:<200°C	Max.Surface Temperature: <200°C
最高环境温度:<40°C	Max.Ambient Temperature: <40°C
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:4kg 毛重:5kg	N.W: 4kg G.W: 5kg
内尺寸:24×23×38.5cm	Outline size: 24×23×38.5cm
包装尺寸:25×24×40cm	Packing size: 25×24×40cm




灯体采用铝合金组成,散热效果好。反光碗采用透红外耐高温介质膜冷光束反光碗,射出的光比一般筒灯温度降低50%。温度低可使灯泡和换色器色纸寿命更长。575W比一般1000W筒灯亮度还亮.后面带有齿轮组合调整灯座前后移动,可使光源与反光碗平行前后进行调整焦点,使光斑更均匀。

Light body utilizes superior quality aluminum outer casting,excellent heat dissipation.,use infrared,unti-high temperature, coolbeam reflector. The temperature of brightness is 50% lower compare with the familiar power par cans,longer the lamp and filter life.575W's brightness is higher than ordinary par cans with 1000W.it has duplex gear at the back of the lamp to adjust the lamp's position in the reflector,turn the Forward Backward Adjusting knob,moving the ring in the desired direction to get better effect.





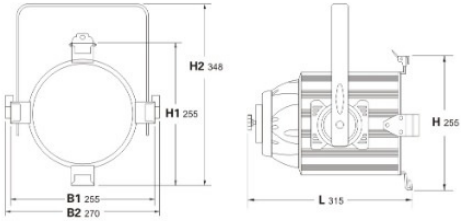

B1	B2	H1	H2	H	L
255	270	255	348	255	315

DD-D012 冷光(MFL)筒灯(21°×34°)

DD-D012 Coolbeam(MFL)Par Cans

额定电压:AC220V	Voltage: AC220V
光源(灯座):HPL750/HPL575(G9.5)	Lamp(Socket):HPL750/HPL575(G9.5)
或6995P 1000W(GX9.5)	or 6995P 1000W(GX9.5)
最高表面温度:<200°C	Max.Surface Temperature: <200°C
最高环境温度:<40°C	Max.Ambient Temperature: <40°C
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:3.2kg 毛重:4.2kg	N.W: 3.2kg G.W: 4.2kg
内尺寸:22.5×22×36.5cm	Outline size: 22.5×22×36.5cm
包装尺寸:23.5×23×38cm	Packing size: 23.5×23×38cm

DD-D013 冷光(WFL)筒灯(30°×51°)

DD-D013 Coolbeam(WFL)Par Cans

额定电压:AC220V	Voltage: AC220V
光源(灯座):HPL750/HPL575(G9.5)	Lamp(Socket): HPL750/HPL575(G9.5)
或6995P 1000W(GX9.5)	or 6995P 1000W(GX9.5)
最高表面温度:<200°C	Max.Surface Temperature: <200°C
最高环境温度:<40°C	Max.Ambient Temperature: <40°C
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:3.2kg 毛重:4.2kg	N.W: 3.2kg G.W: 4.2kg
内尺寸:22.5×22×36.5cm	Outline size: 22.5×22×36.5cm
包装尺寸:23.5×23×38cm	Packing size: 23.5×23×38cm



DD-D014 冷光(NSP)筒灯(19°)

DD-D014 Coolbeam(NSP)Par Cans

额定电压:AC220V	Voltage: AC220V
光源(灯座):HPL750/HPL575(G9.5)	Lamp(Socket): HPL750/HPL575(G9.5)
或6995P 1000W(GX9.5)	or 6995P 1000W(GX9.5)
最高表面温度:<200°C	Max.Surface Temperature: <200°C
最高环境温度:<40°C	Max.Ambient Temperature: <40°C
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:3.2kg 毛重:4.2kg	N.W: 3.2kg G.W: 4.2kg
内尺寸:22.5×22×36.5cm	Outline size: 22.5×22×36.5cm
包装尺寸:23.5×23×38cm	Packing size: 23.5×23×38cm




DD-D015 冷光(VNSP)筒灯(15°)

DD-D015 Coolbeam(VNSP)Par Cans

额定电压:AC220V	Voltage: AC220V
光源(灯座):HPL750/HPL575(G9.5)	Lamp(Socket): HPL750/HPL575(G9.5)
或6995P 1000W(GX9.5)	or 6995P 1000W(GX9.5)
最高表面温度:<200°C	Max.Surface Temperature: <200°C
最高环境温度:<40°C	Max.Ambient Temperature: <40°C
最小间隔距离:0.4米	Min.Safe Interval:0.4m
最小照射距离:1.5米	Min.Throw Distance:1.5m
净重:3.2kg 毛重:4.2kg	N.W: 3.2kg G.W: 4.2kg
内尺寸:22.5×22×36.5cm	Outline size: 22.5×22×36.5cm
包装尺寸:23.5×23×38cm	Packing size: 23.5×23×38cm



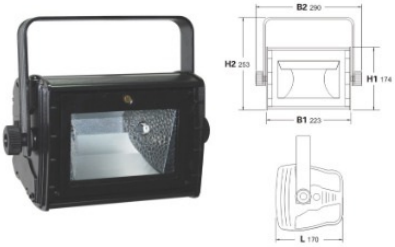


DD-D025 500泛光灯

DD-D025 500 floodlight

额定电压：220V/110V
光源：500W/800W双端卤钨灯管
灯座：R7S
最高表面温度：＜180℃
最高环境温度：＜40℃
最小间隔距离：0.4米
最小照射距离：0.4米
色温：3200K
净重：2.3kg 毛重：3kg
内尺寸：29.5×17×25cm
包装尺寸：30.5×18×26.5cm

Voltage: 220V/110V
Lamp:500W/800W double-end halogen tungsten tube
Socket:R7S
Max surface temperature: ＜180℃
Max ambient temperature: ＜40℃
Min safe interval:0.4m
Min throw distance:0.4m
Color temperature:3200k
Net weight:2.3kg Gross weight:3kg
Size: 29.5×17×25cm
Packing size: 30.5×18×26.5cm

B1	B2	H1	H2	L
223	290	174	253	170

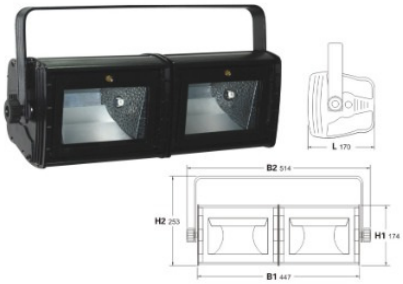


DD-D026 500×2泛光灯

DD-D026 500×2 floodlight

额定电压：220V/110V
光源：500W/800W双端卤钨灯管
灯座：R7S
最高表面温度：＜180℃
最高环境温度：＜40℃
最小间隔距离：0.4米
最小照射距离：0.4米
色温：3200K
净重：4.6kg 毛重：6kg
内尺寸：53×17×25cm
包装尺寸：(30.5×18×26.5cm)×2

Voltage: 220V/110V
Lamp:500W/800W double-end halogen tungsten tube
Socket:R7S
Max surface temperature: ＜180℃
Max ambient temperature: ＜40℃
Min safe interval:0.4m
Min throw distance:0.4m
Color temperature:3200k
Net weight:4.6 Gross weight:6kg
Size: 53×17×25cm
Packing size: (30.5×18×26.5cm)×2

B1	B2	H1	H2	L
447	514	174	253	170

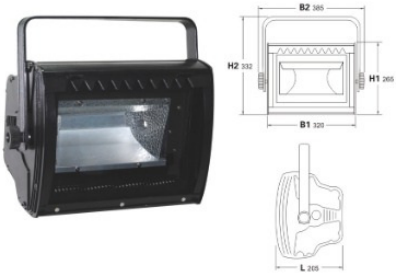


DD-D027 1250泛光灯

DD-D027 1250 floodlight

额定电压：220V/110V
光源：1250W双端卤钨灯管
灯座：R7S
最高表面温度：＜180℃
最高环境温度：＜40℃
最小间隔距离：0.4米
最小照射距离：0.4米
色温：3200K
净重：4.3kg 毛重：5kg
内尺寸：38.5×20.5×33.5cm
包装尺寸：39.5×21.5×35cm

Voltage: 220V/110V
Lamp: 1250W double-end halogen tungsten tube
Socket:R7S
Max surface temperature: ＜180℃
Max ambient temperature: ＜40℃
Min safe interval:0.4m
Min throw distance:0.4m
Color temperature:3200k
Net weight: 4.3kg Gross weight: 5kg
Size: 38.5×20.5×33.5cm
Packing size: 39.5×21.5×35cm

B1	B2	H1	H2	L
320	385	265	332	205

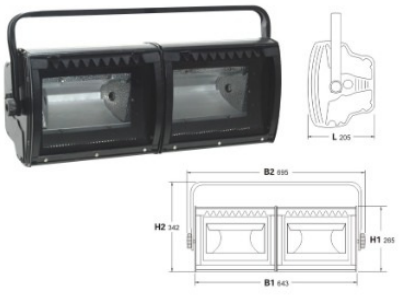

DD-D028 1250×2泛光灯

DD-D028 1250×2 floodlight

额定电压：220V/110V
光源：1250W双端卤钨灯管
灯座：R7S
最高表面温度：＜180℃
最高环境温度：＜40℃
最小间隔距离：0.4米
最小照射距离：0.4米
色温：3200K
净重：8.6kg 毛重：10kg
内尺寸：71×20.5×33.5cm
包装尺寸：(39.5×21.5×35cm)×2

Voltage: 220V/110V
Lamp: 1250W double-end halogen tungsten tube
Socket:R7S
Max surface temperature: ＜180℃
Max ambient temperature: ＜40℃
Min safe interval:0.4m
Min throw distance:0.4m
Color temperature:3200k
Net weight: 8.6 kg Gross weight: 10kg
Size: 71×20.5×33.5cm
Packing size: (39.5×21.5×35cm)×2

B1	B2	H1	H2	L
643	695	265	342	205


DD-D029 1250×4泛光灯

DD-D029 1250×4floodlight

额定电压：220V/110V
光源：1250W双端卤钨灯管
灯座：R7S
最高表面温度：＜180℃
最高环境温度：＜40℃
最小间隔距离：0.4米
最小照射距离：0.4米
色温：3200K
净重：17kg 毛重：19.8kg
内尺寸：73×20.5×62.5cm
包装尺寸：(39.5×21.5×35cm)×4

Voltage: 220V/110V
Lamp: 1250W double-end halogen tungsten tube
Socket:R7S
Max surface temperature: ＜180℃
Max ambient temperature: ＜40℃
Min safe interval:0.4m
Min throw distance:0.4m
Color temperature:3200k
Net weight:17kg Gross weight:19.8kg
Size: 73×20.5×62.5cm
Packing size: (39.5×21.5×35cm)×4

B1	B2	H1	H2	L
643	732	549	636	170

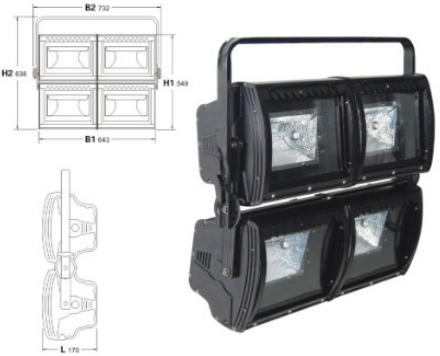


DD-D030 1250×4脚光灯

DD-D030 1250×4 floodlight

额定电压：220V/110V
光源：1250W双端卤钨灯管
灯座：R7S
最高表面温度：＜180℃
最高环境温度：＜40℃
最小间隔距离：0.4米
最小照射距离：0.4米
色温：3200K
净重：17kg 毛重：20kg
内尺寸：134×20.5×30cm
包装尺寸：(39.5×21.5×35cm)×4

Voltage: 220V/110V
Lamp: 1250W double-end halogen tungsten tube
Socket:R7S
Max surface temperature: ＜180℃
Max ambient temperature: ＜40℃
Min safe interval:0.4m
Min throw distance:0.4m
Color temperature:3200k
Net weight: 17kg Gross weight:20kg
Size: 134×20.5×30cm
Packing size: (39.5×21.5×35cm)×4

B1	B2	H1	H2	L1	L2
1280	1340	265	306	200	205

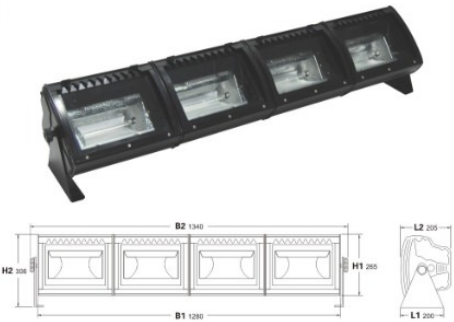


DD-D031 500×4脚光灯

DD-D031 500×4 floodlight


额定电压：220V/110V
光源：500W/800W双端卤钨灯管
灯座：R7S
最高表面温度：＜180℃
最高环境温度：＜40℃
最小间隔距离：0.4米
最小照射距离：0.4米
色温：3200K
净重：9.2kg 毛重：12kg
内尺寸：99×17×26cm
包装尺寸：(30.5×18×26.5cm)×4

Voltage: 220V/110V
Lamp: 500W/800W double-end halogen tungsten tube
Socket:R7S
Max surface temperature: ＜180℃
Max ambient temperature: ＜40℃
Min safe interval:0.4m
Min throw distance:0.4m
Color temperature:3200k
Net weight: 9.2kg Gross weight:12kg
Size: 99×17×26cm
Packing size: (30.5×18×26.5cm)×4

B1	B2	H1	H2	L1	L2
895	950	174	255	200	170

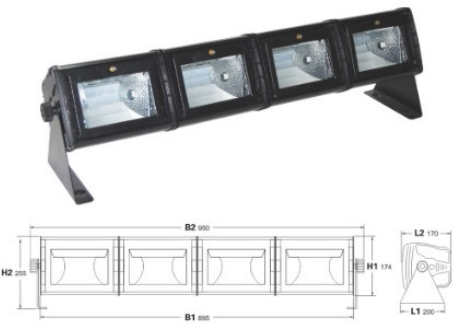





B	H1	H	L1	L
180	380	450	420	350


DD-A011 双反射天排柔光灯

DD-A011 Double Reflection Sky Row Soft Light

电压: 220V
频率: 50-60Hz
功率: 2000W
灯泡: 220V1000W / 220V1250W
220V2000W
色温: 3200K
包装尺寸: 46×43×19.5cm
净重: 6Kg 毛重: 6.8Kg

Voltage:220V
Frequency:50-60Hz
Power consumption:2000W
Bulb: 220V1000W / 220V1250W
220V2000W
Color temperature:3200K
Packing Size:46×43×19.5cm
N.W: 6Kg G.W: 6.8Kg





B	H1	H	L1	L
290	380	415	420	370


DD-A013 双反射地排柔光灯

DD-A013 Double Reflection Land Row Soft Light

电压: 220V
频率: 50-60Hz
功率: 2000W
灯泡: 220V1000W / 220V1250W
220V2000W
色温: 3200K
包装尺寸: 46×43×19.5mm
净重: 6Kg 毛重: 6.8Kg

Voltage:220V
Frequency:50-60Hz
Power consumption:2000W
Bulb: 220V1000W / 220V1250W
220V2000W
Color temperature:3200K
Packing Size:46×43×19.5cm
N.W: 6Kg G.W: 6.8Kg





B	H1	H	L1	L
250	280	375	502	462


DD-A007 带风机天排灯

DD-A007 Sky Row Light With Fun

电压: 220V
频率: 50-60Hz
功率: 2000W
灯泡: 220V1000W / 220V1250W
220V2000W
色温: 3200K
特点: 带两个直流风机散热，噪音特小。
包装尺寸: 50×27×46cm
净重: 5.5Kg
毛重: 6.5Kg

Voltage:220V
Frequency:50-60Hz
Power consumption:2000W
Bulb: 220V1000W / 220V1250W
220V2000W
Color temperature:3200K
Feature:with two funs dissipation
system,lowest noise.
Packing Size:50×27×46cm
N.W: 5.5Kg G.W: 6.5Kg





B	H1	H	L1	L
350	375	435	490	462


DD-A009 带风机地排灯

DD-A009 Land Row Light With Fun

电压: 220V
频率: 50-60Hz
功率: 2000W
灯泡: 220V1000W / 220V1250W
220V2000W
色温: 3200K
特点: 带两个直流风机散热，噪音特小。
包装尺寸: 50×27×46cm
净重: 5.5Kg 毛重: 6.5Kg

Voltage:220V
Frequency:50-60Hz
Power consumption:2000W
Bulb: 220V1000W / 220V1250W
220V2000W
Color temperature:3200K
Feature:with two funs dissipation
system,lowest noise.
Packing Size:50×27×46cm
N.W: 5.5Kg G.W: 6.5Kg





B	L	H1	H
220	440	130	310

DD-A012 天幕云灯

DD-A012 Flood Light

电压: 220V
频率: 50-60Hz
功率: 1000W
灯泡: 220V1000W
色温: 3200K
包装尺寸: 47×32×49cm(8台)
净重: 17Kg 毛重: 17.8Kg

Voltage:220V
Frequency:50-60Hz
Power consumption:1000W
Bulb: 220V1000W
Color temperature:3200K
Packing Size:47×32×49cm(8pcs)
N.W: 17Kg G.W:17.8Kg

观众灯特性

该泛光灯采用独特的灯阵组合设计,使舞台效果极具震憾力。
本灯具有重量轻,体积小,造型美观大方,铺光面积大,光质均匀等特点。广泛用于歌舞厅,舞台,电视演播厅和大型演唱会作为大面积泛光照明及增强场景效果使用,该灯具使用极其方便,并且可以组合成八头灯使用。

Specially disigned as an array of lamps


Light weight,compact size,pleasant appearance.
Used for lighting vast spaces or high lighting night clubs,stages,TV studios and large-scale vocal concerts.Easy handling,fabricating into "eight-head" blind light for special purposes.

DD-A068 八眼观众灯

DD-A068 Blind Light 8

电压: 220V	Voltage:220V
频率: 50-60Hz	Frequency:50-60Hz
功率: 5200W	Power consumption:5200W
灯泡: Q650Par36 120V650W×8	Bulb:Q650Par36 120V650W×8
色温: 3200K	Color temperature:3200K
包装尺寸: 77×46×16cm	Packing Size:77×46×16cm
净重: 7.5Kg 毛重: 8.5Kg	N.W:7.5Kg G.W: 8.5Kg

B	H1	H	L1	L
150	400	720	460	380






DD-A066 四眼观众灯

DD-A066 Blind Light 4

电压: 220V	Voltage:220V
频率: 50-60Hz	Frequency:50-60Hz
功率: 2600W	Power consumption:2600W
灯泡: Q650Par36 120V650W×4	Bulb:Q650Par36 120V650W×4
色温: 3200K	Color temperature:3200K
包装尺寸: 45.6×15.5×42cm	Packing Size:45.6×15.5×42cm
净重: 6Kg 毛重: 6.5Kg	N.W: 6Kg G.W: 6.5Kg

B	H1	H	L1	L
150	230	350	460	380






DD-A067 两眼观众灯

DD-A067 Blind Light 2


电压: 220V	Voltage:220V
频率: 50-60Hz	Frequency:50-60Hz
功率: 1300W	Power consumption:1300W
灯泡: Q650Par36 120V650W×2	Bulb:Q650Par36 120V650W×2
色温: 3200K	Color temperature:3200K
包装尺寸: 32×23×10cm	Packing size:32×23×10cm
净重:2.2Kg 毛重:3Kg	N.W: 2.2Kg G.W: 3Kg

B	H1	H	L1	L
85	150	190	310	250









B1	B2	H1	H2	L	H
365	445	440	530	350	330

DD-A002 高效电影回光灯
DD-A002 Film Cyclight

DD-A004 高效影视冷回光灯
DD-A004 Coolbeam Film Cyclight


2000W冷光束回光灯，采用透红外，耐高温，介质膜冷光束反光碗，透光率高，射出的光比同类回光灯的温度低40%，温度的降低使灯泡寿命更长，工作温度的改善使换色器特别是色纸的寿命更长。
2000W coolbeam cyclight use infared,unti-high temperature,coolbeam reflector, with function of high brightness,homogeneous faculty,temperature of the brightness is lower 40% compare with the other cyclight ,these prolong the work life of the lamp and the color filter.

电源: 220V/50Hz	Voltage:220V/50Hz
光源: 220V1000W/220V2000W	Lamp:220V1000W/220V2000W
灯座: G15 或 G22	Socket:G15 or G22
色温: 3200K	Color temperature:3200K
反光碗: ∅330mm	Reflector: ∅ 330mm
包装尺寸: 50×40×50cm	Packing size: 50×40×50cm
净重: 8Kg 毛重: 9Kg	N.W: 8Kg G.W: 9Kg

舞台柔光灯.聚光灯特性:
Features of stage soft light and spot light:

该系列灯具广泛适用于电影、剧场、舞台的顶光、面光、耳光、柱光等场合使用，也适用于舞台、演播室中为人物、布景、道具照明。本系列灯具采用高透光率、耐高温透镜，独特的反射系统，使其在同等条件下，照度更高，光斑更均匀，效果更好。灯体系采用优质铝合金结构，外观完美，散热好，温度低、强度高、安全性能好，经久耐用。
Widely used for the situations of stage,theatre,film top light, front light,side light,athwart light.it's a strong spot equipment.Suit to personality, project,prop,light.With effective lens and anti-high temperature,it's provide smooth illumination,better effect.it's use high quality aluminum alloy, beautiful appearance,excellent cooling effect.high brightness,safe,durable.






DD-A008 高效柔光灯
DD-A008 Soft Light

电源: 220V/50Hz	Voltage:220V/50Hz
光源: 220V1000W/220V2000W	Lamp:220V1000W/220V2000W
灯座: G15 或 G22	Socket:G15 or G22
色温: 3200K	Color temperature:3200K
反光碗: ∅90mm	Reflector: ∅ 90mm
包装尺寸: 43×40×39cm	Packing size:43×40×39cm
净重: 6Kg 毛重:7.2Kg	N.W: 6Kg G.W: 7.2Kg

B1	B2	H1	H2	L	H
265	335	330	465	375	205





DD-A010 高效聚光灯
DD-A010 Big Spot Light

电源: 220V/50Hz	Voltage:220V/50Hz
光源: 220V1000W/220V2000W	Lamp:220V1000W/220V2000W
灯座: G15 或 G22	Socket:G15 or G22
色温: 3200K	Color temperature:3200K
反光碗: ∅90mm	Reflector: ∅ 90mm
包装尺寸: 43×40×39cm	Packing size: 43×40×39cm
净重: 7Kg 毛重: 8.2Kg	N.W: 7Kg G.W: 8.2Kg

B1	B2	H1	H2	L	H
265	335	330	465	375	205

512 调光三基色特性：

光线柔和,均匀,舒适,无辐射热;
具有高效率反光镜和遮扉,灯具光能利用率高;
灯管色再现性好,显色指数达85-95,可与卤钨灯配合使用;
性能可靠,安全,经久耐用;
操作简单,方便易用;
环境适应强,在各种环境下皆能可靠工作;
对视频,音频无干扰;
调光曲线特佳;
一个DMX通道;
可以用专用控盒控制;

512 Dimmer Three Basic Color Soft Light Features：


Smooth even illumination,no radiation heat;
Excellent reflector and Barndoors, with high utilizing rate;
Excellent light reappearing,85%-95%,any Tungster Halogen lamps acceptable;
Reliable,safe and durable;
Excellent environment adapt ability ensures reliable operation under different circumstances;
No interfere with vidio and audio
Excellent dimmer curve
One DMX channel
Exclusive console

DD-A014 55×6三基色

DD -A014 55×6 Three Basic Color Light

广泛适用于舞台,电影,多功能会议室,新闻演播室
Widely used for the situations of stage,film,multi-functions meeting room,News reporting hall.

电压:220V/50Hz	Voltage: 220V/50Hz
光源:55W灯管×6	Lamp: 55W tube×6
功率:330W	Power: 330W
净重: 13Kg 毛重: 16Kg	N.W: 13Kg G.W: 16Kg
外型尺寸: 66×46×16cm	Outline size: 66×46×16cm
包装尺寸: 76.3×49×21.5cm	Packing size: 76.3×49×21.5cm






B	H	L1	L2
160	660	770	970

DD-A016 55×4三基色

DD -A016 55×4 Three Basic Color Light

广泛适用于舞台,电影,多功能会议室,新闻演播室
Widely used for the situations of stage,film,multi-functions meeting room,News reporting hall.

电压:220V/50Hz	Voltage: 220V/50Hz
光源:55W灯管×4	Lamp: 55W tube×4
功率:220W	Power: 220W
净重: 8.7Kg 毛重: 10Kg	N.W: 8.7Kg G.W: 10Kg
外型尺寸: 66×33×16cm	Outline size: 66×33×16cm
包装尺寸: 76.3×37×21.5cm	Packing size: 76.3×37×21.5cm






B	H	L1	L2
160	660	590	860

DD-A017 36×4三基色

DD-A017 36×4 Three Basic Color Light

广泛适用于舞台,电影,多功能会议室,新闻演播室
Widely used for the situations of stage,film,multi-functions meeting room,News reporting hall.

电压:220V/50Hz	Voltage: 220V/50Hz
光源:36W灯管×4	Lamp: 36W tube×4
功率:144W	Power: 144W
净重: 7.5Kg 毛重: 9Kg	N.W:7.5Kg G.W: 9Kg
外型尺寸: 54×33×16cm	Outline size: 54×33×16cm
包装尺寸: 64×38×21.5cm	Packing size: 64×38×21.5cm





B	H	L1	L2
160	540	590	740



DDL-1-4A



DDL-1-4B

DDL-F4

DDL-1-4A / DDL-1-4B/ DDL-F4 四路信号扩大器

DDL-1-4A / DDL-1-4B/ DDL-F4 4 Channel Signal Distributor

- DMX512 信号输入
- 1路非隔离的直通输出,4路光隔离输出
- 各输入输出接口之间的电气隔离电压: > 1000V
- 电源:AC220V,50-60Hz
- 内尺寸:
  DDL-1-4A:48×12×4.5cm
  DDL-F4:30×9×26cm
  DDL-1-4B:30×9×26cm
- 包装尺寸:
  DDL-1-4A:50×16×9.1cm
  DDL-F4:31×13.5×30cm
  DDL-1-4B:31×13.5×30cm
- 净重: 毛重:
  DDL-1-4A:2.5kg 3.3kg
  DDL-F4:2.3kg 3.1kg
  DDL-1-4B:2.3kg 3.1kg

- DMX512 input
- 1 thru output without isolated,4 split output with optical isolated optical isolated > 1000V
- Power supply: AC220V,50-60Hz
- Size:
  DDL-1-4A:48×12×4.5cm
  DDL-F4:30×9×26cm
  DDL-1-4B:30×9×26cm
- Packing size:
  DDL-1-4A:50×16×9.1cm
  DDL-F4:31×13.5×30cm
  DDL-1-4B:31×13.5×30cm
- N.W: G.W:
  DDL-1-4A:2.5kg 3.3kg
  DDL-F4:2.3kg 3.1kg
  DDL-1-4B:2.3kg 3.1kg



DDL-1-6 六路信号扩大器

DDL-1-6 6 Channel Signal Distributor

- DMX512 信号输入
- 1路直通输出,6路信号扩大输出
- 电源:AC220V,50-60Hz
- 内尺寸:30×9×26cm
- 包装尺寸:31×13.5×30cm
- 净重:2kg 毛重: 2.5kg

- DMX512 input
- 1 thru output ,6 channel DMX distribution output
- Power supply: AC220V,50-60Hz
- Size: 30×9×26cm
- Packing size:31×13.5×30cm
- N.W: 2kg G.W: 2.5kg



DDL-1-8 八路信号扩大器

DDL-1-8 8 Channel Signal Distributor

- 两路DMX512 信号输入
- 2路非隔离的直通输出,8路光隔离输出
- 各输入输出接口之间的电气隔离电压: > 1000V
- 电源:AC220V,50-60Hz
- 外形尺寸:35×9.3×30cm
- 包装尺寸:38.5×13×31cm
- 净重:3.2 kg 毛重: 4.2 kg
- 2 DMX512 channel input
- 2 thru output without isolated,4 split output with optical isolated,optical isolated > 1000V
- Power supply: AC220V,50-60Hz
- Size: 35×9.3×30cm
- Packing size:38.5×13×31cm
- N.W: 3.2 kg G.W: 4.2 kg

DDL-40012 4KW 12路开关接线盒


DDL-40012 4KW 12 Channel Power Switch Pack

主要功能参数：

- ◎ 输入电压:三相四线AC380V或单相AC220V±10% 50-60Hz
- ◎ 输出功率:每路4KW
- ◎ 12路20A空气回路短路保护
- ◎ 尺寸:49×49×13cm
- ◎ 包装尺寸: 53.5×55.5×25.5cm
- ◎ 净重12Kg 毛重: 13.5 Kg

Main function and feature:

- ◎ Four wires and three phases 380V or single phases 220V±10% 50-60Hz
- ◎ Output power:4KW/CH
- ◎ 12 channels 20A switch output and triac
- ◎ Size: 49×49×13cm
- ◎ Packing size: 53.5×55.5×25.5cm
- ◎ N.W:12Kg G.W: 13.5 Kg

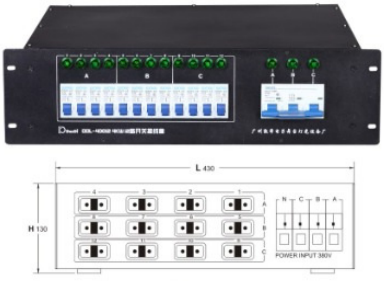

H	L
130	430

DDL-1202 2KW 12路开关接线盒


DDL-1202 2KW 12 Channel Power Switch Pack

主要功能参数：

- ◎输入电压:三相四线AC380V或单相AC220V±10% 50-60Hz
- ◎输出功率:每路2KW
- ◎12路10A空气回路短路保护
- ◎包装尺寸:52.7×24×18.5cm
- ◎净重4.3 Kg 毛重:5.7 Kg

Main function and feature:

- ◎ Four wires and three phases 380V or single phases 220V±10% 50-60Hz
- ◎ Output power:2KW/CH
- ◎ 12 channels 10A switch output and triac
- ◎ Size: 52.7×24×18.5cm
- ◎ N.W:4.3Kg G.W: 5.7Kg

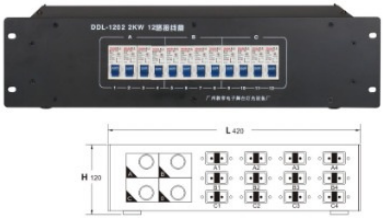

H	L
120	420

DDL-K300 电源箱

DDL-K300 Power Supply Pack

主要功能参数：

- ◎ 自带直通电源插座和高度灵敏度空气开关,方便工作照明配套设备的供电使用
- ◎ 单路或多路连接,接线既安全又方便
- ◎ 分四组三相四线AC380V独立输出, 每组40KW
- ◎ 有一组单相AC220V/2KW独立输出
- ◎ 外形尺寸:49×49×17cm
- ◎ 包装尺寸: 53.5×55.5×25.5cm
- ◎ 净重:12 Kg 毛重:13.5 Kg

Main function and feature:

- ◎ With power switch and high sensitive air switch,convenience for power supply of lamp equipment.
- ◎ Single or multi-channel connection,safe and easy.
- ◎ Four group four wires and three phases AC380V isolated output,40KW/CH
- ◎ One group 220V /2KW isolated output
- ◎ Outline size: 49×49×17cm
- ◎ Packing size: 53.5×55.5×25.5cm
- ◎ N.W:12Kg G.W: 13.5Kg



H	L
180	430





DDL-2412 36路直通电源箱

DDL-2412 36 channels power supply distribution

DDL-2412 直通电源箱为三相四线输入，采用三相225A总空气开关控制，同时采用16A空气开关分控的、24路单相的19芯输出和采用20A空气开关分控的、12路三芯16A防水座输出，一共36回路独立输出的直通电源箱。具有双重保护功能，专门针对用电设备的过流、短路而设计的配电产品；可供电脑灯具、常规灯具等设备使用，是流动演出最好的选择。

产品特点:
· 采用高品质空气开关作总控和分控二级控制，双保护功能;
· 具有电压和电流表实时检测三相输入电压和电流，使用方便;
· 分控空气开关具有过流、短路保护功能;
· 最新空气开关保险，过流自动关断;
· 三相输入、输出端具有电源指示灯;
· 每回路独立带接零、接地保护输出，安全可靠;
· 输入方式还可以按客户要求定做;
技术参数:
· 输入电源: 交流三相四线＋接地线;
· 输入电压: 相电压200-240VAC;
· 电源频率: 50Hz±2%;
· 输出电压: 电网相电压;
· 输出回路: 24路19芯、12路16A防水座;
· 额定功率: 19芯是10A ； 防水座是16A;
· 绝缘电阻: ＞2MΩ/DC1000V;
· 连续工作时间: 24小时;
· 接　　地: 机箱背板带有可靠的接地螺栓;
· 外形尺寸: 53×70×83cm;
重量: 30kg
工作环境:
· 环境温度: 0℃ ~ ＋45℃;
· 相对湿度: 20% ~ 80%;
· 大气压强: 86 ~ 106KPa;
· 工作环境: 通风良好，无大量烟尘、无强电磁干扰;
· 基本设备: 抽湿机、空调、静电地板;

DDL-2412 power supply distribution is 3 phases 4 wires input, we use three-phase 160A air switch as general control, while use 16A air switch as sub-control. 24 channels 19 pin output (each channel is 10A), 12 channels waterproof 3pin-16A output. Give you dual protection (over-current and short circuit). It's your best choice as touring power supply for moving lighting, conventional lighting and other equipments.

Leading Performance:
·High-quality air switch for general control and sub-control, dual protection;
·Three-phase voltage and current input real-time detection;
·Sub-control air switch with over-current, short circuit protection;
·Latest air switch insurance, automatic over-current shut down;
·Three-phase input and output with power indicator;
·Each channel has zero wire and ground wire, is safe and reliable;
·Input and output can also be customized according to customer requirements;
Technical Parameter:
·Input Power: 3 phases 4 wires, with ground wire;
·Input voltage: phase voltage 200-240VAC;
·Power frequency: 50Hz ± 2%;
·Output voltage: Grid phase voltage;
·Output channels: 24 channels 19 pin, 12 channels waterproof 16A;
·Rated Power: 19 pin, each channel of is 10A;
·Insulation resistance: ＞ 2MΩ/DC1000V;
·Continuous working time: 24 hours;
·Ground: chassis backplane with a reliable grounding bolt;
·Dimensions：53×70×83cm;
G.W：30kg
Work environment:
·24 hours of continuous work;
·Ambient temperature: 0 ℃ ~ +45 ℃;
·Relative Humidity: 20% ~ 80%;
·atmospheric pressure: 86 ~ 106KPa;
·Working environment: well-ventilated, without a lot of smoke, no strong electromagnetic interference;
·Basic equipment: Dehumidifier, air conditioning, static electricity floor;

此系列产品可按客户需求定做

This series products can be custom made according to specific requires

▼ 下面是部分客户定做产品图片

Following pictures are about part of customers' custom made



78路电源直通箱。

78 channels power supply distribution.



24路电源直通箱。

24 channels power supply distribution.



84路电源直通箱。

84 channels power supply distribution.



36路电源直通箱。

36 channels power supply distribution.



18路电源直通箱。

18 channels power supply distribution.

支架 Stands




DD056

图案夹 Logo clamp



DD057

遮光叶 Barndoors



DD160



DD180

索光圈 Iris



索光圈
(DD5-80330)

保险链 Safety Cable



Ø2保险链(DD039)
最大负荷(Max Load):10Kg
规格(Available Pipe):2×80mm



Ø3保险链(DD040)
最大负荷(Max Load):20Kg
规格(Available Pipe):3×80mm



Ø4保险链(DD041)
最大负荷(Max Load):50Kg
规格(Available Pipe):4×80mm



Ø5保险链(DD042)
最大负荷(Max Load):60Kg
规格(Available Pipe):5×80mm

挂钩 Clamps



铝半月钩(DD028)
最大负荷(Max Load):500Kg
适合口径(Available Pipe):52mm



铝活动半月钩(DD044)
最大负荷(Max Load):500Kg
适合口径(Available Pipe):52mm



铝垂直半月钩(DD047)
最大负荷(Max Load):500Kg
适合口径(Available Pipe):52mm



铝快速挂钩(DD048)
最大负荷(Max Load):200Kg
适合口径(Available Pipe):52mm



小铝钩(DD049)
最大负荷(Max Load):40Kg
适合口径(Available Pipe):40-60mm



铸铁钩(DD033)
最大负荷(Max Load):40Kg
适合口径(Available Pipe):40-60mm



7字铁钩(DD046)
最大负荷(Max Load):15Kg
适合口径(Available Pipe):40-60mm



小铁钩(DD032)
最大负荷(Max Load):8Kg
适合口径(Available Pipe):25-40mm


镜片 反光碗 Lens Reflector



Ø180水纹镜片
(DDJ180)



Ø180(MFL)镜片
(DDJ180VNSP)



Ø180(WFL)镜片
(DDJ180NSP)



Ø180(NSP)镜片
(DDJ180MFL)



Ø180(VNSP)镜片
(DDJ180WFL)



Ø200光学透镜
(DDT200)



Ø200螺纹镜
(DDJ200)



Ø200四环聚光镜
(DDS200)



Ø330反光碗
(DDW330)



Ø180反光碗
(DDW180)



Ø150反光碗
(DDW150)



Ø90反光碗
(DDW90)

NOTE 







DUNDI LIGHTING



CHINA map

We also carry on & process domestic and overseas OEM&ODM business & manufacturing,and special spare parts supplying.
承接国内外OEM,ODM制造及专特配件供应

Cordially Look For Agents Global
向全球诚征代理商

DISTRIBUTOR

本目录产品外形及功能如有改动恕不另行通知，以实物为准。
If there is any change of the products,no inform again.it depend on the real subject.

策划 · 摄影 · 设计 · 原创品牌 专线:(0)189 8866 6498

